
**Agricultural and forestry machines —
Inspection of sprayers in use —**

**Part 4:
Fixed and semi-mobile sprayers**

*Matériel agricole et forestier — Contrôle des pulvérisateurs en service —
Partie 4: Pulvérisateurs fixes et semi-mobiles*



STANDARDSISO.COM : Click to view the full PDF of ISO 16122-4:2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Requirements and method of verification	2
4.1 Leaks and dripping	2
4.1.1 Static leaks	2
4.1.2 Dynamic leaks	2
4.1.3 Spraying and dripping on parts	2
4.2 Pump(s)	2
4.2.1 Capacity	2
4.2.2 Pulsations	3
4.2.3 Air chamber	3
4.3 Spray mix agitation	3
4.3.1 Hydraulic	3
4.3.2 Mechanical	3
4.4 Spray liquid tank(s)	4
4.4.1 Lid	4
4.4.2 Filling hole(s)	4
4.4.3 Induction hopper	4
4.4.4 Pressure compensation	4
4.4.5 Tank content indicator(s)	4
4.4.6 Tank emptying	4
4.4.7 Tank filling	4
4.4.8 Cleaning device for plant protection product containers	5
4.4.9 Cleaning equipment	5
4.5 Measuring systems, controls and regulation systems	5
4.5.1 General	5
4.5.2 Pressure indicator	5
4.5.3 Other measuring devices	6
4.5.4 Pressure adjusting devices	6
4.5.5 Direct injection systems	6
4.6 Lines (pipes and hoses)	6
4.7 Filters	7
4.7.1 Filter presence	7
4.7.2 Isolating device	7
4.7.3 Filter insert changeability	7
4.8 Application unit	7
4.8.1 Dripping	7
4.8.2 Horizontal spray boom	7
4.8.3 Vertical spray boom	9
4.8.4 Spray guns and lances	10
4.9 Blower	10
4.9.1 Switching off	10
4.9.2 Adjustability	10
4.10 Distribution	10
4.10.1 Uniformity of spray jet	10
4.10.2 Nozzle output	10
4.10.3 Spray distribution measurement on a patternator (optional)	11
4.10.4 Optional vertical distribution information	11
4.11 Autonomous application units	11
4.11.1 Drive system	11

4.11.2	Travel speed spray robots.....	11
4.12	Cleaning equipment.....	12
5	Test methods.....	12
5.1	Test facilities.....	12
5.2	Spray and agitation pump(s).....	12
5.2.1	Pump capacity test.....	12
5.2.2	Pump pulsations.....	14
5.3	Sprayer pressure indicators.....	14
5.3.1	Specifications of pressure indicators used for verification.....	14
5.3.2	Verification method of the sprayer pressure indicator.....	15
5.4	Flow meters for controlling the volume/hectare rate.....	15
5.4.1	General.....	15
5.4.2	Operating procedure No.1: Verification by nozzle flow rate measurement.....	15
5.4.3	Operating procedure No.2: Verification by installing a standard flow meter on the circuit of the sprayer.....	15
5.5	System for controlling forward speed.....	15
5.6	Uniformity of the transverse volume distribution with a horizontal patternator.....	15
5.6.1	Specification of horizontal patternators used for verification.....	15
5.6.2	Calculation of the coefficient of variation (CV).....	16
5.6.3	Verification method of the uniformity of the transverse distribution.....	16
5.7	Flow rate of the spray nozzles.....	17
5.7.1	General.....	17
5.7.2	Measurement with nozzles fitted on the sprayer.....	17
5.7.3	Measurement with nozzles removed from the sprayer.....	17
5.8	Pressure drop.....	17
5.9	Pressure variation when the sections are closed.....	17
5.10	Pressure variation when the spray is switched off.....	17
5.11	Accuracy of direct injection systems.....	18
5.12	Pressure distribution.....	18
	Bibliography.....	19

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

ISO 16122-4 was prepared by the European Committee for Standardization (CEN) Technical Committee CEN/TC 144, *Tractors and machinery for agriculture and forestry*, in collaboration with ISO Technical Committee TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 6, *Equipment for crop protection*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

ISO 16122 consists of the following parts, under the general title *Agricultural and forestry machinery — Inspection of sprayers in use*:

- *Part 1: General*
- *Part 2: Horizontal boom sprayers*
- *Part 3: Sprayers for bush and tree crops*
- *Part 4: Fixed and semi-mobile sprayers*

Introduction

There are two main reasons for the inspection:

- less potential risk of environmental contamination by plant protection products;
- good control of the pest with the minimum possible input of plant protection product.

In order to use plant protection products in agricultural production safely, it is necessary to define the requirements and test methods for sprayers in use. This is a relevant step after having standardized minimum requirements for new sprayers, in respect of safety hazards (see ISO 4254-6) and potential risks of environmental contamination (see ISO 16119 series).

Standardising the requirements and methods for inspection of sprayers in use, takes into consideration not only the original performance of the sprayer, but also its use, care and maintenance. This is a logical link to ensure the continued benefit arising from the supply of new sprayers of good quality.

The inspection of sprayers in use can be a mandatory requirement or adopted on a voluntary basis. In both cases further requirements, outside the scope of this standard, are necessary for the management of inspections. These include, for example, requirements for the competence of persons carrying out inspections and the frequency of inspections.

NOTE National or local regulations may also apply concerning the qualifications and competence of inspectors.

Agricultural and forestry machines — Inspection of sprayers in use —

Part 4: Fixed and semi-mobile sprayers

1 Scope

This part of ISO 16122, when used together with ISO 16122-1, specifies the requirements and test methods for the inspection of fixed and semi-mobile sprayers, when in use.

The requirements relate mainly to the condition of the sprayer with respect to its potential risk for the environment and its performance to achieve good application.

It does not apply to application equipment for spatial treatment (e.g. foggers).

NOTE Requirements for the protection of inspectors during an inspection are given in ISO 16122-1.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5682-2:1997, *Equipment for crop protection — Spraying equipment — Part 2: Test methods for hydraulic sprayers*

ISO 16122-1:2015, *Agricultural and forestry machinery — Inspection of sprayers in use — Part 1: General*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 16122-1 and the following apply.

3.1

fixed sprayer

machine primarily for spraying plant protection products in covered structures, and where the *pump/tank unit* (3.3) and/or *application unit* (3.4) do not move

[SOURCE: ISO 16119-4:2014, 3.1]

3.2

semi-mobile sprayer

machine primarily for spraying plant protection products on crops grown in covered structures, and where the *pump/tank unit* (3.3) and *application unit* (3.4) are moveable

[SOURCE: ISO 16119-4:2014, 3.2]

3.3

pump/tank unit

device made at least by the pump and the spray liquid tank

Note 1 to entry: They can be built together as one unit or separate units.

3.4

application unit

device consisting of one or more nozzles/spray generators with or without air-assistance, and used with a separate pump/tank unit to which it is connected by a pipeline

[SOURCE: ISO 16119-4:2014, 3.4]

4 Requirements and method of verification

4.1 Leaks and dripping

4.1.1 Static leaks

The sprayer shall be filled with water to its nominal capacity.

With the pump not running and the sprayer parked on a level horizontal surface (in case of semi-mobile sprayer), a visual inspection for any leakage from the tank, pump and associated pipes shall be carried out.

For high capacity tanks, water filling can be reduced to no less than half of the nominal tank volume, provided an additional inspection of the tank is carried out in order to identify any cracks, holes or other damage that can cause leakage.

Compliance shall be checked by inspection.

4.1.2 Dynamic leaks

4.1.2.1 Leak-test when not spraying

With the sprayer running at a pressure which is equal to the maximum obtainable pressure for the system, with the section valves closed, there shall be no leakage from any part of the sprayer.

Compliance shall be checked by inspection.

4.1.2.2 Leak-test while spraying

While spraying at a pressure that is equal to the maximum working pressure recommended by the sprayer manufacturer, or the nozzle manufacturer for the nozzles mounted on the sprayer if lower, there shall be no leakage from any part of the sprayer.

Compliance shall be checked by inspection.

4.1.3 Spraying and dripping on parts

Regardless of the distance between the spray boom to the target to be sprayed, in the range between the nozzles and the target surface, no liquid shall be sprayed directly on to the sprayer itself (e.g. parts of the sprayer, hoses). This does not apply if needed by function (e.g. sensors) and if dripping is minimised.

Compliance shall be checked by inspection and function test.

4.2 Pump(s)

4.2.1 Capacity

4.2.1.1 General

The pump capacity shall be suited to the needs of the sprayer.

4.2.1.2 Sprayers built according to ISO 16119-4

The agitation capacity (liquid backflow in the tank) of the pump shall be at least equal to the value given in the instruction handbook.

Compliance shall be checked by measurement according to [5.2.1.3](#).

4.2.1.3 Other sprayers

- a) The pump capacity shall be at least 90 % of its original nominal flow given by the sprayer manufacturer or another minimum pump capacity given by the sprayer manufacturer.

Compliance shall be checked by measurement according to [5.2.1.2.3](#);

or for sprayers not fitted with a test adapter:

- b) The pump(s) shall have sufficient flow rate capacity in order to be able to spray while maintaining a visible agitation as specified in [4.3.1](#).

Compliance shall be checked by measurement according to [5.2.1.2.2](#).

4.2.2 Pulsations

The pulsations shall not exceed ± 10 % of the working pressure.

Compliance shall be checked by inspection, measurement and function test according to [5.2.2](#).

4.2.3 Air chamber

If an air chamber is present the membrane shall not be damaged, there shall be no appearance of liquid when operated at the maximum pressure recommended by the sprayer manufacturer. The air pressure shall be the pressure recommended by the sprayer manufacturer or between 30 % to 70 % of the working pressure for the nozzles in use.

Compliance shall be checked by function test and measurement.

4.3 Spray mix agitation

4.3.1 Hydraulic

A clearly visible agitation shall be maintained:

- when spraying at the maximum working pressure as recommended by the sprayer or nozzle manufacturer (whichever is the lower);
- with the largest nozzles mounted on the application unit;
- with pump rotation speed as recommended by the sprayer manufacturer;
- with the tank filled to half its nominal capacity.

Compliance shall be checked by inspection.

4.3.2 Mechanical

A clearly visible agitation shall be maintained when the agitation system is working as recommended by the sprayer manufacturer, with the tank filled to half its nominal capacity.

Compliance shall be checked by inspection.

4.4 Spray liquid tank(s)

4.4.1 Lid

The tank(s) shall be provided with a lid that shall be well adapted and in good condition.

This lid shall be tightly sealed to prevent leakage and shall avoid unintended opening. This requirement does not apply to fixed installations.

If a vent is fitted in the lid (according to [4.4.4](#)), it shall prevent spillage.

Compliance shall be checked by inspection.

4.4.2 Filling hole(s)

For semi-mobile sprayers there shall be a strainer in good condition in the filling hole(s).

Compliance shall be checked by inspection.

4.4.3 Induction hopper

If there is an induction hopper, it shall:

- prevent any object greater than 20 mm diameter from entering into the sprayer tank.

Compliance shall be checked by measurement.

- function and not leak.

Compliance shall be checked by function test.

4.4.4 Pressure compensation

There shall be a pressure compensation device to avoid over-pressure and under-pressure in the tank.

Compliance shall be checked by inspection.

4.4.5 Tank content indicator(s)

The volume of liquid in the tank shall be clearly readable from where the tank is filled.

Compliance shall be checked by inspection.

4.4.6 Tank emptying

It shall be possible to:

- empty the tank e.g. using a tap, and
- collect the liquid without contamination of the environment and without potential risk of exposure of the operator.

Compliance shall be checked by inspection.

4.4.7 Tank filling

If there is a water filling device on the sprayer, water from the sprayer shall be prevented from returning to the water source, e.g. by means of a non-return valve.

Compliance shall be checked by inspection and function test.

4.4.8 Cleaning device for plant protection product containers

If provided, the cleaning device for plant protection product containers shall function.

Compliance shall be checked by inspection and function test.

4.4.9 Cleaning equipment

If provided, tank cleaning devices, devices for external cleaning, devices for cleaning of induction hoppers, and devices for the internal cleaning of the complete sprayer, shall function.

Compliance shall be checked by inspection and function test.

4.5 Measuring systems, controls and regulation systems

4.5.1 General

All devices for measuring, indicating and/or adjusting the pressure and/or flow rate shall function.

The valves for switching on or off the spray shall function.

Switching on and off of all nozzles shall be possible simultaneously.

The controls to be operated during spraying shall be operable from the operator's position and the instrument displays shall be readable from this position.

If using a spray boom, switching on and off individual boom sections shall be possible.

Compliance shall be checked by inspection and function test.

4.5.2 Pressure indicator

4.5.2.1 General

A pressure indicator shall be present on the tank/pump unit.

An additional pressure indicator shall be present on the application unit, except for spray guns and lances manufactured before publication of ISO 16119-4.

The pressure indicators shall be fitted at a position where they are clearly readable. Pressure indicators shall be suitable for the working pressure range used.

Compliance shall be checked by inspection.

4.5.2.2 Diameter of analogue pressure indicator

For analogue pressure indicators the minimum diameter shall be 63 mm, except for those mounted on spray guns and lances which shall have a minimum diameter of 40 mm.

Compliance shall be checked by measurement.

4.5.2.3 Scale of analogue pressure indicator

The scale of analogue pressure indicators shall provide graduations:

- at least every 0,2 bar¹⁾ for working pressures less than 5 bar;
- at least every 1,0 bar for working pressures between 5 bar and 20 bar;

1) 1 bar = 0,1 MPa = 0,1 N/mm² = 10⁵N/m².

- at least every 2,0 bar for working pressures more than 20 bar.

Compliance shall be checked by inspection.

4.5.2.4 Accuracy of pressure indicator

The accuracy of the pressure indicator shall be:

- $\pm 0,2$ bar for working pressures at 2 bar and below;
- ± 10 % of the real value for pressures at 2 bar and above.

This requirement shall be achieved within the working pressure range suitable for the nozzles mounted on the sprayer under test.

Compliance shall be checked by measurement according to [5.3](#).

4.5.3 Other measuring devices

Measuring devices other than pressure indicators, especially flow meters and forward speed sensors used for controlling the volume/hectare rate shall measure within a maximum error of ± 5 % of the value read on the reference instrument within the range of the measuring device.

Compliance shall be checked by measurement according to [5.4](#) and [5.5](#).

4.5.4 Pressure adjusting devices

All devices for adjusting pressure shall maintain a constant pressure with a tolerance of ± 10 % at constant setting and shall return within 10 s to the original working pressure ± 10 % after the sprayer has been switched off and on again.

Compliance shall be checked by function test and measurement according to [5.10](#).

4.5.5 Direct injection systems

Direct injection systems shall:

- not leak;
- have no backflow leakage through the chemical pathway or water inlet of the dosing unit;
- have a mixing chamber on the outlet side.

The injection rate of the chemical shall not deviate from what is set on the dosing device by more than ± 10 %.

Compliance shall be checked by inspection, function test and measurement according to [5.11](#).

4.6 Lines (pipes and hoses)

Lines shall not show excessive bending, corrosion and abrasion through contact with surrounding surfaces. Lines shall be free from defects such as excessive surface wear, cuts or cracks.

Compliance shall be checked by inspection.

4.7 Filters

4.7.1 Filter presence

There shall be at least one filter to be placed either:

- on the pressure side of the pump, as close as possible to the application unit;
- or
- on the tank unit, when the application unit is a spray gun or lance.

In the case of sprayers with positive displacement pumps and fixed sprayers, there shall also be a filter on the suction side.

NOTE Nozzle filters are not considered as pressure side filters.

The filter(s) shall be in good condition and the mesh size shall correspond to the nozzles fitted according to the instructions of the nozzle manufacturer.

Compliance shall be checked by examination of specification and inspection.

4.7.2 Isolating device

It shall be possible, with the tank filled to its nominal volume, to clean filters without any spray liquid leaking out, except for that which may be present in the filter casing and the suction lines.

Compliance shall be checked by function test.

4.7.3 Filter insert changeability

Filter inserts shall be changeable in accordance with the sprayer manufacturers' instructions.

Compliance shall be checked by inspection and function test.

4.8 Application unit

4.8.1 Dripping

After being switched off there shall be no continuous dripping from nozzles 5 s after the spray jet has collapsed.

Compliance shall be checked by inspection.

4.8.2 Horizontal spray boom


4.8.2.1 Stability / Alignment (not for hand-held or carried booms)

The boom shall be stable in all directions, i.e. no excessive movement caused by wear and/or permanent deformation.

When measured with the horizontal spray boom stationary, the vertical distance between the lower edges of each nozzle and a horizontal reference line (e.g. on level horizontal surface) shall not vary more than ± 10 cm or $\pm 0,5$ % of the working width, whichever is the highest.

The boom shall not be bent in the horizontal plane: the maximum deformation d from the centre-frame to the boom end nozzle shall not exceed $\pm 2,5$ % of the boom width. See [Figure 1](#).

Compliance shall be checked by inspection and measurement.

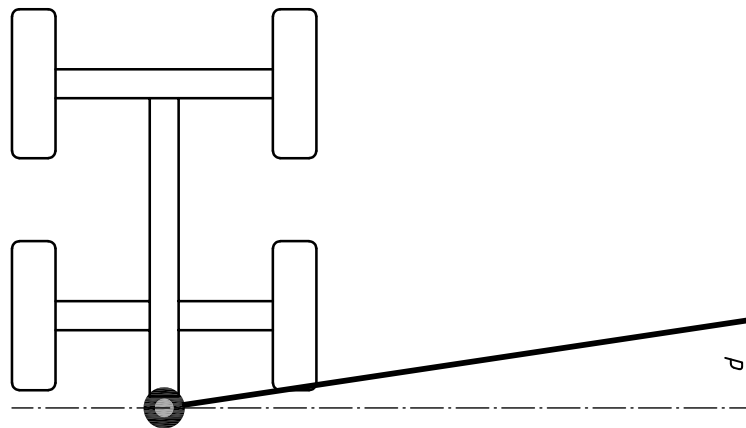

Key

- 1 boom centre
- d maximum deformation distance from the centre-frame to boom end nozzle

Figure 1 — Horizontal deviation of the boom

4.8.2.2 Nozzles

4.8.2.2.1 Similarity

All nozzles fitted to the booms shall be of the same type, size, material and produced by the same manufacturer, except where they are intended for a special function (e.g. the end nozzles for border spraying, bed spraying or band spraying).

Other components (e.g. nozzle filters, anti-drip devices) shall be equivalent over the length of the boom. Compliance shall be checked by inspection.

4.8.2.2.2 Spacing/orientation

The nozzle spacing and their orientation shall be uniform along the boom.

The nozzle spacing (adjacent nozzle centre to centre distance) shall be within $\pm 5\%$ of their nominal distance.

The verticality of the nozzle body shall be achieved with a maximum deviation of 10° .

In case of special design or applications (e.g. border spraying), nozzle body spacing, orientation and configuration shall correspond to the manufacturer's design specification.

It shall not be possible to modify unintentionally the position of the nozzles in working conditions, for example by folding/unfolding the boom.

Compliance shall be checked by inspection and measurement.

4.8.2.3 Height adjustment

If provided, height adjustment devices shall function.

Compliance shall be checked by inspection and function test.

4.8.2.4 Damping

When provided, devices for damping unintended boom movements shall function (e.g. well-functioning and not damaged springs, gas dampers or rubber buffers).

Compliance shall be checked by inspection and function test.

4.8.2.5 Compensative returns

When measured at the inlet of each boom sections or read on the spray pressure indicator, 10 s after a section has been closed, the pressure shall not vary more than 10 %, when the sections are closed one by one.

This requirement is only applicable for sprayer equipped with boom valves which can be set to return the same liquid volume to the tank when closed that would otherwise go through the nozzles on that boom section when the valve is open.

Compliance shall be checked by measurement according to [5.9](#).

4.8.2.6 Pressure drop

The pressure drop between the point on the sprayer where the indicated spray pressure is measured during working and the outermost end of each boom section shall not exceed 10 %.

In case of using measurement on a patternator ([4.10.3](#)), only one measuring point at one outer end of the boom is required.

Compliance shall be checked by measurement according to [5.8](#).

4.8.3 Vertical spray boom

4.8.3.1 Symmetry

The nozzle arrangement (e.g. nozzle types, sizes, material and production by the same manufacturer) shall be symmetrical on the left and right hand sides, except where they are intended for a special function (e.g. spraying on one side, fitting of nozzles to compensate the air distribution asymmetry, etc.).

Compliance shall be checked by inspection.

4.8.3.2 Switching off

If provided, the system to switch off each nozzle separately shall function.

In the case of multi-head nozzles, this requirement applies to each multi-head nozzle.

Compliance shall be checked by inspection and function test.

4.8.3.3 Adjustment

It shall be possible to adjust the position of the nozzles in a symmetric and reproducible manner.

Compliance shall be checked by inspection.

4.8.3.4 Pressure drop

The pressure drop between the measuring point for pressure on the sprayer and pressure measured at the nozzle which is the furthest from the feeding point of the spray line, shall not exceed 15 % of the pressure shown on the pressure indicator.

Compliance shall be checked by measurement according to [5.8](#).

4.8.3.5 Compensative returns

When measured at the inlet of each boom sections or read on the spray pressure indicator, 10 s after a section has been closed, the pressure shall not vary more than 10 %, when the sections are closed one by one.

This requirement is only applicable for sprayer equipped with boom valves which can be set to return the same liquid volume to the tank when closed that would otherwise go through the nozzles on that boom section when the valve is open.

Compliance shall be checked by measurement according to [5.9](#).

4.8.4 Spray guns and lances

4.8.4.1 Trigger

The trigger shall function. It shall be lockable in the closed position and not lockable in the open position.

The opening and closing system installed on the gun shall have a quick stop and opening. There shall be no continuous dripping when the trigger is « off » (closed position).

Compliance shall be checked by inspection and function test.

4.8.4.2 Adjustment of flow rate and angle

If the flow rate and/or spray angle of the spray gun is adjustable, the adjustment device shall function.

Compliance shall be checked by inspection and function test.

4.9 Blower

4.9.1 Switching off

If the blower can be switched off separately from other driven parts of the sprayer, the switching off system shall function.

Compliance shall be checked by function test.

4.9.2 Adjustability

Adjustable air guide plates on the blower and on an additional blower casing shall function.

Compliance shall be checked by inspection and function test.

4.10 Distribution

4.10.1 Uniformity of spray jet

With the blower switched off in the case of hydraulic nozzles and switched on in the case of other nozzles (for example pneumatic nozzles), each nozzle shall form a uniform spray jet (e.g. uniform shape, homogeneous spray).

Compliance shall be checked by inspection and function test.

4.10.2 Nozzle output

4.10.2.1 Nominal nozzle flow rate known

The deviation of the flow rate of each nozzle of the same type and size shall not exceed ± 15 % of the nominal flow rate indicated by the nozzle manufacturer for the maximum working pressure given by the nozzle manufacturer.

Compliance shall be checked by measurement according to [5.7](#).

4.10.2.2 Nominal nozzle flow rate unknown

The flow rate of a single nozzle shall not exceed $\pm 5\%$ of the average flow rate of the nozzles of the same type and size mounted on the sprayer.

In case of only two nozzles of a same type and size, the average value is not considered but the deviation between the two nozzles.

For sprayers with only one spray liquid output, or with adjustable flow rate nozzles, the flow rate has to be measured but no indication of wear can be provided.

Compliance shall be checked by measurement according to [5.7](#).

4.10.3 Spray distribution measurement on a patternator (optional)

4.10.3.1 General

a) The transverse distribution, within the total overlapped range, shall be uniform. The transverse distribution is evaluated on the basis of the coefficient of variation which shall not exceed 10 %;

and

b) the amount of liquid collected by each patternator groove within the overlapped range shall not deviate more than $\pm 20\%$ of the total average value.

Compliance shall be checked by measurement according to [5.6](#).

4.10.3.2 Pressure distribution

When the nozzle flow rate is measured according to [5.7.2](#) or [5.7.3](#):

- the pressure at each boom section inlet shall not exceed $\pm 10\%$ of the average pressure measured on all boom section inlets;
- the pressure at the inlet and outer end of each boom section shall not drop more than 10 %, when spraying with the largest nozzle set mounted on the sprayer.

Compliance shall be checked by measurement according to [5.12](#).

4.10.4 Optional vertical distribution information

In case of vertical boom sprayers and similar, in order to provide the owner/operator with further information, the vertical spray distribution information may be provided for example by measurement, using a vertical patternator; or by other visualization means.

NOTE Test method and vertical patternator specifications are still under development

4.11 Autonomous application units

4.11.1 Drive system

The drive system (drive wheels/rolls, motor, battery, etc.) shall be in good condition and function.

Compliance shall be checked by inspection and function test.

4.11.2 Travel speed spray robots

Travel speed shall not deviate more than $\pm 10\%$ from those declared by the manufacturer.

Compliance shall be checked by measurement according to [5.5](#).

4.12 Cleaning equipment

If provided cleaning devices shall function.

Compliance shall be checked by inspection and function test.

5 Test methods

5.1 Test facilities

In complement to the test benches described below, the following test apparatus are needed for the inspection:

- tachometer (P.T.O) with maximum error of ± 10 rpm;
- measuring tape (nozzle spacing and height);
- stop watch (flow rate; distribution);
- measuring cylinder (with measuring range 2 l; scale graduation 20 ml; error ± 20 ml);
- air pressure indicator (pressure pulsation damper).

Different test equipment and methods can be used, if at least the same measuring results and accuracy is achieved.

5.2 Spray and agitation pump(s)

5.2.1 Pump capacity test

5.2.1.1 Test equipment

The error of the flow meter shall not exceed $\pm 2\%$ of the measured value when the capacity of the pump is > 100 l/min and 2 l/min when the capacity of the pump is < 100 l/min.

The flow measuring device shall have a transparent part to identify air leakages on the pump's suction side.

The test equipment shall have a provision that the pressure can be increased up to 10 bar.

5.2.1.2 Test method

5.2.1.2.1 General

The pump capacity shall be measured using one of the following procedures:

5.2.1.2.2 Sprayers not fitted with a test adapter

On sprayers not fitted with a test adapter, when the pump capacity is not given by the sprayer manufacturer for the pump mounted on the sprayer or for pumps for which the maximum working pressure is not known (see [4.2.1](#)), a calibrated pressure indicator shall be placed at an end nozzle and the maximum working pressure recommended by the sprayer manufacturer or the nozzle manufacturer shall be established and used.

5.2.1.2.3 Other sprayers

The spray tank shall be filled with clean water to half its nominal volume. A correct and clean filter shall be placed on the suction side of the pump in accordance with the sprayer manufacturer's instructions.

The measurement shall be carried out with the nominal pump rotation speed recommended by the sprayer manufacturer.

- There shall be neither leakage nor air ingress from any connection.
- Connect the measuring device as close as possible to the pump outlet or at a position provided by the sprayer manufacturer.
- In case of multiple pump outlets, the measuring device shall be connected, either on each outlet separately or all outlets connected together.
- Calculate the total capacity of the pump(s).
- Water discharged from the measuring device should be fed back into the spray tank.
- The flow shall be measured without any forced counter-pressure from the measuring device and at a pressure between 8 ($\pm 0,2$) bar and 10 ($\pm 0,2$) bar, or if lower at the highest permitted working pressure for the pump.

5.2.1.3 Backflow for agitation

5.2.1.3.1 General

The spray tank shall be filled with clean water to half its nominal volume. A correct and clean filter shall be placed on suction side of the pump in accordance with the sprayer manufacturer's instructions.

The measurement shall be carried out:

- when spraying at maximum working pressure as recommended by the sprayer or nozzle manufacturer (whatever is the highest);
- with the largest nozzles recommended;
- with the nominal pump rotation speed as recommended by the sprayer manufacturer;
- with the maximum number of application units connected;
- following one of the methods given in [5.2.1.3.2](#) or [5.2.1.3.3](#).

There shall be neither leakage nor air inlet from any connection.

5.2.1.3.2 Measuring the backflow for agitation

The measuring device shall be connected on all return / agitation line(s) separately or together in order to determine the total backflow.

The measured value(s) shall be recorded.

Water discharged from the measuring device should be fed back into the spray tank.

The recorded values shall be added to determine the total backflow.

5.2.1.3.3 Calculating the backflow for agitation

Connect the measuring device as close as possible to the pump outlet or at a position provided by the sprayer manufacturer.

In case of multiple pump outlets, the measuring device shall be connected, either on each outlet separately or all outlets connected together.

Calculate the total capacity of the pump(s).

Water discharged from the measuring device should be fed back into the spray tank.

Measure or calculate the total discharge from the application unit(s) (T_D).

Calculate the back flow (i.e. agitation capacity) in the tank using the following formula:

$$B_F = P_C - T_D$$

where

B_F is the back flow (l/min);

P_C is the measured pump capacity (l/min);

T_D is the total discharge from application units(s) (l/min).

5.2.2 Pump pulsations

Pulsations shall be checked:

- with the nominal rotation speed of the pump;
- at the location of the sprayer's pressure indicator (with the calibrated test pressure indicator or the pressure indicator of the sprayer if the requirement of 4.5.2 is met);
- with the intended working pressure.

5.3 Sprayer pressure indicators

5.3.1 Specifications of pressure indicators used for verification

Analogue pressure indicators used for verification shall have a minimum diameter of 100 mm. Other minimum requirements on pressure indicators used for verification are given in Table 1.

**Table 1 — Characteristics of pressure indicators used for verification
(in accordance with EN 837-1)**

Pressure to measure Δp bar	Scale unit max. bar	Accuracy bar	Class required	Scale end value bar
$0 < \Delta P \leq 6$	0,1	0,1	1,6	6
			1,0	10
			0,6	16
$6 < \Delta P \leq 16$	0,2	0,25	1,6	16
			1,0	25
$\Delta P > 16$	1,0	1,0	2,5	40
			1,6	60
			1,0	100
1 bar = 0,1 MPa = 0,1 N/mm ² = 10 ⁵ N/m ² .				