

INTERNATIONAL STANDARD



INTERNATIONAL ORGANIZATION FOR STANDARDIZATION
ORGANISATION INTERNATIONALE DE NORMALISATION
МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ

ISO
5855-2

Second edition
1988-12-15

Corrected and reprinted
1989-09-01

Aerospace — MJ threads —

Part 2 :
Limit dimensions for bolts and nuts

Aéronautique et espace — Filetage MJ —

Partie 2 : Dimensions limites pour vis et écrous

STANDARDSISO.COM : Click to view the full PDF of ISO 5855-2:1988

Reference number
ISO 5855-2:1988 (E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 5855-2 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*.

This second edition cancels and replaces the first edition (ISO 5855-2 : 1981), of which it constitutes a technical revision.

ISO 5855 consists of the following parts, under the general title *Aerospace — MJ threads*:

- *Part 1: General requirements*
- *Part 2: Limit dimensions for bolts and nuts*
- *Part 3: Limit dimensions for fittings for fluid systems*

Aerospace — MJ threads —

Part 2 :

Limit dimensions for bolts and nuts

1 Scope

This part of ISO 5855 specifies limit dimensions of MJ threads for bolts and nuts of nominal diameter 1,6 mm to 39 mm for aerospace construction.

Limit dimensions of threads for bolts and nuts of nominal diameter 1,2 mm or less are given in ISO/R 1501.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 5855. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 5855 are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 965-1 : 1980, *ISO general purpose metric screw threads — Tolerances — Part 1 : Principles and basic data*.

ISO/R 1501 : 1970, *ISO miniature screw threads*.

ISO 5855-1 : 1988, *Aerospace — MJ threads — Part 1 : General requirements*.

3 Nominal diameters and pitches

See table 1.

Table 1 — Nominal diameters and pitches

Dimensions in millimetres

Nominal diameter <i>d</i> or <i>D</i>	Pitch <i>P</i>	Nominal diameter <i>d</i> or <i>D</i>	Pitch <i>P</i>
1,6	0,35	14	1,5
2	0,4	16	1,5
2,5	0,45	18	1,5
3	0,5	20	1,5
3,5	0,6	22	1,5
4	0,7	24	2
5	0,8	27	2
6	1	30	2
7	1	33	2
8	1	36	2
10	1,25	39	2
12	1,25		

4 Tolerance classes

See table 2.

Table 2 — Tolerance classes

Bolt threads		Nut threads	
<i>d</i>	6h	<i>D</i> ₁	6H for nominal diameter ≤ 5 mm 5H for nominal diameter > 6 mm
<i>d</i> ₂	4h	<i>D</i> ₂	4H

5 Provisions for coated threads

Before coating, the dimensions of the threads shall be compatible with the thickness of the coating selected and with the limit dimensions for finished parts specified in clause 6.

6 Limit dimensions for finished parts (coated or non-coated)

6.1 Bolt threads

Figure 1 illustrates the position and the form of the limit profiles (maximum and minimum) in relation to the basic profile (see ISO 5855-1).

Tables 3 and 4 specify the limit dimensions.

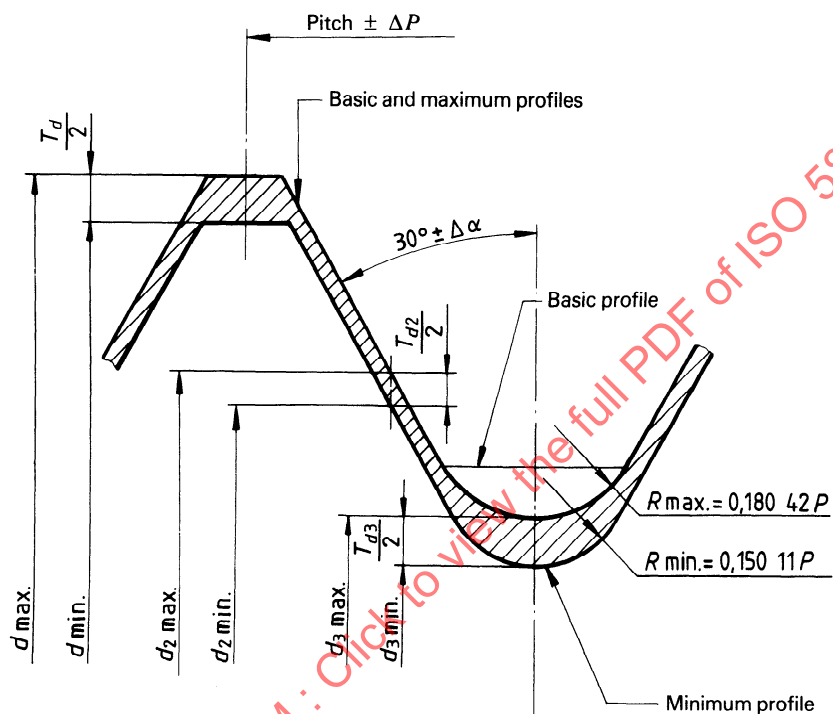


Figure 1 — Limit profiles for bolt threads

Table 3 — Limit dimensions for 4h6h threads for bolts

Dimensions in millimetres

Thread designation	Major diameter d			Pitch diameter d_2			Minor diameter d_3		
	max.	min.	T_d (6h) ¹⁾	max.	min.	T_{d2} (4h) ¹⁾	max.	min.	T_{d3}
MJ1,6 × 0,35 — 4h6h	1,6	1,515	0,085	1,373	1,333	0,04	1,196	1,135	0,061
MJ2 × 0,4 — 4h6h	2	1,905	0,095	1,74	1,698	0,042	1,538	1,472	0,066
MJ2,5 × 0,45 — 4h6h	2,5	2,4	0,1	2,208	2,163	0,045	1,98	1,908	0,072
MJ3 × 0,5 — 4h6h	3	2,894	0,106	2,675	2,627	0,048	2,423	2,345	0,078
MJ3,5 × 0,6 — 4h6h	3,5	3,375	0,125	3,11	3,057	0,053	2,807	2,718	0,089
MJ4 × 0,7 — 4h6h	4	3,86	0,14	3,545	3,489	0,056	3,192	3,094	0,098
MJ5 × 0,8 — 4h6h	5	4,85	0,15	4,48	4,42	0,06	4,076	3,968	0,108
MJ6 × 1 — 4h6h	6	5,82	0,18	5,35	5,279	0,071	4,845	4,713	0,132
MJ7 × 1 — 4h6h	7	6,82	0,18	6,35	6,279	0,071	5,845	5,713	0,132
MJ8 × 1 — 4h6h	8	7,82	0,18	7,35	7,279	0,071	6,845	6,713	0,132
MJ10 × 1,25 — 4h6h	10	9,788	0,212	9,188	9,113	0,075	8,557	8,406	0,151
MJ12 × 1,25 — 4h6h	12	11,788	0,212	11,188	11,103	0,085	10,557	10,396	0,161
MJ14 × 1,5 — 4h6h	14	13,764	0,236	13,026	12,936	0,09	12,268	12,087	0,181
MJ16 × 1,5 — 4h6h	16	15,764	0,236	15,026	14,936	0,09	14,268	14,087	0,181
MJ18 × 1,5 — 4h6h	18	17,764	0,236	17,026	16,936	0,09	16,268	16,087	0,181
MJ20 × 1,5 — 4h6h	20	19,764	0,236	19,026	18,936	0,09	18,268	18,087	0,181
MJ22 × 1,5 — 4h6h	22	21,764	0,236	21,026	20,936	0,09	20,268	20,087	0,181
MJ24 × 2 — 4h6h	24	23,72	0,28	22,701	22,595	0,106	21,691	21,464	0,227
MJ27 × 2 — 4h6h	27	26,72	0,28	25,701	25,595	0,106	24,691	24,464	0,227
MJ30 × 2 — 4h6h	30	29,72	0,28	28,701	28,595	0,106	27,691	27,464	0,227
MJ33 × 2 — 4h6h	33	32,72	0,28	31,701	31,595	0,106	30,691	30,464	0,227
MJ36 × 2 — 4h6h	36	35,72	0,28	34,701	34,595	0,106	33,691	33,464	0,227
MJ39 × 2 — 4h6h	39	38,72	0,28	37,701	37,595	0,106	36,691	36,464	0,227

1) In accordance with ISO 965-1.

Table 4 — Root radii for bolt threads

Dimensions in millimetres

Pitch P	Root radius R	
	max.	min.
0,35	0,063	0,053
0,4	0,072	0,06
0,45	0,081	0,068
0,5	0,09	0,075
0,6	0,108	0,09
0,7	0,126	0,105
0,8	0,144	0,12
1	0,18	0,15
1,25	0,226	0,188
1,5	0,271	0,225
2	0,361	0,3

6.2 Nut threads

Figure 2 illustrates the position and the form of the limit profiles (maximum and minimum) in relation to the basic profile (see ISO 5855-1).

Table 5 specifies the limit dimensions.

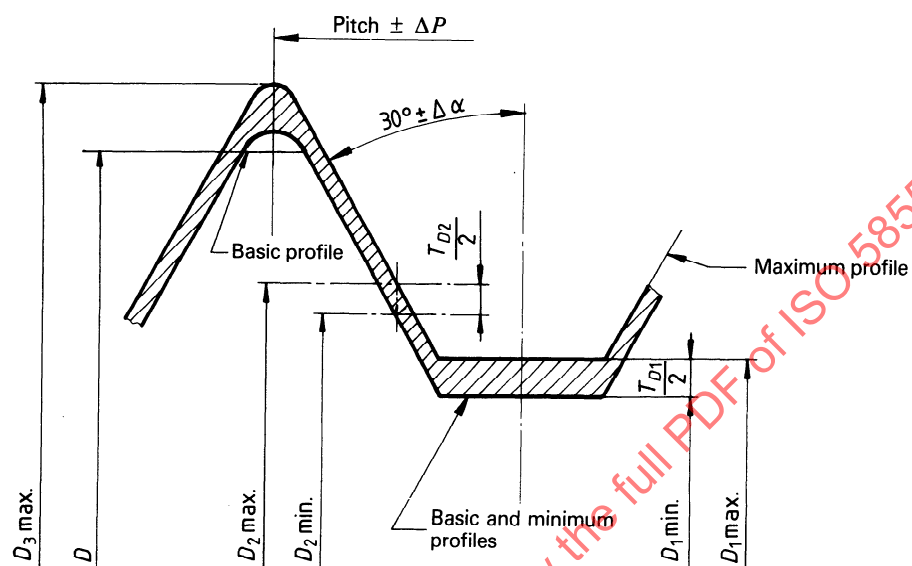


Figure 2 – Limit profiles for nut threads