_

RATIONALE

THIS REVISION ADDS TOLERANCE TO THE SHANK LENGTH FOR AN115913 THRU AS115916 AND UPDATES THE STANDARD TO APPLY CURRENT STANDARDS.

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD AN115901 THRU AN115950, REVISION 3. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

WARNING

THIS DOCUMENT INCLUDES CADMIUM AS A PLATING MATERIAL. THE USE OF CADMIUM AS BEEN RESTRICTED AND/OR BANNED FOR USE IN MANY COUNTRIES DUE TO ENVIRONMENTAL AND HEALTH CONCERNS. THE USER SHOULD CONSULT WITH LOCAL OFFICIALS ON THE ENVIRONMENTAL AND HEALTH REGULATIONS REGARDING ITS USE.

THIRD ANGLE PROJECTION

THIRD ANGLE PROJECTION

CUSTODIAN: SAE E-25



AEROSPACE STANDARD

(R) SCREW - FLAT FILLISTER, DRILLED HEAD, CADMIUM PLATED, STEEL UNS G87400, 125 KSI MIN .2500-28 UNF - 3A **AS115901 THRU AS115950** SHEET 1 OF 3

REV. A

REVISED 2006-09


REAFFIRMED 2003-10

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.



AS115901 THRU AS115950

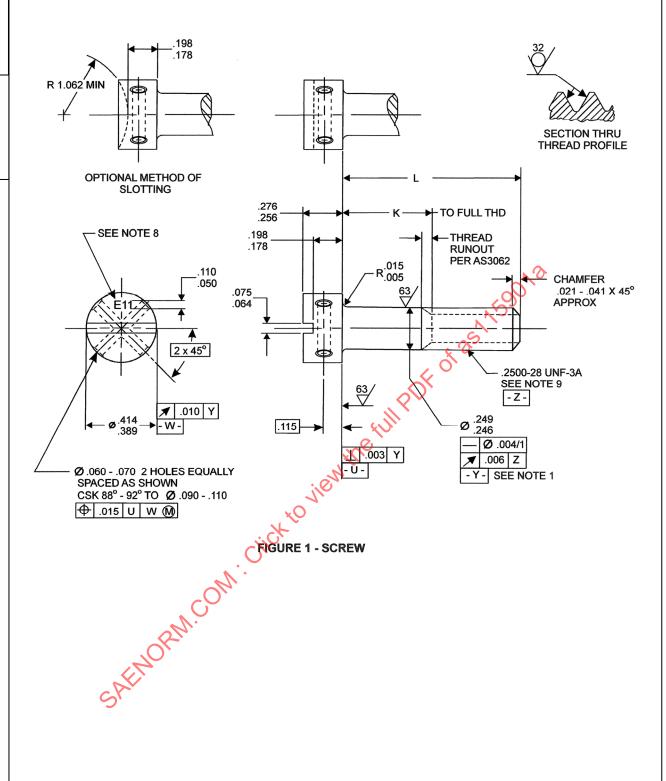

AEROSPACE STANDARD (R) SCREW - FLAT FILLISTER, DRILLED HEAD,

CADMIUM PLATED, STEEL UNS G87400, 125 KSI MIN

.2500-28 UNF - 3A