

AS1476A

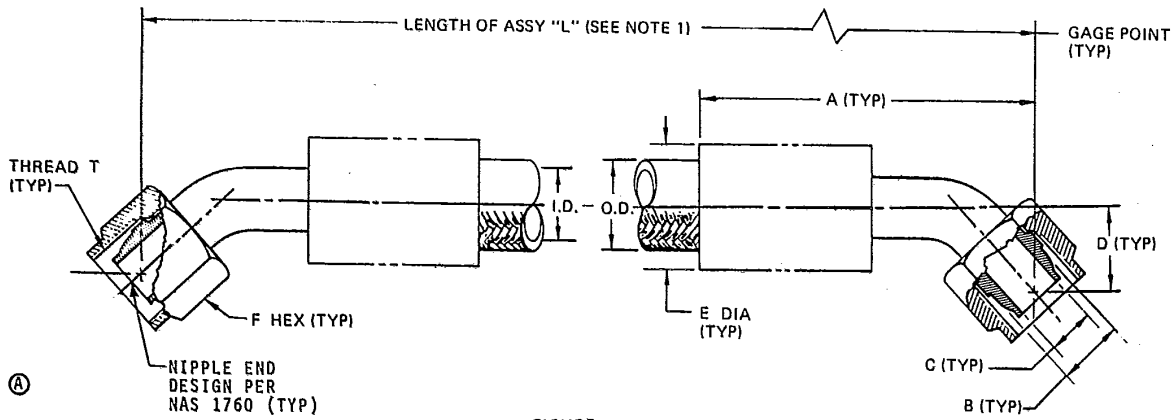


FIGURE 1

TABLE I

BASIC HOSE END FITTING DIMENSIONS

HOSE ASSEMBLY NO. AND SIZE CODE	HOSE ASSY. SIZE (REF)	THREAD T PER MIL-S-8879 (REF)	A MAX	B GAGE DIA. BASIC	C MIN. DIA. THRU 2	D		E MAX. 3	F HEX ACROSS FLATS (REF)	HOSE I.D. MIN.	HOSE O.D.	
						MIN.	MAX.				MIN.	MAX.
AS1476E	1/4	.4375-20 UNJF-3B	1.80	.2930	.174	.33	.39	.67	.56	.235	.35	.39
AS1476G	3/8	.5625-18 UNJF-3B	2.16	.4120	.291	.42	.48	.82	.69	.360	.54	.57
AS1476H	1/2	.7500-16 UNJF-3B	2.51	.5600	.409	.47	.53	1.03	.88	.485	.68	.73
AS1476J	5/8	.8750-14 UNJF-3B	2.84	.6730	.495	.57	.63	1.18	1.00	.610	.81	.86
AS1476K	3/4	1.0625-12 UNJ-3B	3.17	.8100	.646	.62	.68	1.47	1.25	.735	.93	.98
AS1476M	1	1.3125-12 UNJ-3B	3.80	1.0620	.898	.76	.82	1.75	1.50	.985	1.20	1.24

TABLE II

(A)

LENGTH INCREMENTS AND TOLERANCE

HOSE ASSEMBLY LENGTH	AVAILABLE INCREMENTS	TOLERANCE
UNDER 18 INCHES	(NOT LESS THAN) .125 INCH	(PLUS OR MINUS) .125 INCH
18 TO 36 INCHES	(NOT LESS THAN) .250 INCH	(PLUS OR MINUS) .250 INCH
36 TO 100 INCHES	(NOT LESS THAN) .250 INCH	(PLUS OR MINUS) .375 INCH
100 TO 500 INCHES	(NOT LESS THAN) .500 INCH	(PLUS OR MINUS) 1/2 PERCENT
OVER 500 INCHES	(NOT LESS THAN) 1.000 INCH	(PLUS OR MINUS) 1 PERCENT

(A) TABLE III

HOSE ASSEMBLY WEIGHT INFORMATION

HOSE SIZE (REF)	MAXIMUM WEIGHTS			HOSE LENGTH CORRECTION FACTOR INCH 4	
	HOSE LBS/ INCH	STANDARD END FITTING (LBS) EACH			
		CODE "D"	CODE "S"		CODE "J"
04	.004	.027		.048	.71
06	.008	.046		.079	.88
08	.011	.076		.122	.95
10	.014	.116		.181	1.13
12	.018	.169		.281	1.33
16	.024	.260		.420	1.56

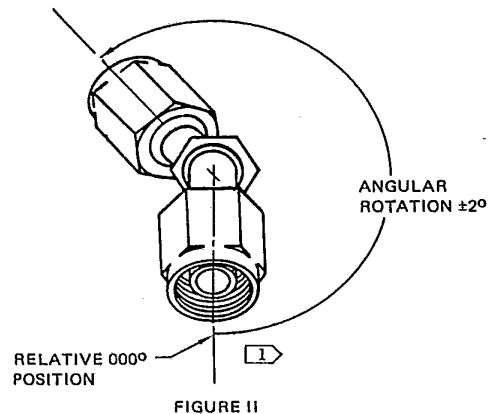


FIGURE II

PREPARED BY SAE COMMITTEE G-3, AEROSPACE FITTING, HOSE AND TUBING ASSEMBLIES

SAE The Engineering Resource For Advancing Mobility

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

HOSE ASSEMBLY, FLEXIBLE, LOW PRESSURE, FLARELESS, PORTABLE WATER, 45° TO 45°

AS1476A

SH 1 OF 2

Issued April 1979 Revised (A) March 1983