

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

SAE AS1716

RATIONALE

FEDERAL SUPPLY CLASS
4730

AS1716D HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.


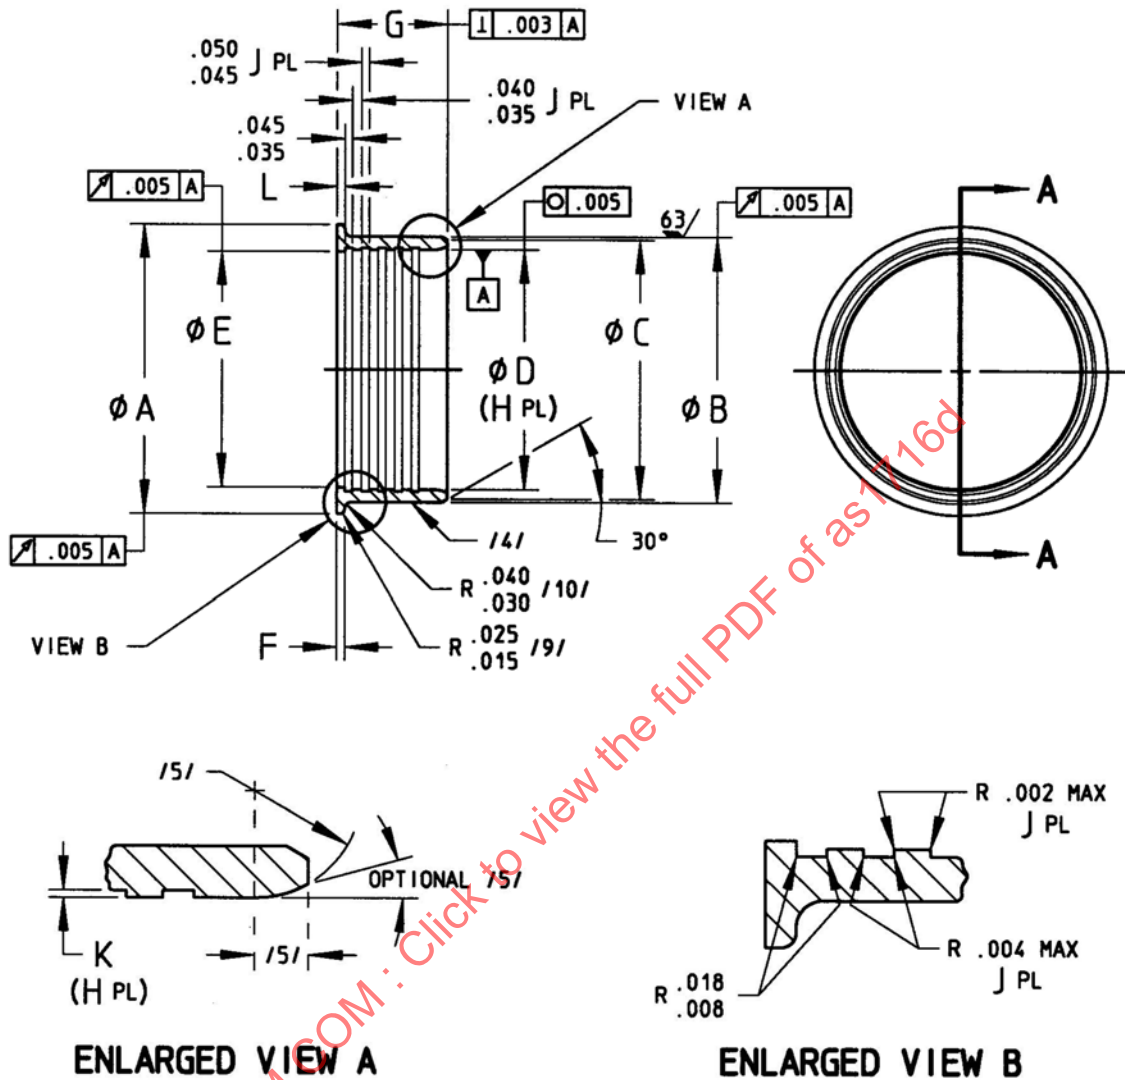


FIGURE 1 - FERRULE

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1716D>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1710

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FERRULE, COUPLING, FLEXIBLE,
VARIABLE CAVITY, THREADED,
FERRULE TUBE END

SAE AS1716
SHEET 1 OF 3

REV.
D

Copyright 2013 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1982-05 REVISED 2006-08 REAFFIRMED 2013-01

TABLE 1 – FERRULE DIMENSIONS AND WEIGHTS

BASIC NO. AS1716 SIZE CODE	TUBE SIZE	A /11/	B + .000/- .005	C	D /12/	E ±.005	F + .005/- .000	G	H PLCS	J PLCS	K /13/	L	WEIGHT LB/EA APPROX. REF.
-08	.500	.686	.625	.592	.504	.483	.035	.555	5	4	.010	.045/.035	.006
-10	.625	.811	.750	.717	.630	.609	.035	.555	5	4	.010	.045/.035	.007
-12	.750	.989	.891	.859	.755	.734	.040	.555	5	4	.010	.045/.035	.011
-16	1.000	1.265	1.142	1.109	1.005	.984	.040	.579	5	4	.010	.045/.035	.014
-20	1.250	1.515	1.392	1.359	1.256	1.235	.040	.579	5	4	.010	.045/.035	.017
-24	1.500	1.785	1.642	1.600	1.506	1.480	.040	.685	6	5	.010	.045/.035	.023
-28	1.750	2.035	1.892	1.850	1.756	1.730	.040	.685	6	5	.010	.045/.035	.027
-32	2.000	2.308	2.145	2.100	2.006	1.980	.060	.685	6	5	.010	.045/.035	.033
-36	2.250	2.558	2.395	2.350	2.257	2.220	.060	.692	6	5	.010	.045/.035	.037
-40	2.500	2.808	2.645	2.600	2.507	2.485	.060	.692	6	5	.010	.065/.055	.041
-44	2.750	3.058	2.895	2.850	2.757	2.715	.060	.692	6	5	.010	.065/.055	.045
-48	3.000	3.308	3.145	3.100	3.007	2.965	.060	.692	6	5	.010	.065/.055	.049
-56	3.500	3.820	3.645	3.600	3.509	3.467	.060	.722	6	5	.016	.065/.055	.057
-64	4.000	4.329	4.154	4.110	4.009	3.975	.060	.722	6	5	.016	.065/.055	.069
-72	4.500	4.830	4.655	4.610	4.509	4.475	.060	.770	7	6	.024	.090/.080	.080
-80	5.000	5.330	5.155	5.110	5.009	4.975	.075	.966	9	8	.024	.090/.080	.109
-88	5.500	5.830	5.655	5.610	5.511	5.475	.075	.966	9	8	.024	.090/.080	.119