

REV.
A

AS33515

RATIONALE

FEDERAL SUPPLY CLASS
4730

THIS STANDARD IS REVISED TO UPDATE THE DIMENSIONS IN TABLES FOR CLARITY.

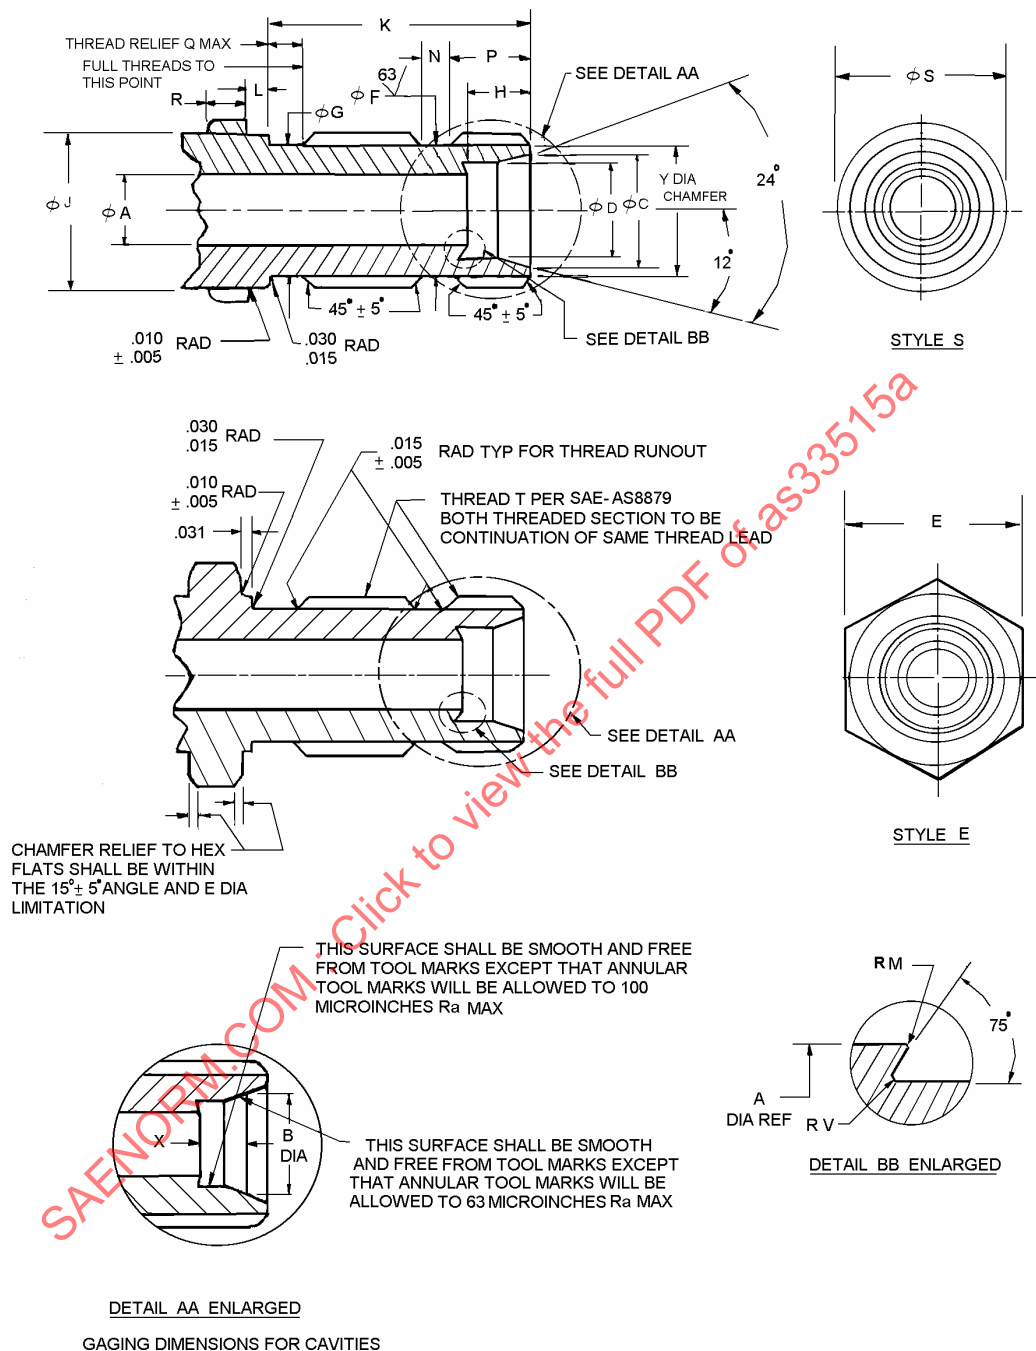


FIGURE 1 - STYLE E AND S

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: NONE

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
(R) FITTING END, STANDARD DIMENSIONS
FOR BULKHEAD
FLARELESS TUBE CONNECTIONS

AS33515
SHEET 1 OF 3

**REV.
A**

TABLE 1 - DIMENSIONS DATA (A TO J)

SIZE NO.	TUBE OD	THREAD T AS8879	A ±.003	B ±.0001 GAGE	C REF	D +.004 -.000	E	F +.000 -.003 /9/	G +.000 -.005	H ±.003	J	
											MAX	MIN
2	.125	.3125-24 UNJF-3A	.093	.163	.189	.135	.563	.250	.245	.188	.3125	.3053
3	.188	.3750-24 UNJF-3A	.125	.234	.267	.196	.625	.312	.307	.234	.3750	.3678
4	.250	.4375-20 UNJF-3A	.187	.293	.319	.261	.688	.364	.359	.234	.4375	.4294
5	.313	.5000-20 UNJF-3A	.234	.356	.382	.324	.750	.426	.421	.250	.5000	.4919
6	.375	.5625-18 UNJF-3A	.297	.416	.441	.386	.813	.481	.476	.250	.5625	.5538
8	.500	.7500-16 UNJF-3A	.422	.560	.601	.514	1.000	.660	.654	.305	.7500	.7406
10	.625	.8750-14 UNJF-3A	.500	.686	.727	.641	1.125	.773	.767	.350	.8750	.8647
12	.750	1.0625-12 UNJ-3A	.656	.810	.852	.766	1.375	.945	.938	.350	1.0625	1.0511
16	1.000	1.3125-12 UNJ-3A	.875	1.062	1.102	1.016	1.625	1.195	1.188	.415	1.3125	1.3011
20	1.250	1.6250-12 UNJ-3A	1.093	1.316	1.355	1.270	1.875	1.507	1.501	.415	1.6250	1.6136
24	1.500	1.8750-12 UNJ-3A	1.344	1.565	1.604	1.520	2.125	1.756	1.750	.485	1.8750	1.8636
32	2.000	2.5000-12 UNJ-3A	1.813	2.068	2.108	2.022	2.750	2.381	2.375	.485	2.5000	2.4886

TABLE 1 - DIMENSIONS DATA (K TO Y)

SIZE NO.	TUBE OD	K	L	M MAX RAD	N +.010 −.000	P ±.005	Q MAX	R ±.030	S ±.031 DIA	V RAD		W MAX	X ±.005	Y ±.010
										MAX	MIN			
2	.125	.828	.094	.005	.125	.290	.078	.110	.438	.010	.005	.005	.128	.250
3	.188	.875			.131	.340			.500	.158	.310			
4	.250	.938			.140	.355	.090	.120	.562	.015	.010		.174	.365
5	.313								.625				.190	.425
6	.375	.984	.125	.010	.156	.365	.098	.140	.688	.015	.010	.005	.193	.480
8	.500	1.125			.187	.445	.109	.160	.875				.210	.660
10	.625	1.266			.219	.495	.122	.170	1.000				.255	.775
12	.750	1.375			.015	.234	.545	.140	.190				.1187	.025
16	1.000			.1438						.322	1.195			
20	1.250			.1750						.325	1.505			
24	1.500			.2000						.390	1.755			
32	2.000	1.578							2.625				.395	2.380

NOTES:

1. CONCENTRICITY: D, C, AND T (PITCH DIAMETER) SHALL BE CONCENTRIC TO EACH OTHER WITHIN .008 TOTAL INDICATOR READING (TIR). F AND T (PITCH DIAMETER) SHALL BE CONCENTRIC TO EACH OTHER WITHIN .005 TIR.
2. THREAD AND FACE OF HEX SHALL BE SQUARE WITHIN W WHEN MEASURED AT DIAMETER E.
3. SURFACE ROUGHNESS SHALL BE IN ACCORDANCE WITH ASME B46.1.
4. ON STYLE S FITTING END, THE L DIMENSION PROVIDES FOR A WASHER TO FORM BACKING FACE AGAINST BULKHEAD AND A .031 INCH LAND FOR POSITIONING IN BULKHEAD. ON STYLE E FITTING END NO WASHER IS REQUIRED.
5. CERTAIN PROVISIONS (SCREW THREADS, HEXAGON SIZE AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STANDARD 25/6. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES IF REQUIRED.