

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS39029/79

FEDERAL SUPPLY CLASS
5999

RATIONALE

AS39029/79A HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

NOTICE

THE REQUIREMENTS FOR PROCURING THE CONTACTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF: SAE AS39029


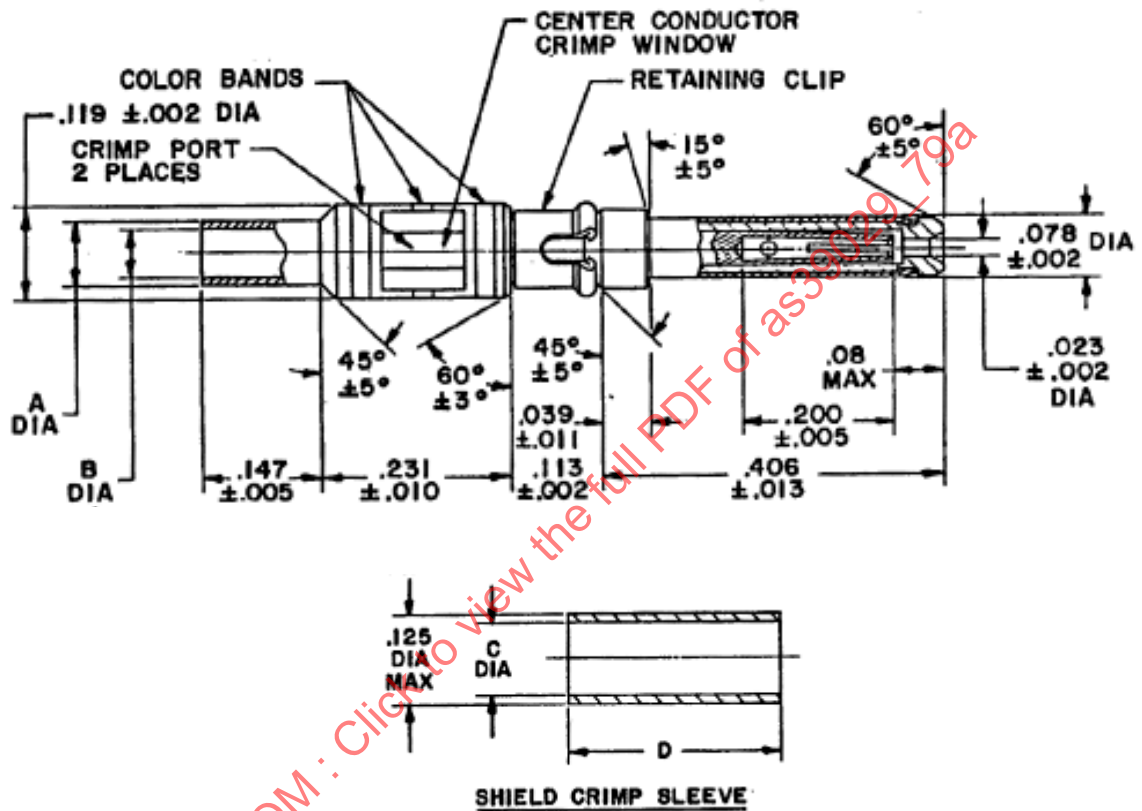


FIGURE 1 - AS39029/79 SHIELDED PIN CONTACT

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS39029/79A>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS39029



AEROSPACE STANDARD

(R) CONTACTS, ELECTRICAL CONNECTOR, PIN,
CRIMP REMOVABLE, SHIELDED
(FOR MIL-DTL-28748/9 CONNECTORS)

AS39029/79
SHEET 1 OF 4

REV.
A

Copyright 2014 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2000-07 REVISED 2009-09 REAFFIRMED 2014-11

TABLE 1 - CONTACT DIMENSIONS

BIN CODE	A ± .002 (.05)	B ± .002 (.05)	C ± .0010 (.025)	D ± .005 (.13)
436	.087 (2.21)	.070 (1.78)	.1065 (2.750)	.305 (7.75)
437	.087 (2.21)	.045 (1.14)	.1035 (2.629)	.250 (6.35)

TABLE 2 - MARKING AND DESIGN CHARACTERISTICS

BIN CODE	COLOR BANDS			CABLE ACCOMMODATED	CONTACT CAVITY SIZE	TYPE	CLASS
	1 ST	2 ND	3 RD				
436	YELLOW	ORANGE	BLUE	M17/094-RG179 M17/113-RG316	16	D	A
437	YELLOW	ORANGE	VIOLET	M17/093-RG178	16	D	A

TABLE 3 - TOOL REQUIREMENTS

BIN CODE	CONTACT CRIMPING TOOL	CABLE ACCOMMODATION	INSTALLING TOOL	REMOVAL TOOL
436	<u>1/</u>	M17/094-RG179 M17/113-RG316	M81969/17-04	<u>2/</u>
437	<u>1/</u>	M17/093-RG178	M81969/17-04	<u>2/</u>

1/ USE DANIELS MANUFACTURING COMPANY TOOL HX3-530, ASTRO TOOL COMPANY TOOL AL115 OR EQUIVALENT, TOOL CRIMPS BOTH INNER AND OUTER CONTACTS SIMULTANEOUSLY.

2/ DANIELS MANUFACTURING COMPANY TOOL DRK597, ASTRO TOOL COMPANY TOOL ATH 2101 OR EQUIVALENT

TABLE 4 - PART NUMBERS

AS39029 PART NUMBER	BIN CODE	SUPERSEDES PART NUMBER(S)
M39029/79-436	436	M39029/79-16A
M39029/79-437	437	M39029/79-16B

TABLE 5 - PERFORMANCE REQUIREMENTS

TENSILE STRENGTH (POUNDS)		CONTACT ENGAGING AND SEPARATION FORCES (oz)				CONTACT RESISTANCE (MILLIVOLTS)				CABLE USED
INNER CONTACT	OUTER CONTACT	INNER CONTACT	CONTACT ASSEMBLY 1/	25 °C + 3 °C		85 °C + 3 °C – 0 °C				
				INNER CONTACT	OUTER CONTACT	INNER CONTACT	OUTER CONTACT			
				4.0 MIN	10 MIN	.4 MIN	7.0 MAX	1.5 MIN	20.0 MAX	
						12.0 MAX		24.0 MAX		RG316 RG179

1/ WHEN MATED WITH AS39029/80 CONTACT

	AEROSPACE STANDARD	AS39029/79 SHEET 2 OF 4	REV. A
	(R) CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, SHIELDED (FOR MIL-DTL-28748/9 CONNECTORS)		

REQUIREMENTS:

1. DESIGN:
CONTACT SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE 1, TABLE 1 AND 2. DIMENSIONS ARE IN INCHES AND SHOWN AFTER PLATING. UNLESS OTHERWISE SPECIFIED, SPHERICAL END DIMENSIONS SHALL CONFORM TO AS39029. ALL DIMENSIONS IN PARENTHESES ARE METRIC EQUIVALENTS AND PROVIDED FOR GENERAL INFORMATION ONLY (SEE AS39029 SECTION 6.0).
2. TOOLS:
TOOLS REQUIRED FOR CRIMPING CONTACTS TO WIRE/CABLE AND THE INSTALLING/REMOVAL FROM THE CONNECTOR SHALL BE IN ACCORDANCE WITH TABLE 3.
3. PART NUMBERS:
CONTACT PART NUMBERS SHALL BE IN ACCORDANCE WITH TABLE 4. SUPERSEDING PART NUMBERS ARE AS SPECIFIED.
4. MATERIALS:
MATERIALS SHALL BE IN ACCORDANCE WITH AS39029.
5. MECHANICAL:
MECHANICAL PROPERTIES SHALL BE IN ACCORDANCE WITH AS39029.

THE CONTACT SEPARATION AND ENGAGEMENT FORCES SHALL MEET THE REQUIREMENTS OF TABLE 5.

THE TENSILE STRENGTH SHALL MEET THE REQUIREMENTS OF TABLE 5.

AXIAL CONCENTRICITY OF ALL DIAMETERS, PRIOR TO CRIMPING, SHALL BE CONCENTRIC WITHIN 0.004 INCHES (0.10 mm) TIR. AXIAL CONCENTRICITY OF ALL DIAMETERS, AFTER CRIMPING, SHALL BE CONCENTRIC WITHIN 0.009 (0.23 mm) TIR.
6. ELECTRICAL:
ELECTRICAL PROPERTIES SHALL BE IN ACCORDANCE WITH AS39029.

CONTACT RESISTANCE AT A LOAD CURRENT OF 1.0 AMPERE SHALL MEET THE REQUIREMENTS OF TABLE 5.

DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 750 VOLTS, AC-RMS AT SEA LEVEL.

INSULATION RESISTANCE SHALL BE TESTED AT 25 +3, -0 °C AND 85 +3, -0 °C.

LOW SIGNAL CONTACT RESISTANCE IS ON THE INNER CONTACT ONLY. THE INITIAL RESISTANCE SHALL BE 100 MILLIOHMS. THE AFTER CONDITIONED RESISTANCE SHALL 125 MILLIOHMS.
7. ENVIRONMENTAL:
ENVIRONMENTAL PROPERTIES SHALL BE IN ACCORDANCE WITH AS39029.

VIBRATION TEST SHALL BE TEST CONDITION II

SHOCK TEST SHALL BE TEST CONDITION I
8. ASSEMBLY INSTRUCTIONS:
MANUFACTURER'S RECOMMENDED ASSEMBLY INSTRUCTIONS SHALL BE SHIPPED WITH EACH UNIT PACKAGE.
9. QUALIFICATION REQUIREMENTS:
CONNECTOR FIXTURES SHALL BE MIL-DTL-28748.

TEN ADDITIONAL CONTACT SAMPLES, OF EACH SIZE, SHALL BE SUBJECTED TO THE CONTACT RETENTION TEST AS SPECIFIED IN MIL-DTL-28748 FOR QUALIFICATION AND GROUP B INSPECTION.

QUALIFICATION OF ONE DASH NUMBER (i.e. -436) QUALIFIES ALL DASH NUMBERS PROVIDED DIMENSIONS FROM MANUFACTURER'S CONTROL DRAWINGS ARE SUPPLIED ON ALL CONTACTS BEING QUALIFIED BY SIMILARITY.

	AEROSPACE STANDARD	AS39029/79 SHEET 3 OF 4	REV. A
	(R) CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, SHIELDED (FOR MIL-DTL-28748/9 CONNECTORS)		