

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS85049/5

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/5B, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/5B, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as85049-5

THIRD ANGLE PROJECTION



ISSUED 2000-04

PREPARED BY SAE SUBCOMMITTEE AE-8C1


SAE The Engineering Society
For Advancing Mobility
INTERNATIONAL
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE
SEALING, STRAIGHT, STEP-DOWN, CATEGORY 1A
(FOR MIL-C-22992 CONNECTORS, CLASSES C, J, AND R)

AS85049/5
SHEET 1 OF 15

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: MIL-C-85049.

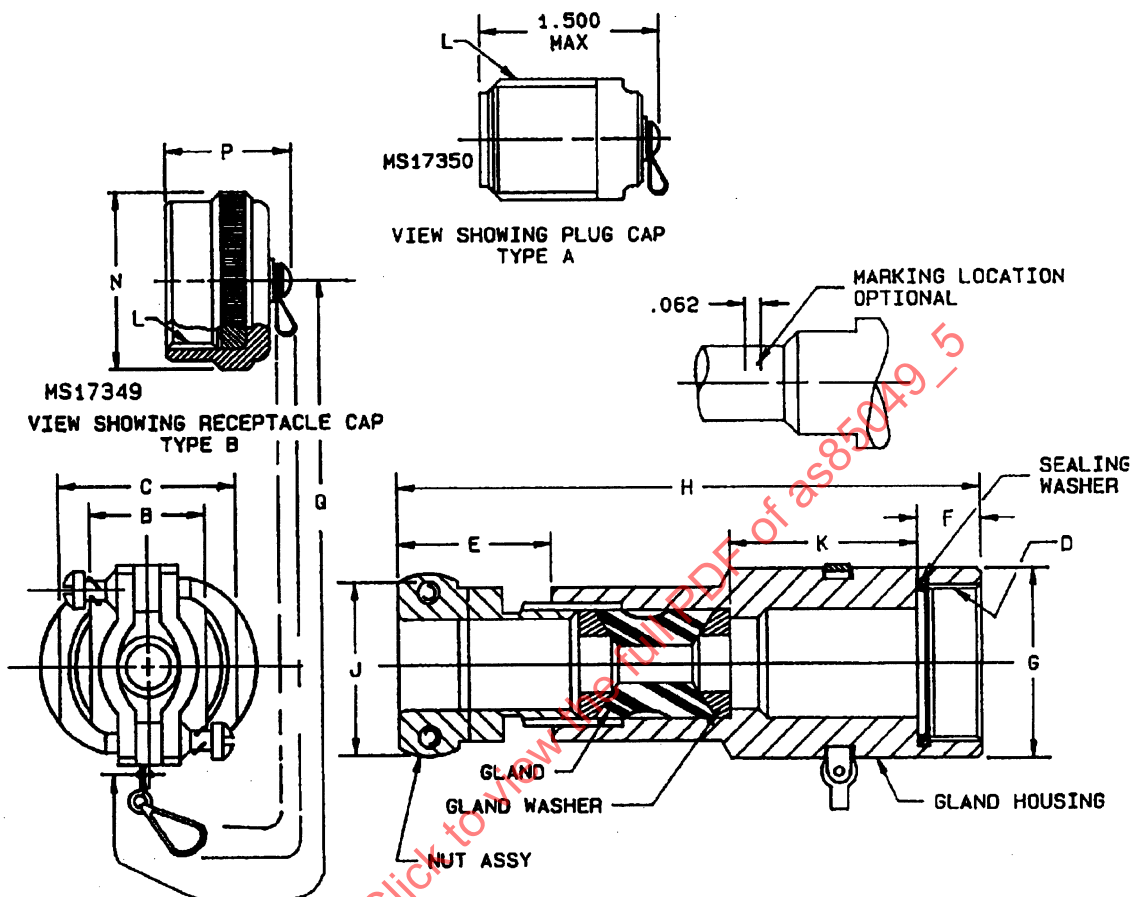

CONFIGURATION A. STYLE 1 CABLE SEALING.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS.

Size number	Shell size	Cable range		B		C	D thread class 2B-LH	E free length max	F	G dia +.010 -.020
		Min dia	Max dia	+.000 -.010	+.000 -.010					
1	12	.156	.250	.625	.812	.7500-20 UNEF	.906	.479	.938	
2	18	.281	.375	.750	1.125	1.1250-18 NEF	.969	.479	1.312	
3	18	.281	.375	.875	1.125	1.1250-18 NEF	.969	.479	1.312	
4	18	.188	.281	.750	1.125	1.1250-18 NEF	.969	.479	1.312	
5	18	.511	.605	1.000	1.125	1.1250-18 NEF	1.062	.479	1.312	
6	18	.436	.530	1.000	1.125	1.1250-18 NEF	1.062	.479	1.312	
7	20	.605	.699	1.062	1.250	1.2500-18 NEF	1.062	.479	1.438	
8	20	.361	.455	1.062	1.250	1.2500-18 NEF	1.062	.479	1.438	
9	20	.511	.605	1.000	1.250	1.2500-18 NEF	1.062	.479	1.438	
10	22	.449	.562	1.188	1.406	1.3750-18 NEF	1.094	.479	1.562	
11	22	.311	.405	1.000	1.375	1.3750-18 NEF	1.062	.479	1.562	
12	22	.715	.828	1.188	1.406	1.3750-18 NEF	1.094	.479	1.562	
13	24	.787	.900	1.312	1.625	1.6250-18 NEF	1.094	.479	1.812	
14	24	.517	.630	1.312	1.625	1.6250-18 NEF	1.094	.479	1.812	
15	24	.637	.750	1.312	1.625	1.6250-18 NEF	1.094	.479	1.812	
16	24	.857	.970	1.312	1.625	1.6250-18 NEF	1.094	.479	1.812	
17	24	.715	.828	1.188	1.625	1.6250-18 NEF	1.094	.479	1.812	
18	24	.692	.805	1.312	1.625	1.6250-18 NEF	1.094	.479	1.812	
19	28	.755	.880	1.546	1.875	1.8750-16 UN	1.281	.479	2.062	
20	28	.984	1.109	1.546	1.875	1.8750-16 UN	1.281	.479	2.062	
21	28	.637	.750	1.312	1.875	1.8750-16 UN	1.094	.479	2.062	
22	28	.281	.375	0.875	1.875	1.8750-16 UN	0.969	.479	2.062	
23	28	.857	.970	1.312	1.875	1.8750-16 UN	1.094	.479	2.062	
24	28	.875	1.000	1.546	1.875	1.8750-16 UN	1.281	.479	2.062	
25	28	.436	.530	1.000	1.812	1.8750-16 UN	1.062	.479	2.062	
26	28	.567	.680	1.312	1.875	1.8750-16 UN	1.094	.479	2.062	
27	32	.930	1.055	1.546	2.062	2.0625-16 N	1.281	.479	2.312	
28	32	1.150	1.230	1.780	2.062	2.0625-16 N	1.281	.479	2.312	
29	32	.637	.750	1.312	2.062	2.0625-16 N	1.094	.479	2.312	
30	32	.755	.880	1.546	2.062	2.0625-16 N	1.281	.479	2.312	
31	32	.984	1.109	1.546	2.062	2.0625-16 N	1.281	.479	2.312	
32	32	.857	.970	1.312	2.062	2.0625-16 N	1.094	.479	2.312	
33	32	.281	.375	.875	2.062	2.0625-16 N	.969	.479	2.312	
34	32	.436	.530	1.000	2.000	2.0625-16 N	1.062	.479	2.312	
35	32	1.005	1.130	1.780	2.062	2.0625-16 N	1.281	.479	2.312	
36	36	1.185	1.310	1.780	2.312	2.3125-16 N	1.281	.479	2.562	
37	36	.984	1.109	1.546	2.312	2.3125-16 N	1.281	.479	2.562	
38	36	1.250	1.375	2.000	2.312	2.3125-16 N	1.281	.479	2.562	
39	36	1.055	1.180	1.780	2.312	2.3125-16 N	1.281	.479	2.562	
40	36	1.320	1.445	2.000	2.312	2.3125-16 N	1.281	.479	2.562	
41	36	.857	.970	1.312	2.250	2.3125-16 N	1.094	.479	2.562	
42	36	1.105	1.230	1.780	2.312	2.3125-16 N	1.281	.479	2.562	
43	40	1.815	1.940	2.438	2.750	2.6250-16 UN	1.391	.667	2.875	
44	40	1.700	1.825	2.438	2.750	2.6250-16 UN	1.391	.667	2.875	
45	40	1.605	1.730	2.438	2.750	2.6250-16 UN	1.391	.667	2.875	
46	40	1.531	1.656	2.250	2.750	2.6250-16 UN	1.281	.667	2.875	
47	44	1.867	2.000	2.750	2.969	2.8750-16 UN	1.382	.667	3.125	
48	44	1.775	1.900	2.438	2.812	2.8750-16 UN	1.382	.667	3.125	

CONFIGURATION 1A. STYLE 1 CABLE SEALING - CONTINUED.

FIGURE 1. CONFIGURATION AND DIMENSIONS - CONTINUED.

Size number	Shell size	H max	J +.031	K +.015 -.025	L thread (plated) class 2 (A or B)	N dia max	P max	Q within one link
1	12	3.182	0.938	.563	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	18	3.901	1.062	1.157	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
3	18	3.932	1.125	1.125	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
4	18	3.901	1.062	1.157	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
5	18	4.177	1.375	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
6	18	4.177	1.375	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
7	20	4.489	1.562	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
8	20	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.562	.980	5.00
9	20	4.306	1.375	1.250	1.2500-0.1P-0.2L-DS	1.562	.980	5.00
10	22	4.584	1.688	1.343	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
11	22	4.306	1.375	1.250	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
12	22	4.306	1.375	1.250	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
13	24	4.647	1.812	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
14	24	4.647	1.812	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
15	24	4.647	1.812	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
16	24	4.647	1.812	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
17	24	4.542	1.688	1.301	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
18	24	4.647	1.812	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
19	28	4.896	2.125	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
20	28	4.896	2.125	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
21	28	4.647	1.812	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
22	28	4.229	1.125	1.422	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
23	28	4.647	1.812	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
24	28	4.896	2.125	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
25	28	4.431	1.375	1.375	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
26	28	4.647	1.812	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
27	32	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
28	32	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
29	32	4.647	1.812	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
30	32	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
31	32	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
32	32	4.647	1.812	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
33	32	4.276	1.125	1.469	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
34	32	4.431	1.375	1.375	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
35	32	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
36	36	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
37	36	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
38	36	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
39	36	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
40	36	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
41	36	4.651	1.812	1.375	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
42	36	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.179	.980	6.00
43	40	6.354	3.171	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
44	40	6.354	3.171	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
45	40	6.354	3.171	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
46	40	6.057	2.953	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
47	44	6.345	3.375	2.156	3.0000-0.1P-0.2L-DS	3.217	.980	6.00
48	44	5.266	3.171	1.078	3.0000-0.1P-0.2L-DS	3.217	.980	6.00

CONFIGURATION 1A. STYLE 1 CABLE SEALING - CONTINUED.

FIGURE 1. CONFIGURATION AND DIMENSIONS - CONTINUED.

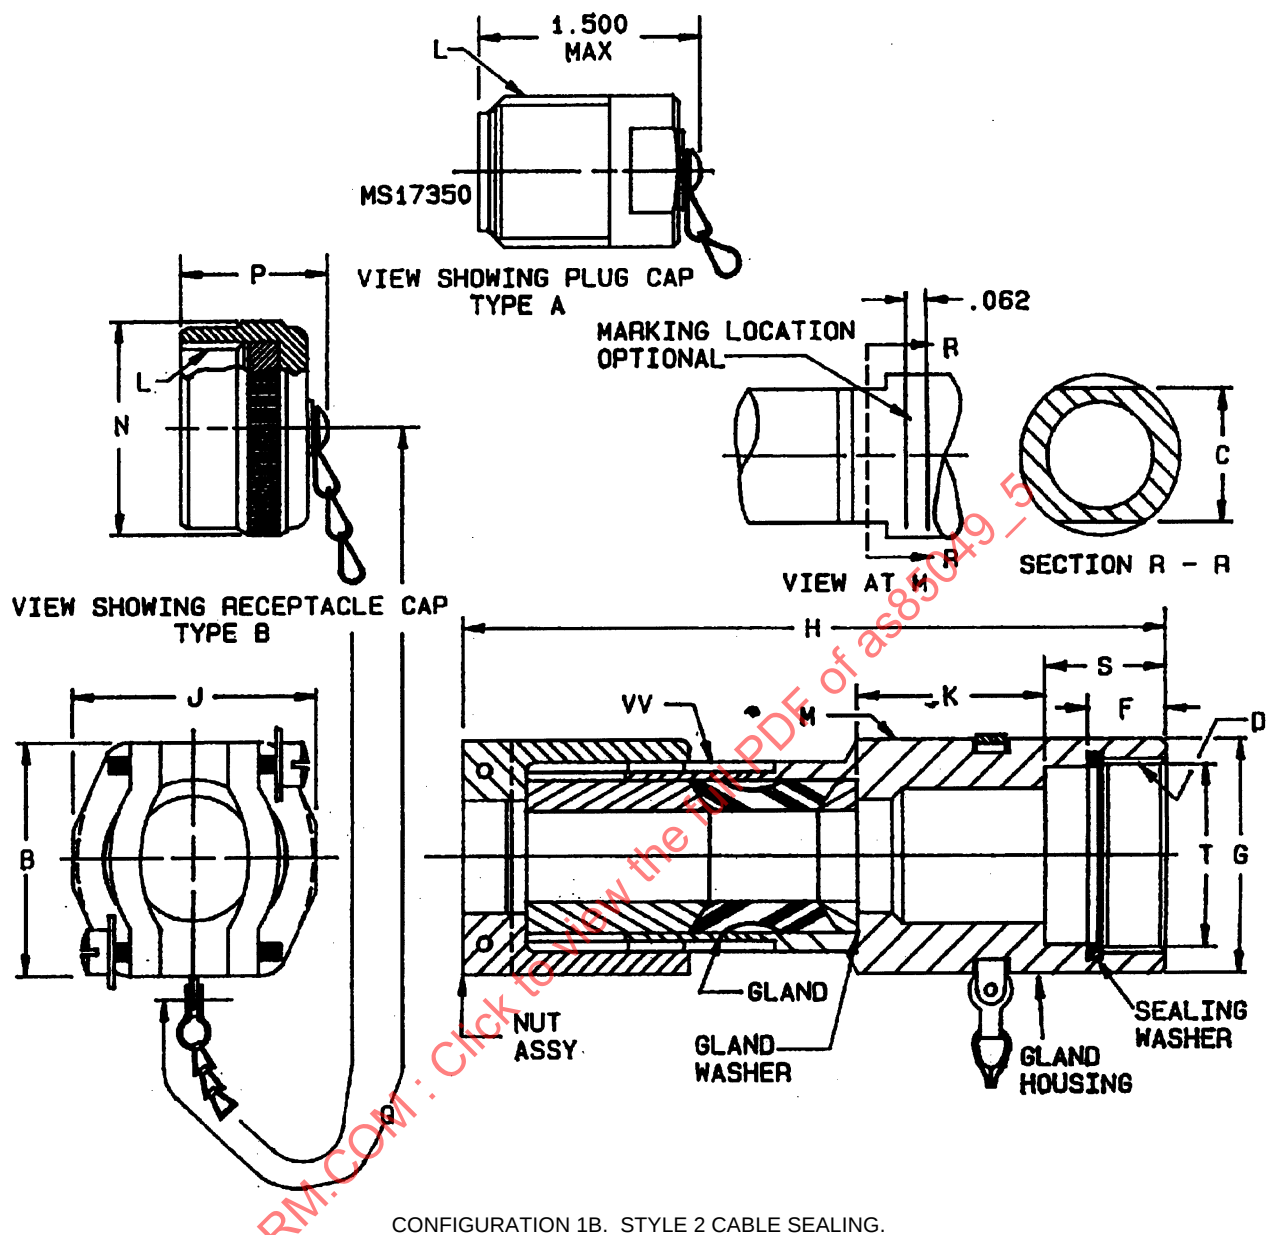


FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size number	Shell size	Cable range		B	C	D	F	G	H	J
		Min dia	Max dia	+ .005	+ .000 - .010	thread class 2B-LH	+ .016	dia + .010 - .020	max	max
1	12	.130	.280	.969	.812	.7500-20 UNEF	.479	.938	4.000	1.100
2	14	.246	.396	1.094	.938	.8750-20 UNEF	.479	1.062	4.100	1.110
3	16	.321	.521	1.219	1.062	1.0000-20 UNEF	.479	1.188	4.400	1.320
4	18	.446	.646	1.344	1.125	1.1250-18 UNEF	.479	1.312	4.600	1.420
5	18	.300	.475	1.344	1.125	1.0000-20 UNEF	.479	1.312	4.600	1.420
6	20	.565	.765	1.469	1.250	1.3750-18 UNEF	.479	1.438	4.900	1.600
7	20	.400	.600	1.469	1.250	1.6250-18 NEF	.479	1.438	4.900	1.600
8	22	.690	.890	1.625	1.375	1.6250-18 NEF	.479	1.562	4.900	1.750
9	22	.500	.700	1.625	1.375	1.6250-18 NEF	.479	1.562	4.900	1.750
10	22	.400	.525	1.625	1.375	1.3750-18 NEF	.479	1.562	4.900	1.750
11	24	.815	1.015	1.750	1.625	1.6250-18 NEF	.479	1.812	5.000	1.900
12	24	.595	.815	1.750	1.625	1.6250-18 NEF	.479	1.812	5.000	1.900
13	28	.980	1.180	2.000	1.875	1.6250-18 NEF	.479	2.062	5.300	2.190
14	28	.780	.980	2.000	1.875	1.6250-18 UN	.479	2.062	5.300	2.190
15	32	1.230	1.430	2.250	2.062	2.0625-16 N	.479	2.062	5.600	2.475
16	32	1.030	1.230	2.250	2.062	2.0625-16 N	.479	2.062	5.600	2.475
17	36	1.470	1.670	2.500	2.312	2.3125-16 N	.479	2.562	5.600	2.715
18	36	1.270	1.470	2.500	2.312	2.3125-16 N	.479	2.562	5.600	2.715
19	40	1.660	1.860	2.750	2.562	2.6250-16 UN	.667	2.875	5.725	2.900
20	40	1.400	1.660	2.750	2.562	2.6250-16 UN	.667	2.875	5.725	2.900


CONFIGURATION 1B. STYLE 2 CABLE SEALING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size number	Shell size	K ±.010	L thread class 2A/B	N dia max	P max	Q within one link	S ±.010	T dia ±.055	VV gland threads plated class 2-LH
1	12	.950	.8750-0.1P-0.2L-DS	1.094	.765	5.00	1.425	.600	.8125-20 UNEF
2	14	1.075	1.0000-0.1P-0.2L-DS	1.219	.765	5.00	1.425	.726	.9375-20 UNEF
3	16	1.200	1.1250-0.1P-0.2P-DS	1.344	.980	5.00	1.605	.845	1.0625-18 NEF
4	18	1.325	1.1250-0.1P-0.2L-DS	1.469	.980	5.00	1.605	.970	1.1875-18 NEF
5	18	1.325	1.1250-0.1P-0.2L-DS	1.469	.980	5.00	1.605	.970	1.1875-18 NEF
6	20	1.325	1.3750-0.1P-0.2L-DS	1.562	.980	5.00	1.605	1.095	1.3125-18 NEF
7	20	1.325	1.3750-0.1P-0.2L-DS	1.562	.980	5.00	1.605	1.095	1.3125-18 NEF
8	22	1.325	1.5000-0.1P-0.2L-DS	1.688	.980	6.00	1.605	1.220	1.4375-18 NEF
9	22	1.325	1.5000-0.1P-0.2L-DS	1.688	.980	6.00	1.605	1.220	1.4375-18 NEF
10	22	1.325	1.5000-0.1P-0.2L-DS	1.688	.980	6.00	1.605	1.220	1.4375-18 NEF
11	24	1.450	1.5000-0.1P-0.2L-DS	1.938	.980	6.00	1.605	1.470	1.5625-18 NEF
12	24	1.450	1.5000-0.1P-0.2L-DS	1.938	.980	6.00	1.605	1.470	1.5625-18 NEF
13	28	1.700	2.0000-0.1P-0.2L-DS	2.219	.980	6.00	1.605	1.713	1.8125-16 N
14	28	1.700	2.0000-0.1P-0.2L-DS	2.219	.980	6.00	1.605	1.713	1.8125-16 N
15	32	1.950	2.2500-0.1P-0.2L-DS	2.469	.980	6.00	1.605	1.900	2.0625-16 N
16	32	1.950	2.2500-0.1P-0.2L-DS	2.469	.980	6.00	1.605	1.900	2.0625-16 N
17	36	1.950	2.2500-0.1P-0.2L-DS	2.719	.980	6.00	1.605	2.150	2.3125-16 N
18	36	1.950	2.2500-0.1P-0.2L-DS	2.719	.980	6.00	1.605	2.150	2.3125-16 N
19	40	1.950	2.7500-0.1P-0.2L-DS	2.969	.980	6.00	1.605	2.460	2.5000-16 UN
20	40	1.950	2.7500-0.1P-0.2L-DS	2.969	.980	6.00	1.605	2.460	2.5005-16 UN

CONFIGURATION 1B. STYLE 2 CABLE SEALING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

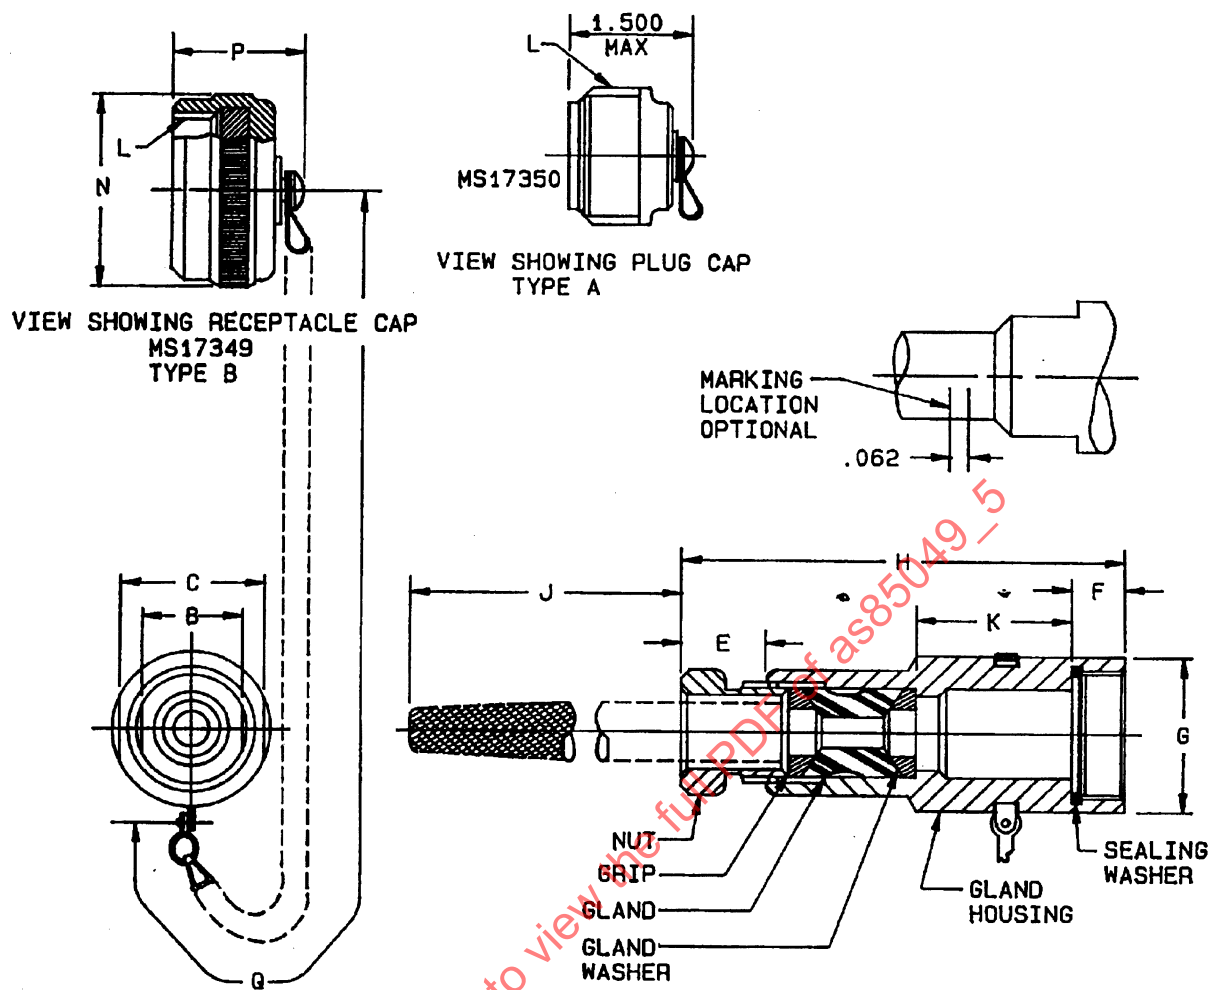

CONFIGURATION J.C. STYLE 3 CABLE SEALING AND GRIPPING.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size number	Shell size	Cable range		B +.000 -.010	C +.000 -.010	D thread class 2B-LH	E free length max	F +.016	G dia +.010 -.020
		Min dia	Max dia						
1	12	.160	.222	.625	.812	.7500-20 UNEF	.476	.479	.938
2	18	.511	.605	1.000	1.125	1.1250-18 UNEF	.597	.479	1.312
3	18	.436	.530	1.000	1.125	1.1250-18 UNEF	.597	.479	1.312
4	18	.306	.375	.875	1.125	1.1250-18 UNEF	.539	.479	1.312
5	18	.219	.281	.750	1.125	1.1250-18 UNEF	.539	.479	1.312
6	20	.605	.699	1.062	1.250	1.2500-18 UNEF	.597	.479	1.438
7	20	.511	.605	1.000	1.250	1.2500-18 UNEF	.597	.479	1.438
8	20	.361	.455	1.062	1.250	1.2500-18 UNEF	.597	.479	1.438
9	22	.715	.828	1.125	1.460	1.3750-18 UNEF	.597	.479	1.562
10	22	.449	.562	1.125	1.460	1.3750-18 UNEF	.597	.479	1.562
11	22	.316	.405	1.000	1.375	1.3750-18 UNEF	.597	.479	1.562
12	24	.692	.805	1.250	1.625	1.6250-18 UNEF	.597	.479	1.812
13	24	.637	.750	1.250	1.625	1.6250-18 UNEF	.597	.479	1.812
14	24	.517	.630	1.250	1.625	1.6250-18 UNEF	.597	.479	1.812
15	28	.984	1.109	1.500	1.875	1.8750-16 UNEF	.597	.479	2.062
16	28	.875	1.000	1.500	1.875	1.8750-16 UNEF	.597	.479	2.062
17	28	.755	.880	1.500	1.875	1.8750-16 UNEF	.597	.479	2.062
18	28	.637	.750	1.250	1.875	1.8750-16 UNEF	.597	.479	2.062
19	28	.567	.680	1.250	1.875	1.8750-16 UNEF	.597	.479	2.062
20	28	.436	.530	1.000	1.812	1.8750-16 UNEF	.597	.479	2.062
21	28	.306	.375	.875	1.875	1.8750-16 UNEF	.539	.479	2.062

CONFIGURATION 1C. STYLE 3 CABLE SEALING AND GRIPPING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size number	Shell size	H max	J $\pm .031$	K $+ .015$ $- .025$	L thread (plated) class 2 (A or B)	N dia max	P max	Q within one link
1	12	2.752	2.406	.563	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	18	3.712	5.188	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
3	18	3.712	4.688	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
4	18	3.502	3.844	1.125	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
5	18	3.471	2.844	1.157	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
6	20	4.024	6.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
7	20	3.841	5.188	1.250	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
8	20	4.024	4.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
9	22	4.087	6.688	1.343	1.5000-0.1P-0.2L-DS	1.688	.980	5.00
10	22	4.087	5.188	1.343	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
11	22	3.841	3.688	1.250	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
12	24	4.150	6.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
13	24	4.150	6.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
14	24	4.150	5.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
15	28	4.212	7.688	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
16	28	4.212	7.188	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
17	28	4.212	6.688	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
18	28	4.150	6.688	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
19	28	4.150	6.688	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
20	28	3.966	4.688	1.375	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
21	28	3.799	3.844	1.422	2.0000-0.1P-0.2L-DS	2.219	.980	6.00

CONFIGURATION 1C: STYLE 3 CABLE SEALING AND GRIPPING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size number	Shell size	Cable range		B +.000 -.010	C +.000 -.010	D thread class 2B-LH	E free length max	F +.016	G dia +.010 -.020
		Min dia	Max dia						
22	32	1.105	1.230	1.750	2.062	2.0625-16 UN	.597	.479	2.312
23	32	1.005	1.130	1.750	2.062	2.0625-16 UN	.597	.479	2.312
24	32	.930	1.055	1.500	2.062	2.0625-16 UN	.597	.479	2.312
25	32	.857	.970	1.250	2.062	2.0625-16 UN	.597	.479	2.312
26	32	.755	.880	1.500	2.062	2.0625-16 UN	.597	.479	2.312
27	32	.637	.750	1.250	2.062	2.0625-16 UN	.597	.479	2.312
28	32	.436	.530	1.000	2.000	2.0625-16 UN	.597	.479	2.312
29	32	.306	.375	.875	2.062	2.0625-16 UN	.597	.479	2.312
30	36	1.320	1.445	2.000	2.312	2.3125-16 UN	.597	.479	2.562
31	36	1.250	1.375	2.000	2.312	2.3125-16 UN	.597	.479	2.562
32	36	1.185	1.310	1.750	2.312	2.3125-16 UN	.597	.479	2.562
33	36	1.105	1.230	1.750	2.312	2.3125-16 UN	.597	.479	2.562
34	36	1.055	1.180	1.750	2.312	2.3125-16 UN	.597	.479	2.562
35	36	.984	1.109	1.500	2.312	2.3125-16 UN	.597	.479	2.562
36	36	.857	.970	1.250	2.250	2.3125-16 UN	.597	.479	2.562
37	40	1.815	1.940	2.438	2.750	2.6250-16 UN	.710	.667	2.875
38	40	1.700	1.825	2.438	2.750	2.6250-16 UN	.710	.667	2.875
39	40	1.605	1.730	2.438	2.750	2.6250-16 UN	.710	.667	2.875
40	40	1.531	1.656	2.250	2.750	2.6250-16 UN	.597	.667	2.875
41	44	1.867	2.000	2.750	2.969	2.8750-16 UN	.710	.667	3.125
42	44	1.775	1.900	2.438	2.812	2.8750-16 UN	.710	.667	3.125

CONFIGURATION 1C. STYLE 3 CABLE SEALING AND GRIPPING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size number	Shell size	H max	J $\pm .031$	K $+ .015$ $- .025$	L thread (plated) class 2 (A or B)	N dia max	P max	Q within one link
22	32	4.275	8.188	1.372	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
23	32	4.275	7.188	1.372	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
24	32	4.212	7.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
25	32	4.150	7.188	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
26	32	4.212	6.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
27	32	4.150	6.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
28	32	3.966	4.688	1.375	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
29	32	3.846	3.844	1.469	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
30	36	4.337	9.688	1.371	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
31	36	4.337	9.688	1.371	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
32	36	4.275	8.688	1.372	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
33	36	4.275	8.188	1.372	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
34	36	4.275	8.188	1.372	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
35	36	4.212	7.688	1.371	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
36	36	4.154	7.188	1.375	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
37	40	5.673	13.188	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
38	40	5.673	13.188	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
39	40	5.673	13.188	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
40	40	5.373	12.688	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
41	44	5.673	14.188	2.156	3.0000-0.1P-0.2L-DS	3.217	.980	6.00
42	44	4.594	13.688	1.078	3.0000-0.1P-0.2L-DS	3.217	.980	6.00

CONFIGURATION 1C. STYLE 3 CABLE SEALING AND GRIPPING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.