

**REV.
B**

AS85421/5

FEDERAL SUPPLY CLASS
4730

RATIONALE

THIS DOCUMENT IS REVISED TO INCLUDE PRI-QPL REQUIREMENTS AND REFORMATTED TO BE IN ACCORDANCE WITH SAE GUIDELINES.


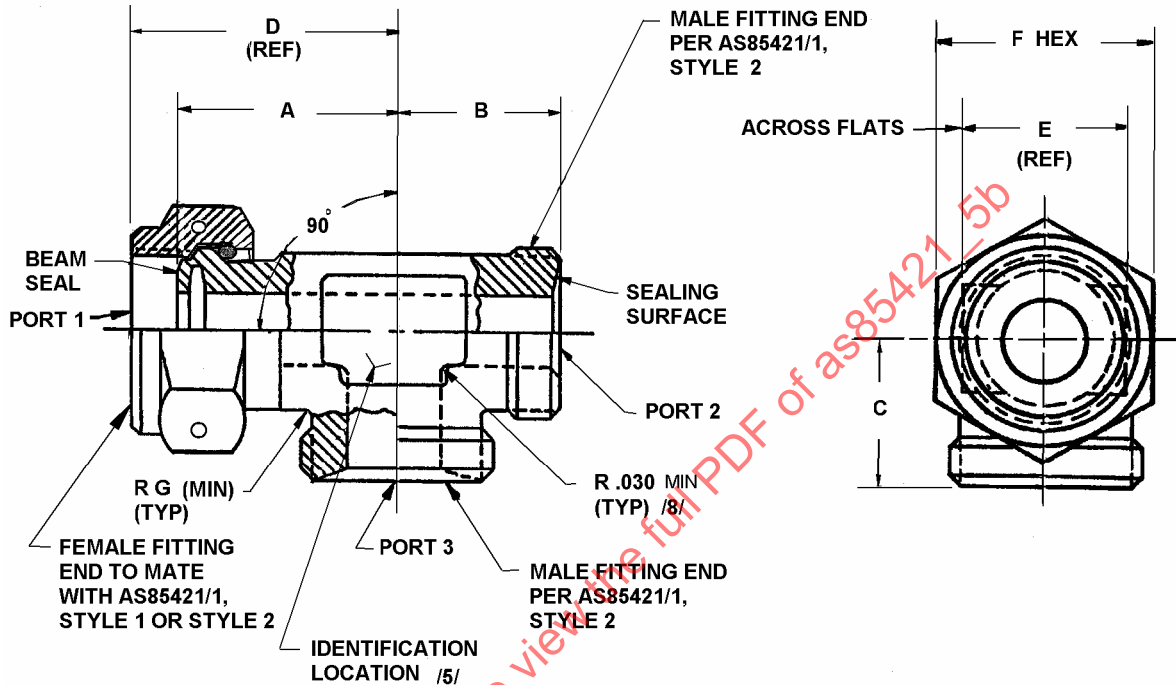


FIGURE 1

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3

PROCUREMENT SPECIFICATION: AS85421 /4/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) FITTING, TEE, REDUCER AND NON-REDUCER,
BEAM SEAL, 3000/4000 PSI, MALE ON RUN AND,
BRANCH, SWIVEL NUT ON RUN

AS85421/5
SHEET 1 OF 3

**REV.
B**

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2002-01 REVISED 2006-08

TABLE 1 - DIMENSIONAL DATA

PORT (1)	PORT (2)	PORT (3)	A	B	C	D (REF)	E (REF)	F		G RAD (MIN)	WT LB (MAX)	
								MIN	MAX		TI	CRES
04	04	04	.808	.684	.684	1.014	.500	.558	.565	.042	.035	.061
04	06	06	.808	.704	.704	1.014	.500	.558	.565	.042	.052	.091
06	04	04	.945	.684	.684	1.178	.500	.684	.692	.042	.061	.107
06	04	06	.945	.684	.704	1.178	.500	.684	.692	.042	.063	.110
06	08	04	.945	.704	.684	1.178	.500	.684	.692	.042	.066	.117
06	06	06	.945	.704	.704	1.178	.500	.684	.692	.042	.060	.106
08	06	08	1.045	.811	.824	1.294	.562	.871	.878	.070	.105	.185
08	08	08	1.045	.824	.824	1.294	.562	.871	.878	.070	.060	.159
10	06	06	1.178	.878	.878	1.485	.688	.996	1.003	.070	.131	.232

NOTES:

/1/ MATERIAL:

- a. CODE LETTER P - TYPE 17-4PH CORROSION RESISTANT STEEL PER AMS 5643.
- b. CODE LETTER T - TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS 4928 OR AMS 4965.
- c. CODE LETTER V - TYPE 15-5PH, CORROSION RESISTANT STEEL PER AMS 5659.

2. HEAT TREATMENT:

- a. MATERIAL CODE LETTER P - CONDITION H1075 PER AMS 2759/3.
- b. MATERIAL CODE LETTER T - NONE.
- c. MATERIAL CODE LETTER V - AGE TO CONDITION H 1075 PER AMS-H-6875 OR AMS 2759/3.

3. FINISH:

- a. MATERIAL CODE LETTER P - PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- b. MATERIAL CODE LETTER T - NONE.
- c. MATERIAL CODE LETTER V - PASSIVATE PER AMS-QQ-P-35 TYPE VI OR VII.

/4/ PROCUREMENT SPECIFICATION: AS85421 EXCEPT AS SPECIFIED ON THIS STANDARD. THIS PRODUCT SHALL BE QUALIFIED IN ACCORDANCE WITH SPECIFICATION AS85421. USERS OF THIS STANDARD SHALL PROCURE THE PRODUCT FROM ACCREDITED MANUFACTURER(S), OR ACCREDITED DISTRIBUTOR(S), AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST (QPL) PRI-QPL-AS85421 FOR THIS STANDARD. SEE <http://www.pri.sae.org/QPL-AS85421/> FOR CURRENT QPL ON LINE.

/5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D, OR METHOD 7A3, 15A3, OR 15B.

- a. FOR SIZES 06 AND SMALLER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTERS "AS" AND MATERIAL CODE LETTER, AND FORGING MANUFACTURER'S IDENTIFICATION WHEN MADE FROM FORGING.
- b. FOR SIZES 08 AND LARGER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER AND MATERIAL CODE LETTER, AND FORGING MANUFACTURER'S IDENTIFICATION WHEN MADE FROM FORGING.