


REV. B	FEDERAL SUPPLY CLASS 5306		
AS9208	RATIONALE THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY. THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9208, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.		
WARNING THIS DOCUMENT INCLUDES CADMIUM AS A PLATING MATERIAL. THE USE OF CADMIUM HAS BEEN RESTRICTED AND/OR BANNED FOR USE IN MANY COUNTRIES DUE TO ENVIRONMENTAL AND HEALTH CONCERNS. THE USER SHOULD CONSULT WITH LOCAL OFFICIALS ON APPLICABLE HEALTH AND ENVIRONMENTAL REGULATIONS REGARDING ITS USE.			
SAENORM.COM : Click to view the full PDF of as9208			
CUSTODIAN: SAE E-25			
 SAE Aerospace An SAE International Group	AEROSPACE STANDARD BOLT, MACHINE - STEEL, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, UNS K14675, 195 KSI MIN, .1900-32 UNJF-3A	AS9208 SHEET 1 OF 4	REV. B
Copyright 2007 SAE International All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE. TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Tel: 724-776-4970 (outside USA) Email: CustomerService@sae.org SAE WEB ADDRESS: http://www.sae.org ISSUED 2000-08 REVISED 2003-11 REAFFIRMED 2007-06			



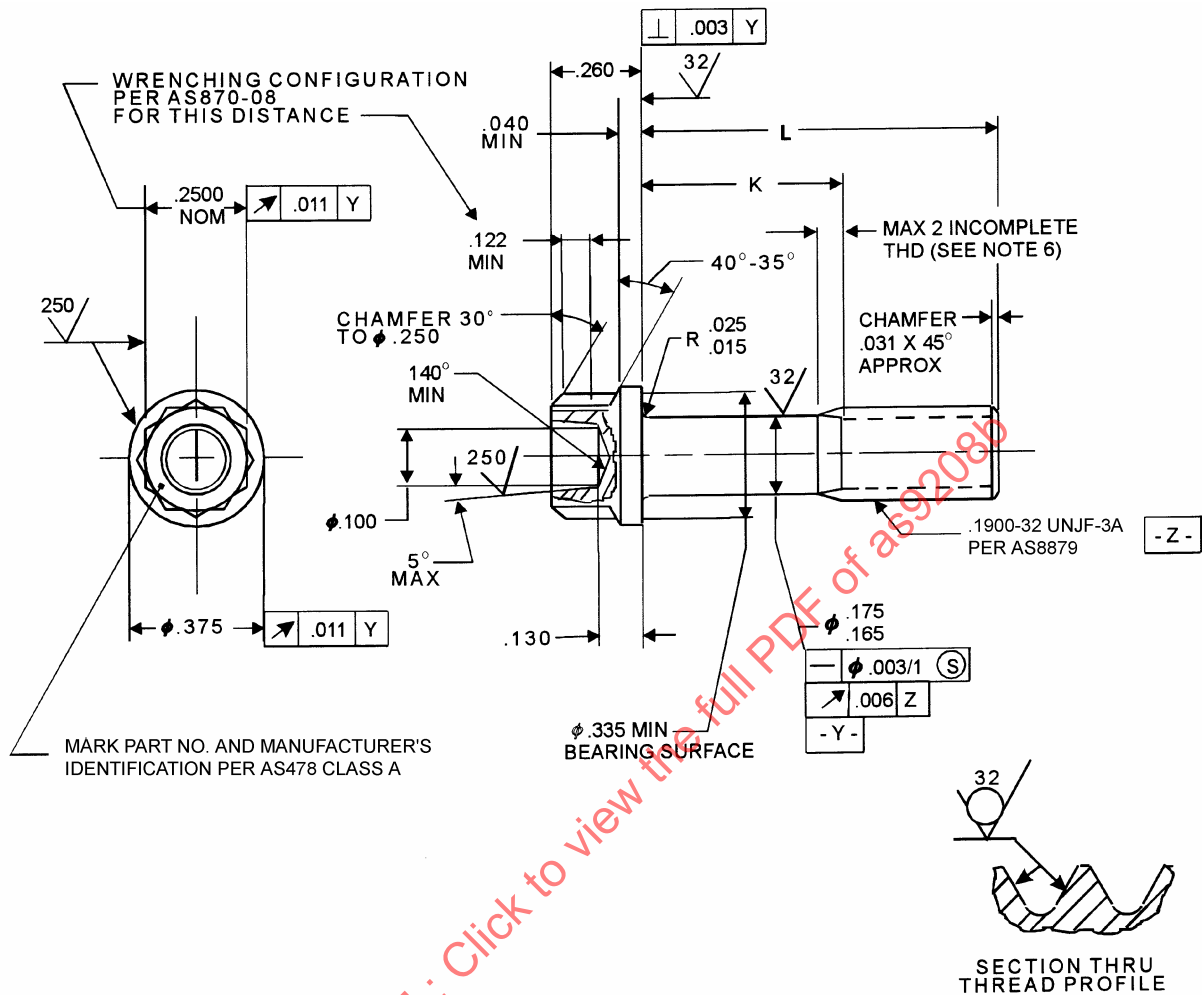


FIGURE 1 - BOLT

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX. MASS LB/100	PART NO.	L	K	APPROX. MASS LB/100
MS9208-04	.375	.072 - .092	.91	MS9208-22	1.500	.810 - .870	1.63
MS9208-05	.438	.072 - .092	.95	MS9208-23	1.562	.872 - .932	1.67
MS9208-06	.500	.072 - .092	.99	MS9208-24	1.625	.935 - .995	1.71
MS9208-07	.562	.072 - .092	1.03	MS9208-25	1.688	.998 - 1.058	1.75
MS9208-08	.625	.072 - .092	1.07	MS9208-26	1.750	1.060 - 1.120	1.79
MS9208-09	.688	.072 - .092	1.11	MS9208-27	1.875	1.185 - 1.245	1.87
MS9208-10	.750	.072 - .099	1.15	MS9208-28	2.000	1.310 - 1.370	1.95
MS9208-11	.812	.122 - .182	1.19	MS9208-29	2.125	1.435 - 1.495	2.03
MS9208-12	.875	.185 - .245	1.23	MS9208-30	2.250	1.560 - 1.620	2.11
MS9208-13	.938	.248 - .308	1.27	MS9208-31	2.375	1.685 - 1.745	2.19
MS9208-14	1.000	.310 - .370	1.31	MS9208-32	2.500	1.810 - 1.870	2.27
MS9208-15	1.062	.372 - .432	1.35	MS9208-33	2.625	1.935 - 1.995	2.35
MS9208-16	1.125	.435 - .495	1.39	MS9208-34	2.750	2.060 - 2.120	2.43
MS9208-17	1.188	.498 - .558	1.43	MS9208-35	2.875	2.185 - 2.245	2.51
MS9208-18	1.250	.560 - .620	1.47	MS9208-36	3.000	2.310 - 2.370	2.59
MS9208-19	1.312	.622 - .682	1.51				
MS9208-20	1.375	.685 - .745	1.55				
MS9208-21	1.438	.748 - .808	1.59				

NOTES:

1. MATERIAL: LOW ALLOY STEEL AMS 6304 (UNS K14675).
2. PROCUREMENT SPECIFICATION: AS7459.
3. HARDNESS: 42-46 HRC.
4. FINISH: DIFFUSED NICKEL-CADMIUM PLATE AMS 2416. DIMENSIONS ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
5. MAGNETIC PARTICLE INSPECTION PER ASTM E 1444 BEFORE PLATING.
6. INCOMPLETE THREADS NOT TO ENTER FILLET.
7. SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M. REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra EXCEPT UPSET HEAD.
8. BREAK SHARP EDGES .003-.015, UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982 (ASME PUBLICATION).
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± 0.010 , ANGULAR DIMENSIONS $\pm 5^\circ$.
11. DO NOT USE UNASSIGNED PART NUMBERS.