

A Product of the
Cooperative Engineering Program

SAE J384 APR86

**Motor Vehicle Seat
Belt Anchorages —
Test Procedure**

SAE Recommended Practice
Reaffirmed April 1986

**S. A. E.
LIBRARY**

Submitted for Recognition as
an American National Standard



SAE GLOBAL MOBILITY DATABASE

*This standard is indexed
in the Standards Search Database*

SAENORM.COM : Click to view the full PDF of j384_198604

No part of this publication may be reproduced in any form,
in an electronic retrieval system or otherwise, without the
prior written permission of the publisher.

Copyright 1986 Society of Automotive Engineers, Inc.

RATIONALE:

SAE J787b has been discontinued and replaced by this report, SAE J383, and SAE J385.

RELATIONSHIP OF SAE STANDARD TO ISO STANDARD:

Not applicable.

REFERENCE SECTION:

SAE J383, Motor Vehicle Seat Belt Anchorages--Design Recommendations

SAE J385, Motor Vehicle Seat Belt Anchorages--Performance Requirements

SAE J787, Motor Vehicle Seat Belt Anchorage

SAE J850, Barrier Collision Tests

SAE J879, Motor Vehicle Seating Systems

SAE J963, Anthropomorphic Test Device for Use in Dynamic Testing of Motor Vehicles

APPLICATION:

This SAE Recommended Practice outlines both dynamic and static test procedures of seat belt anchorages attached to vehicle structure or seat assemblies installed in the vehicle.

COMMITTEE COMPOSITION:

DEVELOPED BY THE RESTRAINT SYSTEMS SUBCOMMITTEE:

R. A. Strasser, Ford Motor Company, Dearborn, MI - Chairman
J. J. Cantalupo, Ann Arbor, MI - Vice Chairman
L. L. Baker, Brighton, MI
D. M. Blaisdell, Severy, Inc., El Segundo, CA
R. Brocklehurst, B. L. Technology Ltd., England
R. F. Chandler, Federal Aviation Administration, Oklahoma City, OK
C. G. Dewey, Alliance of American Insurers, Schaumburg, IL
R. Gulette, Irvin Industries, Inc., Rochester, MI
H. L. Hanson, American Motors Corp., Southfield, MI
G. M. Hespeler, Daimler-Benz A.G., Montvale, NJ
H. G. Johannessen, Omni-Safe, Inc., Rochester, MI
W. A. Kohn, American Safety Equip. Corp., Troy, MI
E. R. McKenna, Algonac, MI
R. J. Neff, Phoenix Trimming Co., Northbrook, IL
V. T. Newton, Chrysler Corporation, Detroit, MI
J. L. Pearson, General Motors Corp., Warren, MI
F. D. Pepe, U.S. Testing Co., Inc., Hoboken, NJ
K. R. Rosendahl, Chrysler Corporation, Highland Park, MI
H. G. Rouleau, Chrysler Corporation, Detroit, MI
L. W. Schneider, University of Michigan, Ann Arbor, MI

COMMITTEE COMPOSITION (Cont'd.):

D. M. Severy, Severy, Inc., El Segundo, CA
G. Smith, Bloomfield Hills, MI
W. E. Smith, Nat'l. Hwy. Traffic Saf. Admin., Washington, DC
R. G. Snyder, Univ. of Michigan, Ann Arbor, MI
H. S. Willson, Dexter, MI
G. Wize, General Motors Corporation, Warren, MI

SPONSORED BY THE SAE BODY ENGINEERING COMMITTEE:

E. G. Zipp, Chrysler Corp., Detroit, MI - Chairman
D. W. Ableson, General Motors Corporation, Pontiac, MI - Sponsor
D. G. Anticuar, Chrysler Corporation, Detroit, MI
J. J. Cantalupo, Ford Motor Company, Dearborn, MI
J. A. Colenso, Ford Motor Co., Dearborn, MI
E. A. Crilley, Ford Motor Co., Dearborn, MI
D. K. Haenchen, Volkswagen of America, Inc., Troy, MI
D. J. Helder, Donnelly Corporation, Holland, MI
H. Kopico, Plymouth, MI
H. H. Maruyama, Chrysler Corp., Detroit, MI
C. J. McLachlan, Ford Motor Co., Dearborn, MI
W. M. Miller, Navistar Int'l. Corp., Ft. Wayne, IN
R. L. Morrison, Ford Motor Co., Detroit, MI
J. C. Paschal, Ford Motor Co., Dearborn, MI
J. R. Repp, Grosse Ile, MI
R. A. Strasser, Ford Motor Company, Dearborn, MI

SAENORM.COM : Click to view the full PDF of j384 - 198604

MOTOR VEHICLE SEAT BELT ANCHORAGES--TEST PROCEDURE

1. **SCOPE:** This SAE Recommended Practice outlines both dynamic and static test procedures of seat belt anchorages attached to vehicle structure or seat assemblies installed in the vehicle. (This SAE Recommended Practice supersedes the Test Procedure Section of SAE J787b.) Design Recommendations and Performance Requirements are specified in the Recommended Practices SAE J383, Motor Vehicle Seat Belt Anchorages--Design Recommendations and SAE J385, Motor Vehicle Seat Belt Anchorages--Performance Requirements, respectively.
2. **DEFINITIONS:**
 - 2.1 **Anchorage:** The final point of attachment for transferring seat belt assembly loads to the vehicle structure.
 - 2.2 **Attachment Hardware:** Any or all hardware (or the test equivalent) designed for transferring the load to the vehicle anchorage(s).
 - 2.3 **Dynamic Test:** A test of anchorages through application of forces at onset rates which result from a barrier impact or equivalent sled simulation.
 - 2.4 **Static Test:** A test in which loads are applied to the anchorage(s) at a rate less than the dynamic test through the use of hydraulic, pneumatic, etc. power.
3. **DYNAMIC TESTING:**
 - 3.1 **Test Equipment:**
 - 3.1.1 **Barrier:** Constructed in accordance with SAE J850, or equivalent, or:

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

3.1.2 Impact Simulator: A device for accelerating, decelerating, or a combination of decelerating and accelerating a vehicle (or simulated vehicle structure) and instrumentation for measuring pertinent data. The acceleration pulse represents the pulse obtained during the barrier crash as outlined in SAE J850.

3.1.3 Vehicle (or Simulated Vehicle Structure): The vehicle or significant portion(s) of the vehicle containing the anchorage to be tested. The manufacturer may include any vehicle components normally provided and likely to contribute to the rigidity of the vehicle structure.

3.1.4 Occupant Simulation: An anthropometric 50th percentile dummy as referenced in SAE J963, or equivalent, used to impart the inertial loads and load distribution to the anchorages during dynamic conditions.

3.2 Test Procedure:

3.2.1 Mount the vehicle (or simulated vehicle structure) on the impact simulator or prepare the vehicle for a barrier impact--SAE J850. Install occupant simulations belted in each occupant seating position to be tested. Lap and/or shoulder belts are to be installed per the vehicle manufacturers' recommendation(s).

Adjustable seats are to be in their rearmost position with the seat back in its normal design driving or riding position.

3.2.2 Adjust the operation variables of the Impact Simulator to obtain the desired barrier impact pulse.

4. STATIC TESTING:

4.1 Test Equipment:

4.1.1 Vehicle (or Simulated Vehicle Structure): See paragraph 3.1.3.

4.1.2 Test Machine: A test fixture to rigidly mount the vehicle (or simulated vehicle structure). A source of power (hydraulic, pneumatic, etc.) to apply a specific static load to the anchorage(s) and instrumentation for measuring pertinent data.

4.1.3 Test Attachments: Connecting mechanisms, such as cables, body blocks, belt attaching devices used to transmit load to the anchorages under test.

4.2 Test Procedure:

4.2.1 The vehicle (or simulated vehicle structure) is rigidly mounted to the Test Machine in a manner such as not to effect the strength characteristics of the anchorage(s).

4.2.2 Attachments are connected between the test machine and anchorage(s) to be tested as below:

- (a) Attachment hardware is positioned to simulate its location in the vehicle.
- (b) Common anchorages for each laterally adjacent seating position shall be tested simultaneously.
- (c) The body block simulation cable will be pulled at an angle of 10 ± 5 deg above the horizontal in the direction shown in Fig. 1.
- (d) For belt anchorages integral to the seat assembly, seat inertia force (see Fig. 1) is to be applied simultaneously with belt anchorage loads (as referenced in J879).
- (e) Body Blocks--see Fig. 2.

4.2.3 Magnitudes of anchorage loads are specified in paragraph 4 of SAE J385.

SAENORM.COM : Click to view the full PDF of J384 - 198604

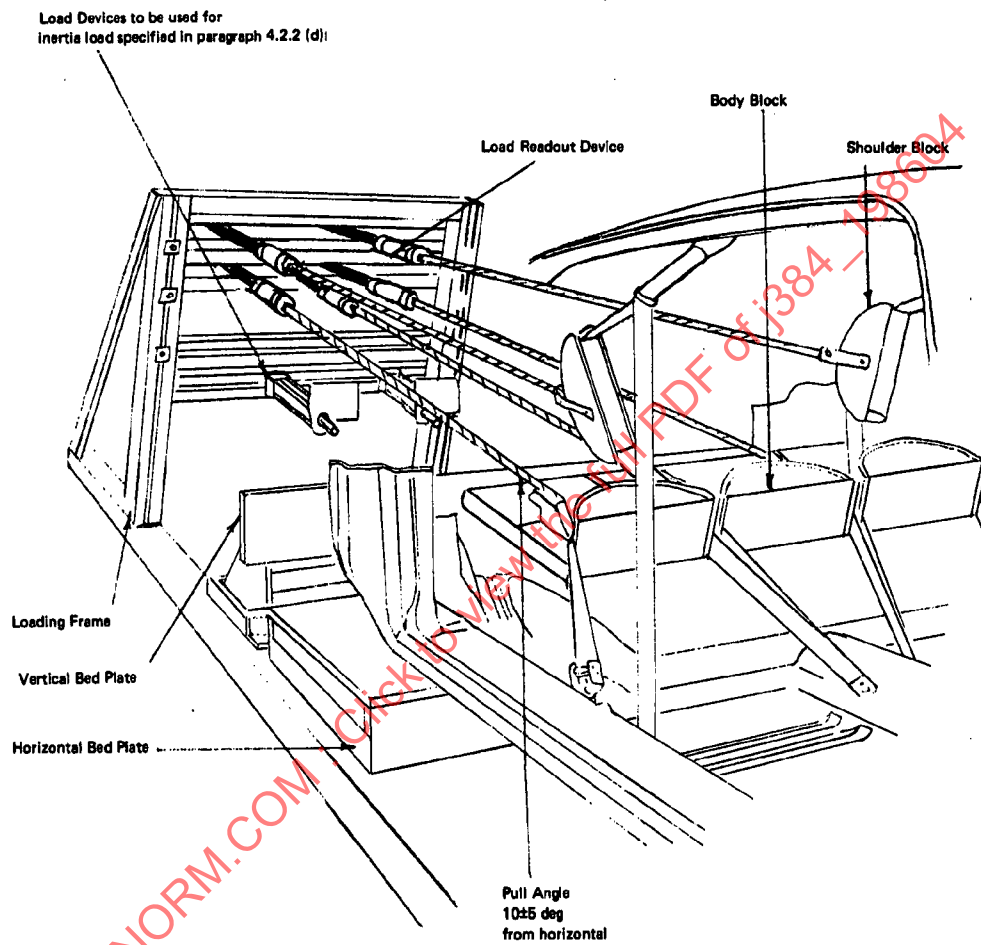


FIG. 1--TYPICAL STATIC TEST FIXTURE