



ULC Standards  
Normes ULC



JOINT CANADA – UNITED  
STATES NATIONAL STANDARD

# ANSI/CAN/UL/ULC 2586A:2024

## STANDARD FOR SAFETY

Hose Nozzle Valves for Gasoline and  
Gasoline/Ethanol Blends with Nominal  
Ethanol Concentrations up to 85  
Percent (E0 – E85)



ANSI/UL 2586A-2024

scc  ccn

## **SCC FOREWORD**

### **National Standard of Canada**

A National Standard of Canada is a standard developed by a Standards Council of Canada (SCC) accredited Standards Development Organization, in compliance with requirements and guidance set out by SCC. More information on National Standards of Canada can be found at [www.scc.ca](http://www.scc.ca).

SCC is a Crown corporation within the portfolio of Innovation, Science and Economic Development (ISED) Canada. With the goal of enhancing Canada's economic competitiveness and social well-being, SCC leads and facilitates the development and use of national and international standards. SCC also coordinates Canadian participation in standards development, and identifies strategies to advance Canadian standardization efforts.

Accreditation services are provided by SCC to various customers, including product certifiers, testing laboratories, and standards development organizations. A list of SCC programs and accredited bodies is publicly available at [www.scc.ca](http://www.scc.ca).

ULNORM.COM : Click to view the full PDF of UL 2586A 2021

UL Standard for Safety for Hose Nozzle Valves for Gasoline and Gasoline/Ethanol Blends with Nominal Ethanol Concentrations up to 85 Percent (E0 – E85), ANSI/CAN/UL/ULC 2586A

Second Edition, Dated May 31, 2024

### **Summary of Topics**

***This new Second Edition of ANSI/CAN/UL/ULC 2586A dated May 31, 2024 is being issued as a new joint US/Canada Standard reflecting the latest ANSI and SCC approval dates and incorporating the proposal dated February 9, 2024 and April 5, 2024.***

The new requirements are substantially in accordance with Proposal(s) on this subject dated February 9, 2024 and April 5, 2024.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of ULSE Inc. (ULSE).

ULSE provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will ULSE be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if ULSE or an authorized ULSE representative has been advised of the possibility of such damage. In no event shall ULSE's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold ULSE harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 2586A 2024



ANSI/UL 2586A-2024

MAY 31, 2024



1

ANSI/CAN/UL/ULC 2586A:2024

**Standard for Hose Nozzle Valves for Gasoline and Gasoline/Ethanol Blends  
with Nominal Ethanol Concentrations up to 85 Percent (E0 – E85)**

Prior to the first edition, the requirements for the products covered by this standard were included in the Outline of Investigation for Hose Nozzle Valves for Gasoline and Gasoline/Ethanol Blends with Nominal Ethanol Concentrations up to 85 Percent (E0 – E85), UL 2586A.

First Edition – February, 2015

**Second Edition**

**May 31, 2024**

This ANSI/CAN/UL/ULC Safety Standard consists of the Second Edition.

The most recent designation of ANSI/UL 2586A as an American National Standard (ANSI) occurred on May 31, 2024. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, Title Page, Preface or SCC Foreword.

This standard has been designated as a National Standard of Canada (NSC) on May 31, 2024.

COPYRIGHT © 2024 ULSE INC.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 2586A 2024

## CONTENTS

Preface .....	5
---------------	---

## INTRODUCTION

1 Scope .....	7
2 Components .....	8
3 Units of Measurement .....	8
4 Referenced publications .....	9
5 Glossary .....	10

## CONSTRUCTION

6 Assembly .....	11
6.1 General .....	11
6.2 Hose nozzle valves .....	11
7 Materials .....	12
7.1 Metallic materials .....	12
7.2 Nonmetallic materials .....	15
7.3 Casting impregnation materials .....	17
7.4 Internal parts .....	17
7.5 Blending options .....	17
8 Bodies and Covers .....	18
9 Diaphragms .....	20
10 Springs .....	20
11 Operating Mechanisms .....	20

## PERFORMANCE

12 General .....	20
13 Deformation Test .....	21
14 Long Term Exposure Test .....	22
14.1 General .....	22
14.2 Samples .....	22
14.3 Method .....	23
14.4 Results .....	23
15 External Leakage Test .....	24
16 Hose Nozzle Valve Guard Strength Test .....	24
17 Operation Test .....	26
17.1 Automatic hose nozzle valve .....	26
17.2 Bellows secondary shut off operation .....	26
18 Pull Test .....	26
19 Sensitivity Test .....	27
20 Endurance Test .....	27
21 Bellows Secondary Shut Off Operation Test .....	28
22 Visible Discharge Indicator Tests .....	28
22.1 Thermal shock test .....	28
22.2 Drop test .....	28
23 Hydrostatic Strength Test .....	28
24 Electrical Continuity Test .....	29
25 Salt Spray Test .....	29
26 Moist Ammonia-Air Stress Cracking Test .....	29
27 Marking Adhesion Test .....	30

28	Blending Cycling Test .....	30
----	-----------------------------	----

## **MANUFACTURING AND PRODUCTION**

29	General .....	31
----	---------------	----

## **INSTALLATION INSTRUCTIONS**

30	General .....	31
----	---------------	----

## **MARKING**

31	General .....	31
----	---------------	----

## **ANNEX A (normative) – TEST FLUIDS**

A1	Details .....	33
----	---------------	----

ULNORM.COM : Click to view the full PDF of UL 2586A 2024



## Preface

This is the Second Edition of ANSI/CAN/UL/ULC 2586A, Standard for Hose Nozzle Valves for Gasoline and Gasoline/Ethanol Blends with Nominal Ethanol Concentrations up to 85 Percent (E0 – E85).

ULSE is accredited by the American National Standards Institute (ANSI) and the Standards Council of Canada (SCC) as a Standards Development Organization (SDO). ULC Standards is accredited by the Standards Council of Canada (SCC) as a Standards Development Organization (SDO).

This Standard has been developed in compliance with the requirements of ANSI and SCC for accreditation of a Standards Development Organization.

This ANSI/CAN/UL/ULC 2586A Standard is under continuous maintenance, whereby each revision is approved in compliance with the requirements of ANSI and SCC for accreditation of a Standards Development Organization. In the event that no revisions are issued for a period of four years from the date of publication, action to revise, reaffirm, or withdraw the standard shall be initiated.

Annex [A](#), identified as Normative, forms a mandatory part of this Standard.

In Canada, there are two official languages, English and French. All safety warnings must be in French and English. Attention is drawn to the possibility that some Canadian authorities may require additional markings and/or installation instructions to be in both official languages.

This Second Edition joint American National Standard and National Standard of Canada is based on, and now supersedes, the First Edition of UL 2586A.

Requests for interpretation of this Standard should be sent to ULC Standards. The requests should be worded in such a manner as to permit a “yes” or “no” answer based on the literal text of the requirement concerned.

Comments or proposals for revisions on any part of the Standard may be submitted at any time. Proposals should be submitted via a Proposal Request in the Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

Our Standards for Safety are copyrighted by ULSE Inc. Neither a printed nor electronic copy of a Standard should be altered in any way. All of our Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of ULSE Inc.

This Edition of the Standard has been formally approved by the Technical Committee (TC) on Valves for Flammable Fluids, TC 842.

This list represents the TC 842 membership when the final text in this standard was balloted. Since that time, changes in the membership may have occurred.

### TC 842 Membership

Name	Representing	Interest Category	Region
M. Bishoff	Lorax Systems Inc	Producer	Canada
D. Boyd	BP America Inc	Commercial / Industrial User	USA
C. Deschamps	Régie du Bâtiment du Québec	Authorities Having Jurisdiction / Regulator	Canada
J. Dutton	Standards Individuals	General Interest	Canada
T. Henderson	California Water Resources Control Board	Authorities Having Jurisdiction / Regulator	USA
W. Koch	Technology Resources International, Inc.	General Interest	USA
M. Lauber	OPW Fueling Components	Producer	USA
P. Legault	Integrated Review Services – Consulting	Government	Canada
J. Meyer	Core Engineered Solutions Inc	Commercial / Industrial User	USA
L. Panchala	NCI Canada Inc. (Process and Steam Specialties)	Producer	Canada
J. Petersen	Petersen Engineering	Commercial / Industrial User	USA
J. Prusko	UL Standards & Engagement	TC Project Manager	USA
H. Silva	Franklin Electric	Producer	USA
R. Sumabat	Technical Standards & Safety Authority (TSSA)	Authorities Having Jurisdiction / Regulator	Canada
L. Werner	UL Standards & Engagement	TC Chair	Canada
B. Wiegert	PMMIC	Commercial / Industrial User	USA
E. Wolff-Klammer	UL Solutions	Testing and Standards Org	USA
J. Yager	Morrison Bros. Co.	Producer	USA

International Classification for Standards (ICS): 23.060.01, 23.100.50, 75.160.20

For information on ULSE Standards, visit <https://www.shopulstandards.com>, call toll free 1-888-853-3503 or email us at [ClientService@shopULStandards.com](mailto:ClientService@shopULStandards.com).

This Standard is intended to be used for conformity assessment.

The intended primary application of this standard is stated in its scope. It is important to note that it remains the responsibility of the user of the standard to judge its suitability for this particular application.

CETTE NORME NATIONALE DU CANADA EST DISPONIBLE EN VERSIONS FRANÇAISE ET ANGLAISE.

## INTRODUCTION

### 1 Scope

1.1 These requirements cover hose nozzle valves that are intended to be used for the control of motor fuels as indicated in 1.3. They are of the type used in motor fuel dispensing equipment. Hose nozzle valves covered by this standard are for use with motor fuels which are handled at temperatures within the range of  $-20^{\circ}\text{F}$  ( $-29^{\circ}\text{C}$ ) to  $125^{\circ}\text{F}$  ( $52^{\circ}\text{C}$ ) and an operating pressure of minimum 50 psig (345 kPa).

1.2 Hose nozzle valves for gasoline/ethanol blends with nominal ethanol concentrations up to 85 % (E0 – E85) shall be constructed to comply with the following:

- a) The requirements defined in the Standard for Hose Nozzle Valves for Flammable and Combustible Liquids, UL/ULC 2586; and
- b) The requirements in this Standard.

1.3 Hose nozzle valves covered by these requirements are intended for use with one or more of the following as applicable:

- a) Gasoline formulated in accordance with the Standard Specification for Automotive Spark-Ignition Fuel, ASTM D4814;
- b) Gasoline/ethanol blends with nominal ethanol concentrations up to 25 % ethanol (E25), consisting of gasoline formulated in accordance with the Standard Specification for Automotive Spark-Ignition Fuel, ASTM D4814, when blended with denatured fuel ethanol formulated to be consistent with the Standard Specification for Denatured Fuel Ethanol for Blending With Gasolines For Use as Automotive Spark-Ignition Engine Fuel, ASTM D4806; or
- c) Gasoline/ethanol blends with nominal ethanol concentrations above 25 % formulated in accordance with the Standard Specification in (b) or formulated in accordance with the Standard Specification for Ethanol Fuel Blends for Flexible-Fuel Automotive Spark-Ignition Engines, ASTM D5798.

1.4 These requirements cover hose nozzle valves of the manually operated and automatic type. When they form a part of an assembly which provides for additional functions or service, the requirements are outside the scope of these requirements.

1.5 These requirements do not cover the following:

- a) Hose nozzle valves for handling liquids under cryogenic conditions.
- b) Hose nozzle valves for general refinery service, offshore and pipe line terminals, natural gas processing plants, gas distribution systems, petrochemical processing facilities, or the like.
- c) Hose nozzle valves operated wholly or partially by electricity or battery.

1.6 This standard does not cover hose nozzle valves for use with diesel, biodiesel, diesel/biodiesel blends, kerosene or fuel oil, which are covered under the Standard for Hose Nozzle Valves for Diesel Fuel, Biodiesel Fuel, Diesel/Biodiesel Blends with Nominal Biodiesel Concentrations up to 20 Percent (B20), Kerosene, and Fuel Oil, UL/ULC 2586B.

1.7 This standard does not cover hose nozzle valves for use with liquefied petroleum gas (LP-Gas), which are covered under the Standard for Flow Control Valves for Anhydrous Ammonia and LP-Gas, UL/ULC 125.

1.8 Products covered by this Standard are intended to be installed and used in accordance with the applicable Codes and Regulations as determined by the Authority Having Jurisdiction (AHJ), such as but not limited to:

a) In the United States:

- 1) Flammable and Combustible Liquids Code, NFPA 30;
- 2) Code for Motor Fuel Dispensing Facilities and Repair Garages, NFPA 30A.

b) In Canada:

- 1) The National Fire Code of Canada;
- 2) Provincial or other Regulations.

1.9 Products intended to be rated for use with gasoline or gasoline/ethanol blends with nominal ethanol concentrations:

- a) Up to 25 % (E0 – E25) shall be evaluated using the CE25a test fluid as the only applicable test fluid;
- b) Up to 40 % (E0 – E40) shall be evaluated using both the CE25a and the CE40a test fluids; or
- c) Up to 85 % shall be evaluated using both the CE25a and the CE85a test fluids.

## 2 Components

2.1 Except as indicated in [2.2](#), a component of a product covered by this standard shall comply with the requirements for that component.

2.2 A component is not required to comply with a specific requirement that:

- a) Involves a feature or characteristic not required in the application of the component in the product covered by this standard; or
- b) Is superseded by a requirement in this standard.

2.3 A component shall be used in accordance with its rating established for the intended conditions of use.

2.4 Specific components are incomplete in construction features or restricted in performance capabilities. Such components are intended for use only under limited conditions, such as certain temperatures not exceeding specified limits, and shall be used only under those specific conditions.

2.5 A hose nozzle valve with an integral swivel shall be additionally evaluated to the Electrical-Continuity and Operation Tests in UL/ULC 567A. The force shall be applied at the point on the swivel farthest from the joint. When necessitated by the swivel construction, this test shall be conducted on additional samples of the swivel with the load applied on the opposite side of the plane of rotation. See UL/ULC 567A, Figures 16.1 – 16.4 for examples.

## 3 Units of Measurement

3.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

#### 4 Referenced publications

4.1 Any undated reference to a code or standard appearing in the requirements of this standard shall be interpreted as referring to the latest edition of that code or standard.

4.2 The following publications are referenced in this Standard:

ASME B1.20.1, *Pipe Threads, General Purpose, Inch*

ASTM A653/A653M, *Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process*

ASTM B117, *Standard Practice for Operating Salt Spray (Fog) Apparatus*

ASTM B858, *Standard Test Method for Ammonia Vapor Test for Determining Susceptibility to Stress Corrosion Cracking in Copper Alloys*

ASTM D4806, *Standard Specification for Denatured Fuel Ethanol for Blending with Gasolines for Use as Automotive Spark-Ignition Engine Fuel*

ASTM D4814, *Standard Specification for Automotive Spark-Ignition Engine Fuel*

ASTM D5798, *Standard Specification for Ethanol Fuel Blends for Flexible-Fuel Automotive Spark-Ignition Engines*

ASTM D7467, *Standard Specification for Diesel Fuel Oil, Biodiesel Blends (B6 – B20)*

CSA C22.2 No. 0.15, *Adhesive Labels*

NFC, *National Fire Code of Canada*

NFPA 30, *Flammable and Combustible Liquids Code*

NFPA 30A, *Code for Motor Fuel Dispensing Facilities and Repair Garages*

UL 87A, *Power-Operated Dispensing Devices for Gasoline and Gasoline/Ethanol Blends with Nominal Ethanol Concentrations up to 85 Percent (E0 – E85)*

UL/ULC 125, *Flow Control Valves for Anhydrous Ammonia and LP-Gas*

UL 157, *Gaskets and Seals*

UL/ULC 567A, *Emergency Breakaway Fittings, Swivel Connectors and Pipe-Connection Fittings for Gasoline and Gasoline/Ethanol Blends with Nominal Ethanol Concentrations up to 85 Percent (E0 – E85)*

UL 746C, *Polymeric Materials – Use in Electrical Equipment Evaluations*

UL 969, *Marking and Labeling Systems*

UL 1332, *Organic Coatings for Steel Enclosures for Outdoor Use Electrical Equipment*

UL/ULC 2586, *Hose Nozzle Valves for Flammable and Combustible Liquids*

UL/ULC 2586B, *Hose Nozzle Valves for Diesel Fuel, Biodiesel Fuel, Diesel/Biodiesel Blends with Nominal Biodiesel Concentrations up to 20 Percent (B20), Kerosene, and Fuel Oil*

## 5 Glossary

5.1 For the purpose of this standard, the following definitions apply.

5.2 **AUTHORITY HAVING JURISDICTION (AHJ)** – The governmental body responsible for the enforcement of any part of this Standard or the official or agency designated by that body to exercise such a function.

5.3 **BLENDING OPTION** – Dispensing devices may be provided with an option that blends two specific fuels into one fuel to be dispensed. This blending occurs at the dispenser level and can be in two forms:

a) **Fixed blending** – Blending at the dispenser level that blends two specific fuels into one fuel to be dispensed, and that fuel to be dispensed is fixed. For example, fixed blending includes blend options where gasoline and denatured fuel ethanol can be blended to achieve E85, which is the actual dispensed fuel.

b) **Variable blending** – Blending at the dispenser level that blends two specific fuels into the fuel to be dispensed, but the fuel to be dispensed can be any of a number of previously set points. For example, variable blending includes blend options where gasoline and E85 can be blended to achieve E40 or E60 as the actual dispensed fuel.

5.4 **GASOLINE/ETHANOL BLENDS** – Blended fuels composed of a gasoline component and an ethanol component. The numerical value corresponding to the ethanol component determines the blend rating (such as E85 for 85 % ethanol, 15 % gasoline).

5.5 **HOSE NOZZLE VALVE, AUTOMATIC** – A hose nozzle valve which is held open during the entire filling operation. It may be held open by manual force or by an integral hold-open or latching device. It incorporates a mechanism that shuts off the flow of liquid during refueling operations to prevent overflow from the fill opening when liquid reaches a predetermined point on the spout.

5.6 **HOSE NOZZLE VALVES** – A self-closing device designed to control the flow of flammable and combustible liquids at an operating pressure of minimum 50 psig (345 kPa). It is intended for use at the outlet end of a hose for dispensing flammable liquids.

5.7 **HOSE NOZZLE VALVE, MANUALLY OPERATED** – A hose nozzle valve that is manually held open during the entire filling operation and closes only upon release of the manual force.

5.8 **HOSE NOZZLE VALVE, VAPOR RECOVERY** – A system constructed to capture vapors displaced during filling operations. The vapors are not processed during the course of this activity.

a) **Assist Nozzle** – A vacuum or pump is used to draw the vapors back to the storage tank.

b) **Balance Nozzle** – Displacement of vapors from the tank being filled forces the vapor back into the storage tank.

5.9 **SEALS, DYNAMIC** – A seal that is subject to mechanical movement or other applied forces that result in movement or flexing of the seal under normal use conditions.

5.10 **SEAL, STATIC** – A seal that is not subject to mechanical movement or other applied forces other than compressing forces that are applied during installation and maintained during normal use conditions.

5.11 VACUUM SHUTOFF PORT OPENING – An opening near the tip of the spout that connects to the vacuum tube and serves to vent the cavity above the vacuum diaphragm during refueling, and when blocked by liquid causes automatic shutoff.

## CONSTRUCTION

### 6 Assembly

#### 6.1 General

6.1.1 A hose nozzle valve shall include all of the components required for its intended function and installation.

6.1.2 A seat disc shall be attached to its poppet or holder or otherwise assembled so as to prevent it from becoming dislocated under service conditions as determined by the Hose Nozzle Endurance Test, Section [20](#). The means to secure the disc shall not rely upon cement or adhesive.

6.1.3 A brazing material used for joining liquid confining parts of a valve shall have a melting point (solidus temperature) of minimum 1000 °F (538 °C).

#### 6.2 Hose nozzle valves

6.2.1 A hose nozzle valve shall be of the manually-operated or of the automatic type. A manually-operated valve requires the valve to be manually held open during the entire filling operation without the aid of hold-open devices or latches, but is capable of closing automatically. An automatic valve requires the valve to:

- a) Be manually opened, but is capable of being held open during the filling operation by a latch or other device; and
- b) Is provided with automatic closing features.

*Exception: A hose nozzle valve for use in salt water marine or boat yard environments shall be of the automatic closing type without a latch-open device.*

6.2.2 Automatic hose nozzle valves equipped with an integral hold open or latching device shall be so designed that, if left in the latched position after the flow has been stopped by means other than the automatic feature of the hose nozzle, it shall automatically unlatch when it is returned to the dispenser, See Automatic hose nozzle valve, [17.1.2](#).

NOTE: This includes hose nozzle valves that close with a no pressure/no flow mechanism, as well as interlock hose nozzles valves that unlatch when removed from a vehicle fill pipe or when hung on the dispenser.

6.2.3 A hose nozzle valve shall be of the normally closed type. It shall be self-closing upon the manual or automatic release of the operating lever.

6.2.4 A guard shall be provided to guide or protect the free end of an operating lever and to prevent opening of the valve or damage to an operating part if the valve is dropped. A guard shall be of such strength as to permit operation of the valve subsequent to its being subjected to mechanical strength tests. See the Hose Nozzle Valve Guard Strength Test, Section [16](#).

6.2.5 An operating lever shall possess the strength required to resist bending or breaking when tested in accordance with these requirements. See the Hose Nozzle Endurance Test, Section [20](#).



6.2.6 The closing action of a hose nozzle valve shall be in the direction of fluid flow. A seat seal or valve disc shall consist of resilient material and shall provide proper seating of a disc.

6.2.7 A hose nozzle valve shall be equipped with a spout not exceeding 12 in (305 mm) in length. Nozzles shall be of corrosion resistant material, such as brass, aluminum, or stainless steel.

6.2.8 A sand casting employed as a pressure confining part of a hose nozzle valve shall have a wall thickness of minimum 0.094 in (2.39 mm).

6.2.9 The means for attaching a spout to an automatic valve body shall permit ready replacement of a spout with the use of ordinary hand tools.

6.2.10 A hose nozzle valve shall be constructed so as to provide electrical continuity from end to end across all joints so that when in use, continuity is provided for grounding of static charges. Such continuity shall be inherent in the construction and shall not be accomplished by a jumper wire. See the Electrical Continuity Test, Section [24](#).

6.2.11 A hose nozzle valve intended for use in salt water marine or boat yard environments shall be constructed so as to comply with the applicable construction and performance requirements except that the tests specified in Sections [16](#), [17](#), [19](#), [23](#), and [24](#) shall be conducted following exposure to a salt enriched atmosphere as described in [25.2](#) – [25.6](#).

*Exception: A hose nozzle valve is not required to operate in accordance with the requirements of Section [17](#) when, due to accumulation of salt in the sensing port, the hose nozzle valve does not operate to deliver fluid.*

## 7 Materials

### 7.1 Metallic materials

#### 7.1.1 General

7.1.1.1 A metallic part, in contact with the fuels anticipated by these requirements, shall be resistant to the action of the fuel if degradation of the material will result in leakage of the fuel or if it will impair the function of the device. For all fuel ratings, see Corrosion due to fluid, [7.1.2.1](#). For products rated for gasoline/ethanol blends with nominal ethanol concentrations greater than 40 %, see Metallic materials – system level, [7.1.3](#).

7.1.1.2 The exposed surfaces of metallic parts shall be resistant to atmospheric corrosion if this corrosion will lead to leakage of the fluid or if it will impair the function of the device. The material shall comply with the requirements in Atmospheric corrosion, [7.1.2.2](#). A hose nozzle valve intended for use in salt water marine or boat yard environments shall be resistant to corrosion so as to comply with the requirements of the Salt Spray Test, Section [25](#).

7.1.1.3 Metallic parts in contact with the fuels anticipated by these requirements shall not be constructed of lead, or materials that are substantially lead. In addition, no coatings or platings containing lead shall be used, such as terne plated steel.



## 7.1.2 Metallic materials – material level

### 7.1.2.1 Corrosion due to fluid

7.1.2.1.1 All metallic materials used for fluid confining parts shall be resistant to corrosion caused by the fuels anticipated by these requirements. In addition, metallic materials, used internally in fluid confining parts, that are required to operate in some manner to address safety shall be resistant to corrosion caused by these fuels. Compliance is verified by the Long Term Exposure Test, Section [14](#).

7.1.2.1.2 A coating or plating, applied to a base metal, shall be resistant to the action of the fuels anticipated by these requirements as determined by the Long Term Exposure Test, Section [14](#).

### 7.1.2.2 Atmospheric corrosion

7.1.2.2.1 Metallic materials used for fluid confining parts shall be resistant to atmospheric corrosion. In addition, metallic materials that are required to operate to address safety shall be resistant to atmospheric corrosion. Ferrous materials of a thickness specified in the following items are acceptable for the preceding when uncoated:

- a) A casting having a wall thickness of not less than 0.25 in (6.4 mm) if shown by production test to be free of leakage; and
- b) Fabricated sheet steel parts having a minimum wall thickness of 0.093 in (2.36 mm).

7.1.2.2.2 A protective coating shall provide resistance against atmospheric corrosion to a degree not less than that provided by the protective coatings specified in [7.1.2.2.3](#).

7.1.2.2.3 Cadmium plating shall not be less than 0.0003 in (0.008 mm) thick, and zinc plating shall not be less than 0.0005 in (0.013 mm) thick, except on parts where threads constitute the major portion of the area in which case the cadmium or zinc plating shall not be less than 0.00015 in (0.0038 mm) thick. Metallic parts are considered to comply with [7.1.2.2.1](#) when they are protected against atmospheric corrosion by:

- a) Hot dipped, mill galvanized sheet steel complying with the coating designation G90 in Table I of ASTM A653/A653M; or
- b) Coatings which have been determined to be equivalent to G90 under the requirements of UL 1332.

7.1.2.2.4 A metallic material other than as described in [7.1.2.2.1](#) – [7.1.2.2.3](#) shall be painted or protected in a manner that has been determined to be equivalent.

## 7.1.3 Metallic materials – system level

7.1.3.1 Combinations of metallic materials in products rated for use with gasoline/ethanol blends with nominal ethanol concentrations greater than 40 % shall be chosen to reduce degradation due to galvanic corrosion in accordance with [7.1.3.2](#) – [7.1.3.4](#).

7.1.3.2 [Table 7.1](#) shows the galvanic series for metallic materials exposed to a conductive solution of sea water. The most active material in a given combination will experience increased levels of corrosion, while the most passive material in the combination will experience reduced levels of corrosion. The greater the separation of the materials in the galvanic series of [Table 7.1](#), the more pronounced the effects would be. [Table 7.1](#) serves as a guide in selecting the appropriate test conditions based on manufacturer specified material combinations.

**Table 7.1**  
**Galvanic Series of Metal Materials**

Most passive	Platinum Gold Graphite Silver Stainless Steel Type 316 (Passive) Stainless Steel Type 304 (Passive) Titanium 13 % Chromium Stainless Steel (Passive) 76 Ni – 16 Cr – 7 Fe Alloy (Passive) Nickel (Passive) Silver Solder M-Bronze G-Bronze 70:30 Cupro Nickel Silicon Bronze Copper Red Brass Aluminum Brass Admiralty Brass Yellow Brass 60 Ni – 30 Mo – 6 Fe – 1 Mn 76 Ni – 16 Cr – 7 Fe Alloy (Active) Nickel (Active) Manganese Bronze Tin Stainless Steel Type 316 (Active) Stainless Steel Type 304 (Active) 13 % Chromium Stainless Steel (Active) Cast Iron Wrought Iron Mild Steel Aluminum 2024 Cadmium Alclad Aluminum 6053 Aluminum 1100 Galvanized Steel Zinc Magnesium Alloys Magnesium
Most active	

NOTE: Reprinted with permission from NACE. Based on table titled "Galvanic Series of Metals Exposed to Seawater" from NACE Corrosion Engineer's Reference Book, Third Edition © NACE International 2002.

7.1.3.3 Plating, such as nickel plating, can be used to reduce or eliminate dissimilar metal contact areas, as long as the plating material complies with [7.1.3.2](#) as the contact metal. If used, the plating shall comply with the Long Term Exposure Test, Section [14](#).

7.1.3.4 Gaskets or nonmetallic spacers used to reduce or eliminate dissimilar metal contact areas, where permitted, shall be subjected to the applicable requirements for static seals in Nonmetallic materials, [7.2](#), when they are in contact with the fluid.

## 7.2 Nonmetallic materials

### 7.2.1 General

7.2.1.1 A nonmetallic part in contact with the fuels anticipated by these requirements, shall be resistant to the action of the fuel if degradation of the material will result in leakage of the fuel, or if it will impair the function of the device.

7.2.1.2 Gaskets or seals shall be designated as dynamic and/or static seals. See [5.9](#) and [5.10](#) respectively. If the type of seal cannot be determined, then the material shall be treated as both a static and a dynamic seal.

7.2.1.3 Gaskets and seals shall comply with the requirements as outlined in Nonmetallic materials – material level, [7.2.2](#), and Nonmetallic materials – system level, [7.2.3](#).

7.2.1.4 Nonmetallic materials in contact with the fuels anticipated by these requirements shall not be constructed of the following:

- a) Polysulfide rubber;
- b) Ethylene propylene diene monomer (EPDM) rubber;
- c) Methyl-Methacrylate;
- d) Polyvinyl Chloride (PVC);
- e) Nylon 6/6; or
- f) Polyurethane.

### 7.2.2 Nonmetallic materials – material level

#### 7.2.2.1 Static seals

7.2.2.1.1 Static seals shall be evaluated in accordance with UL 157, modified as indicated in [7.2.2.1.3](#) – [7.2.2.1.4](#). If a specific material complies with these requirements, the material can be considered to be qualified for system level testing.

7.2.2.1.2 A static seal shall be constructed of a material that is acceptable in accordance with the scope of UL 157.

7.2.2.1.3 Static seals shall be subjected to the Volume Change and Extraction Test in accordance with UL 157, except for the following modifications:

- a) The test duration shall be  $1000 \pm 0.5$  h;
- b) The applicable test fluids shall be as described in Annex [A](#); and

c) For all materials, the average volume change shall not exceed 40 % swell (increase in volume) or 1 % shrinkage (decrease in volume). In addition, the weight loss shall not exceed 10 %. For coated fabrics, alternate limits can be used with the average volume change not exceeding 60 % swell or 5 % shrinkage, and the weight loss shall not exceed 20 %. There shall be no visual evidence of cracking or other degradation as a result of the exposure for any material including coated fabrics.

7.2.2.1.4 Static seals shall be subjected to the Compression Set Test in accordance with UL 157, except for the following modifications:

- a) The test duration shall be 1000  $\pm$ 0.5 h.
- b) The samples shall be immersed, at room temperature, in the test fluids while compressed for the entire test duration. No oven conditioning is required.
- c) The applicable test fluids shall be as described in Annex A.
- d) The recovery period shall consist of removing the sample from the compression device and immersing it in the applicable test fluid for 30  $\pm$ 2 min at room temperature. The sample shall not be allowed to dry out due to exposure to air. The 30 min immersion shall use the same fluid as the test fluid for each sample.
- e) For all materials, the average compression set is calculated and shall not exceed 35 %. For coated fabrics, alternate limits can be used with the average compression set not exceeding 70 %.

*Exception No. 1: This requirement does not apply to composite gasket or thermoplastic materials as defined in accordance with UL 157.*

*Exception No. 2: For compression static face seals under constant pressure, alternate limits can be used with the average compression set not exceeding 50 %.*

#### 7.2.2.2 Dynamic seals

7.2.2.2.1 Dynamic seals shall be evaluated in accordance with UL 157, modified as indicated in 7.2.2.2.3 – 7.2.2.2.4. If a specific material complies with these requirements, the material can be considered to be qualified for system level testing.

7.2.2.2.2 A dynamic seal shall be constructed of a material that is acceptable in accordance with the scope of UL 157.

7.2.2.2.3 Dynamic seals shall be subjected to the Volume Change and Extraction Test in accordance with UL 157, except for the following modifications:

- a) The test duration shall be 1000  $\pm$ 0.5 h;
- b) The applicable test fluids shall be as described in Annex A; and
- c) For all materials, the average volume change for a gasket or seal material shall not exceed 40 % swell (increase in volume) or 1 % shrinkage (decrease in volume). In addition, the weight loss shall not exceed 10 %. For coated fabrics, alternate limits can be used with the average volume change not exceeding 60 % swell or 5 % shrinkage, and the weight loss shall not exceed 20 %. There shall be no visual evidence of cracking or other degradation as a result of the exposure for any material including coated fabrics.

7.2.2.2.4 Dynamic seals shall be subjected to the Tensile Strength and Elongation Test in accordance with UL 157, except for the following modifications:

- a) The test duration shall be  $1000 \pm 0.5$  h;
- b) The applicable test fluids shall be as described in Annex [A](#); and
- c) For all materials, the average tensile strength and the average elongation of materials shall not be less than 60 % of the as-received values. For coated fabrics, alternate limits can be used with the average tensile strength and the average elongation not less than 30 % of the as-received values.

### 7.2.3 Nonmetallic materials – system level

7.2.3.1 For all materials, gaskets and seals that have been shown to comply with the applicable requirements for static seals in UL 157, along with the exceptions as noted in [7.2.2.1](#), the requirements of the Long Term Exposure Test, Section [14](#), shall be waived .

## 7.3 Casting impregnation materials

### 7.3.1 Material level

7.3.1.1 Casting impregnation materials shall be evaluated at the material level in accordance with the requirements in UL 87A.

### 7.3.2 System level

7.3.2.1 The casting impregnation material, applied as intended to a casting, shall comply with the Long Term Exposure Test, Section [14](#). The casting shall not show indications of porosity leakage at any point during or after this test.

## 7.4 Internal parts

7.4.1 Nonmetallic parts located internally to a fluid confining part, degradation of which would not directly result in leakage, is not required to comply with Nonmetallic materials, [7.2](#). The part shall be tested in accordance with [7.4.2](#).

7.4.2 Internal nonmetallic parts shall be tested during the Long Term Exposure Test, Section [14](#). During this test, the part shall not degrade to the extent that visible particles can be observed in the fluid.

## 7.5 Blending options

7.5.1 Hose nozzle valves intended for use with dispensing equipment that provides for a variable blending option, at gasoline/ethanol blends with nominal ethanol concentrations above 25 %, shall be subjected to the Blending Cycling Test, Section [28](#).

7.5.2 Hose nozzle valves intended for use with dispensing equipment that provides for a fixed blending option, as gasoline/ethanol blends with nominal ethanol concentrations above 25 %, shall be evaluated in accordance with (a) or (b):

- a) If intended to be located after the blending option such that the hose nozzle valve is only subjected to the final blended fuel, then the Blending Cycling Test, Section [28](#), is not required.
- b) If intended to be located at or before the blending option such that it is subjected to different gasoline/ethanol blend levels, the hose nozzle valve shall be subjected to the Blending Cycling Test, Section [28](#).

7.5.3 Hose nozzle valves intended for use with dispensing equipment that provides for a variable or fixed blending of gasoline/ethanol blends with nominal ethanol concentrations up to 25 % are considered acceptable without further evaluation for the blending option.

## 8 Bodies and Covers

8.1 A threaded section of a body intended for the connection of pipe shall have a section to serve as a wrench grip.


8.2 Pipe threads shall be in accordance with ASME B1.20.1.

*Exception: Hose nozzle valves intended for use in installations where pipe fittings incorporate other than NPT type threads shall be permitted to be provided with pipe threads complying with a national pipe thread standard compatible with those fittings. The pipe thread type shall be identified in accordance with [31.5](#).*

8.3 The couplings provided on coaxial type vapor recovery hose assemblies shall have male 1-7/8 – 12- SAE straight threads when the inner hose is intended to dispense the liquid fuel into the vehicle and 1-1/4 inch – 18 SAE Straight, M34 by 1.5 metric thread or 1 in – 11-1/2 NPT threads, as required when the outer hose is intended to dispense the liquid fuel into the vehicle. All fittings shall be designed to fit the accessories connected to the hose couplings to form a leak tight connection. Coaxial type connections shall also have the dimensions as indicated in [Figure 8.1](#).

ULNORM.COM : Click to view the full PDF of UL 2586A 2018

Figure 8.1  
Coaxial Type Connection

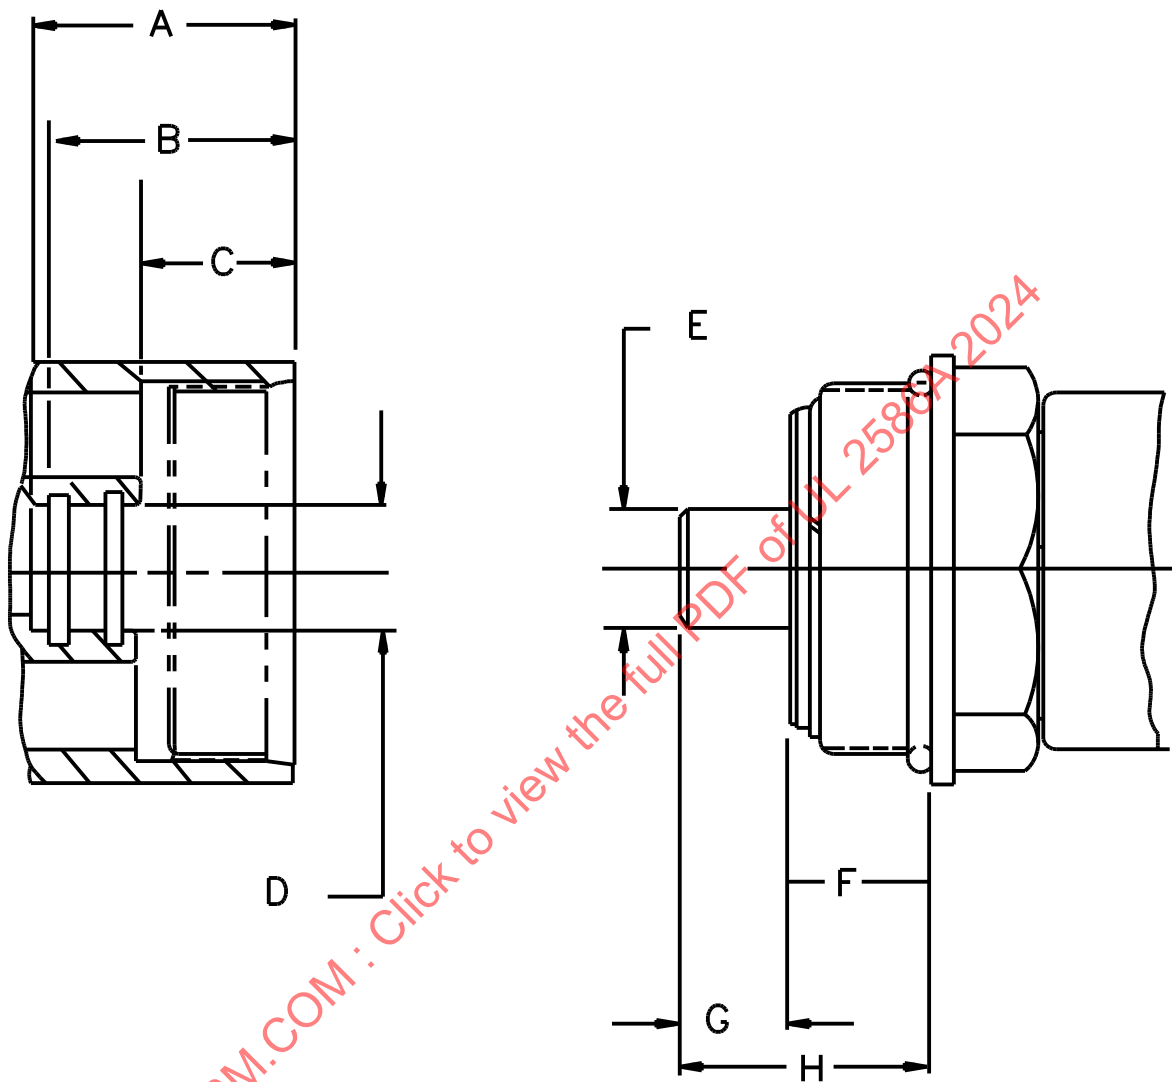

SM398

Item	in	(mm)
A	1.45 min	(36.8 min)
B	1.26 max	(32.0 max)
C	0.78 min	(19.8 min)
D	0.668 – 0.672	(17.0 – 17.1)
E	0.660 – 0.664	(16.8 – 16.9)
F	0.78 max	(19.8 max)
G	0.56 min	(14.2 min)
H	1.31 – 1.45	(33.3 – 36.8)

8.4 If the end connections of a vapor recovery fitting do not conform to the requirements specified in [8.3](#), the installation instructions which accompany each fitting shall indicate the specific equipment which is to be connected to the fitting.

8.5 Joints in a body formed of two or more parts shall be prevented from loosening as the result of the turning effort exerted by connecting or disconnecting piping. See the Deformation Test, Section [13](#).

8.6 Openings for bolts or screws used for assembly shall not extend through the outer walls of a body into a liquid-handling section.

## 9 Diaphragms

9.1 A diaphragm shall be protected from damage.

9.2 Metal parts coming in contact with a diaphragm shall have no sharp edges, burrs, projections, or the like which cause chafing or abrasion of the diaphragm.

## 10 Springs

10.1 A spring employed in a dispensing device assembly to reduce the risk of leakage, or in a safety mechanism, such as is employed in an operating handle, shall:

- a) Be protected against abrasion and corrosion; and
- b) Demonstrate no loss in strength following subjection to a compression force of three times that exerted by the spring in any position of its intended function.

10.2 In reference to [10.1\(a\)](#), springs that are exposed to the fuels anticipated by these requirements shall comply with the applicable material requirements from Materials, Section [7](#). Springs not exposed to fuels, but exposed to the environment, shall comply with the atmospheric corrosion requirements in [7.1.2.2](#).

## 11 Operating Mechanisms

11.1 Screws and nuts used to attach operating parts to movable members shall be upset or otherwise locked to prevent loosening.

11.2 A manually-operated mechanism of a hose nozzle valve shall provide free movement of all parts.

## PERFORMANCE

### 12 General

12.1 Except as otherwise indicated, representative samples of each type of hose nozzle valve shall be subjected to the tests described in these requirements. The order of tests, as far as applicable, shall be as indicated in Sections [13](#) – [28](#), with the exception of the specific test sequence shown in [12.3](#). Additional samples of parts constructed of nonmetallic materials, such as seal materials and valve seat discs, shall be provided as required for physical and chemical tests.

12.2 All tests shall be performed using the test fluids specified for that test. No substitution of test fluids is allowed. When the test indicates that CE25a, CE40a or CE85a shall be used, the test fluid shall be prepared as described in Annex [A](#).



12.3 The tests in the following sequence shall be performed on one sample of a hose nozzle valve for each applicable test fluid as described in the Long Term Exposure Test, Section [14](#). The remaining tests in this standard may be performed in any order on the same samples or on additional samples as needed.

- a) Long Term Exposure Test, Section [14](#);
- b) External Leakage Test, Section [15](#);
- c) Electrical Continuity Test, Section [24](#);
- d) Hose Nozzle Endurance Test, Section [20](#);
- e) External Leakage Test, Section [15](#);
- f) Electrical Continuity Test, Section [24](#);
- g) Hydrostatic Strength Test, Section [23](#).

12.4 To reduce the effects of seal dry out due to removal of the test fluid after specific tests, the tests in the given sequence in [12.3](#) shall be started within 4 h of removal of the previous test fluid. If necessary to coordinate testing, the sample may be left filled with the most recent test fluid at room temperature until the next test is initiated. If the previous test used an aerostatic or hydrostatic source, the sample shall be filled with kerosene.

12.5 Leakage tests for the portions of liquid handling hose nozzle valves shall be conducted using a source of aerostatic pressure. When leakage is observed, the tests shall be repeated with kerosene or Soltrol 170®.

NOTE: Soltrol® is a Registered Trademark of Chevron Phillips Chemical Company LP.

12.6 Water shall be used for developing the required pressure in a hydrostatic pressure strength test.

### 13 Deformation Test

13.1 Joints in a hose nozzle valve shall not leak, nor shall there be evidence of loosening of joints, distortion, or other damage resulting from the stress imposed on pipe-threaded sections when tested in accordance with these requirements.

13.2 A length of Schedule 80 pipe shall be connected to a female pipe threaded section of the hose nozzle body. The hose nozzle valve or pipe shall be rigidly anchored or otherwise supported during the deformation test. The male threads shall be coated as specified by the manufacturer or have pipe joint sealing compound or polytetrafluoroethylene (PTFE) tape applied to them first. No more than four revolutions of polytetrafluoroethylene (PTFE) tape shall be applied. The connection shall be tightened to the torque specified in [Table 13.1](#).

**Table 13.1**  
**Torque Requirements for Pipe Connections**

Pipe size nominal in	Outside diameter		Torque	
	in	(mm)	lb-in	(N·m)
1/2	0.840	(21.34)	800	(90)
3/4	1.050	(26.67)	1000	(113)
1	1.315	(33.40)	1200	(136)
1-1/4	1.660	(42.16)	1450	(164)
1-1/2	1.900	(48.26)	1550	(175)

13.3 After the torque force has been applied to each connected pipe, the test sample shall be subjected to the External Leakage Test, Section [15](#).

13.4 Upon removal of the pipe from the test sample, the assembly shall be examined for loosening of body joints.

13.5 If external leakage is noted at the thread joint between the pipe and body, the joint shall be remade using a pipe joint sealing material and retested for leakage.

## **14 Long Term Exposure Test**

### **14.1 General**

14.1.1 The test outlined in [14.2](#) – [14.4](#) shall be performed on one or two samples of the device. If the product is rated for use with gasoline or a gasoline/ethanol blend with a nominal ethanol concentration of up to 25 % (E0 – E25), then the test shall be performed using the CE25a test fluid. If the product is rated for use with gasoline or a gasoline/ethanol blend with a nominal ethanol concentration of up to 40 % (E0 – E40), then the test shall be performed using both the CE25a and CE40a test fluids. If the product is rated for use with a gasoline/ethanol blend with a nominal ethanol concentration of up to 85 %, then the test shall be performed using both the CE25a and the CE85a test fluids. See Annex [A](#) for the test fluids.

### **14.2 Samples**

14.2.1 Samples of complete hose nozzle valves shall be tested. All inlet openings of the samples shall be sealed in accordance with [14.2.3](#). The outlet of the hose nozzle valve is considered sealed by the actual valve mechanism of the hose nozzle valve.

14.2.2 If platings or coatings are used internal to the device, additional samples may be used. See [14.4.2](#).

14.2.3 Closures shall be provided to seal off inlet openings of all samples in accordance with [14.2.1](#). These closures shall be fabricated of materials as specified in [14.2.4](#). The closures shall be provided with a 1/4 inch NPT opening for connection to the test apparatus. All closures shall be installed by the manufacturer and provided with a torque rating. There will be no other adjustment to connections for the duration of the test.

14.2.4 Material combinations at the product and closure interface will be as specified by the manufacturer. All closures for hose nozzle valves rated for gasoline/ethanol blends with nominal ethanol concentrations up to and including 40 % shall be fabricated of suitable materials. All closures for hose nozzle valves rated for gasoline/ethanol blends with nominal ethanol concentrations above 40 % shall be fabricated of the materials representing permitted material to which the device may be connected; such as

aluminum closures representing aluminum tubing. [Table 7.1](#) shall be used to determine the worst case material interactions based on the materials specified by the manufacturer. Materials specified by the manufacturer but not included in [Table 7.1](#) shall be tested as necessary to represent worst case conditions.

14.2.5 Any o-rings, gaskets, or other sealing materials, shall be provided and installed by the manufacturer. The dynamic sealing devices or materials shall be the same as those that will be used in the final product installation. Static seals shall be representative of the seals being used in the final product installation. If the sealing device or material is not considered part of the device under test, but will be provided in the end product at the time of installation, a representative seal shall be provided for the test.

### 14.3 Method

14.3.1 The sample shall be exposed to the applicable test fluid in accordance with [14.1.1](#). The test fluids shall be prepared using the instructions in Annex [A](#).

14.3.2 A quick connect device shall be connected to the 1/4 inch NPT connection at the inlet, and shall be used to fill the samples with the applicable test fluids. A source of pressure may be used to assist in filling or draining the samples, however, the pressure shall not exceed the rated pressure of the valve under test. Once the samples are filled to exclude all air, they shall be closed off and sealed. The samples are then placed in the test chamber.

14.3.3 The chamber temperature shall be increased to  $140 \pm 3.6$  °F ( $60 \pm 2$  °C). When the chamber reaches this temperature, the exposure period begins. The samples shall be exposed to the applicable test fluid at  $140 \pm 3.6$  °F ( $60 \pm 2$  °C) for approximately  $168 \pm 0.5$  h. At the end of this duration, the exposure period shall be halted and the chamber allowed to cool. The samples shall be subjected to a 50 psig (345 kPa) pressure for at least one min. The fluid shall then be drained from the samples and observed in accordance with [14.4.2](#). After this observation, the fluid shall be discarded. The samples shall then be immediately refilled with new test fluid and the chamber temperature is allowed to increase to  $140 \pm 3.6$  °F ( $60 \pm 2$  °C) again. The total duration of the test shall equal  $1008 \pm 0.5$  h of exposure at  $140 \pm 3.6$  °F ( $60 \pm 2$  °C).

14.3.4 At the end of the total exposure duration, the test fluid shall be left in the samples and the samples shall be removed from the chamber. The samples shall then be subjected to the test sequence as outlined in [12.3](#) and in accordance with [12.4](#). Prior to the initiation of the test sequence, the Long Term Exposure test fluid shall be drained and discarded.

14.3.5 If the device contains any parts or surfaces that are plated or coated, if the device uses casting impregnation materials to eliminate porosity leakage, or if the device contains internal nonmetallic parts, the plating, coating, impregnation, or internal nonmetallic parts shall be tested both during and after this exposure. See [14.4.2](#) to [14.4.4](#).

### 14.4 Results

14.4.1 There shall be no leakage during this test. If leakage is observed at any point during the test, the test shall be stopped.

14.4.2 For platings or coatings, there shall be no softening of the plating or coating material. Compliance is checked by observance of the drained test fluid. There shall be no evidence of visible flaking or material. In addition, there shall be no substantial discoloration of the test fluid when observing the drained fluid. Discoloration is an indication of chemical attack on the plating or coating internal to the device. In order to determine that the base metal is not exposed, visual inspections shall be made. If the visual inspection requires examination of internal surfaces, the samples shall be cut open to determine compliance. If this is necessary, additional samples can be used to determine compliance with this requirement, such that the

remaining test sequence will not be disturbed by cutting open samples. However, both the samples to be cut open and the samples to be used for the test sequence are required to complete the Long Term Exposure Test, Section [14](#).

14.4.3 For casting impregnation materials, the sample shall not show evidence of porosity leakage during or after the fluid exposure duration.

14.4.4 For internal nonmetallic parts, there shall be no visible evidence of this material in the drained test fluid.

## 15 External Leakage Test

15.1 All hose nozzle valves subjected to this test shall be subjected to a test pressure as indicated in [15.4](#). Test pressures shall be developed from a hydrostatic or aerostatic source.

15.2 For tests performed using an aerostatic pressure source, the hose nozzle shall be submerged in water to a depth of approximately 1 in (25.4 mm) while under test pressure, for a duration of at least 1 min. There shall be no bubbles observed in the water, indicating leakage observed, during the duration. For tests performed using a hydrostatic pressure source, the test duration shall be 5 min.

15.3 For all hose nozzle valves, there shall be no leakage outside of fluid confining areas and there shall be no evidence of casting porosity leakage during this test.

15.4 For all tests, the inlet of the device shall be connected to the source of pressure of 25 psig (172 kPa) with the valve open and the outlet blocked. If a vacuum shutoff opening is provided it shall be sealed to prevent the test medium from returning into the nozzle. The test shall be repeated with a test pressure of 75 psig (517 kPa) with the valve closed and the outlet open.

15.5 A positive shutoff valve and a calibrated pressure indicating device shall be installed in the pressure supply piping. The pressure indicating device shall be installed in the piping between the shutoff valve and the device under test.

15.6 In accordance with [15.5](#), the pressure indicating device shall comply with one of the following:

- a) An analog gauge having a pressure range such that the test pressure is between 30 and 70 % of the maximum scale reading of the gauge;
- b) A digital pressure transducer, or other digital gauge, that is calibrated over a range of pressure that includes the test pressure; or
- c) Other devices that are equivalent to the devices in (a) or (b).

15.7 If a hose nozzle valve is provided with a vapor return portion, the valve shall also be checked for leakage as indicated in [15.2](#) at 0.75 psig (5.2 kPa).

## 16 Hose Nozzle Valve Guard Strength Test

16.1 An operating lever guard of a hose nozzle valve shall protect the lever and valve operating parts from damage when tested as described below.

16.2 Prior to the beginning of this test, a hose nozzle valve shall be found in compliance with the requirements for external leakage. See External Leakage Test, Section [15](#).

*Exception: When alternate nonmetallic materials are used for the hose nozzle valve guard, the prior and after leakage tests are not required.*

16.3 The hose nozzle valve is to be attached to a 120 in  $\pm 1$  in (3048 mm  $\pm 25.4$  mm) length of appropriate diameter size gasoline hose. The valve shall be dropped from a height of 48 in  $\pm 0.5$  in (1219 mm  $\pm 12.7$  mm) onto a concrete floor, employing the hose in a manner which tends to make the operating lever guard strike the floor first as specified in [16.4](#).

16.4 For all hose nozzle valves, the test sample shall be dropped ten times. For hose nozzle valves that have a nonmetallic operating lever guard assembly and/or a nonmetallic vacuum cap the test sample shall be dropped ten times on the guard and ten times on the vacuum cap. The spout of the test sample need not incorporate a shear groove or machined weak section, even though such is normally provided in the assembly. When the spout breaks off during the test, it shall be replaced and the test continued. At the completion of this test, the operating lever guard shall remain intact. The test nozzle valve shall function as intended when operated as specified in [17.1.1](#).

*Exception: A hose nozzle valve that uses the same nonmetallic material for the operating lever guard and the vacuum cap only needs the drop test conducted on both parts after conditions a and b. The remaining conditions (c, d, and e) and drop tests only need to be conducted on the lever guard. Refer to [16.6](#) for the different conditions.*

16.5 Following completion of the tests in [16.3](#) and [16.4](#), the test valve shall conform to the requirements for external leakage. See External Leakage Test, Section [15](#).

16.6 All hose nozzle valves that have a nonmetallic lever guard assembly and/or a nonmetallic vacuum cap shall be conditioned at the following temperatures and in the following fluids:

- a) 24  $\pm 0.5$  h at  $-40 \pm 1.8$  °F ( $-40 \pm 1$  °C);
- b) At least 60 d at 212  $\pm 1.8$  °F (100  $\pm 1$  °C);
- c) 168  $\pm 0.5$  h exposure to vapors of ASTM Reference Fuels C and H at 73  $\pm 3.6$  °F (23  $\pm 2$  °C), 50  $\pm 10$  % RH;
- d) 720  $\pm 0.5$  h UV and water, or at least 1000 h Xenon (ASTM G151 and ASTM G155);
- e) After three cycles of:
  - 1) 24  $\pm 0.5$  h at 176  $\pm 1.8$  °F (80  $\pm 1$  °C), 96  $\pm 4$  % RH;
  - 2) 24  $\pm 0.5$  h at  $-40 \pm 1.8$  °F ( $-40 \pm 1$  °C);
  - 3) 24  $\pm 0.5$  h at , 176  $\pm 1.8$  °F (80  $\pm 1$  °C) RH is not controlled; and
  - 4) 24  $\pm 0.5$  h at  $-40 \pm 1.8$  °F ( $-40 \pm 1$  °C)

*Exception No. 1: Acetal polymers are not subjected to the fluids in (c).*

*Exception No. 2: The 720 h UV (d) is not required if the material has a UL 746C outdoor use rating and the exposure to UV light, water exposure and immersions tests have been conducted.*

16.7 A different sample shall be used for each conditioning and after each conditioning the nonmetallic lever guard assembly and/or the nonmetallic vacuum cap shall be dropped as described in [16.3](#).

16.8 After the ten drops, the guard assembly and/or the nonmetallic vacuum cap shall not break or crack.

## 17 Operation Test

### 17.1 Automatic hose nozzle valve

17.1.1 An automatic hose nozzle valve shall function as intended when operated at least ten times at each notch setting. The inlet flow pressure shall be limited to a gauge pressure of 8 psig (55 kPa) using an acceptable pumping unit, flow regulator, and pressure regulator. The resultant flow shall be measured. When the flow rate exceeds 5 US gal (19 L) / min at an inlet pressure of 8 psig (55 kPa), the test shall be conducted at a flow rate of 5 US gal (19 L) / min at any resulting inlet flow pressure.

*Exception: The valve may be operated at a flow rate of 5 US gal (19 L) / min at any resulting inlet flow pressure when this is followed by operating the valve at an inlet flow pressure of 8 psig (55 kPa) at any resulting flow rate.*

17.1.2 Automatic hose nozzle valves equipped with an integral hold open or latching device shall shut off or cease the flow of liquid when tested as described below.

17.1.3 A sample of the hose nozzle valve shall be connected to a pump with a control valve in the piping to limit the pressure and flow of kerosene or Soltrol® 170.

NOTE: Soltrol® is a Registered Trademark of Chevron Phillips Chemical Company L.P.

17.1.4 For nozzles with a "no pressure-no flow" feature the nozzle shall be latched open at the flow rates indicated below. With the nozzle held or latched open, the supply pump shall then be shut down and the pressure allowed to drop to zero. The supply shall then be turned on again to determine if the nozzle automatically closed. This shall be repeated 10 times at each flow rate.

17.1.5 For nozzles with an "Interlock" feature the nozzle shall be latched open at the flow rates as indicated below while the operator manually pulls the interlock device to activate the nozzle mechanism. While the liquid is flowing and the nozzle is held or latched open, the operator shall release the interlock to determine if the nozzle automatically closes. This shall be repeated 10 times at each flow rate.

#### Flow Rates

- a) High latch (high flow) position with inlet flow pressure at 21.8 psig (150 kPa); and
- b) Low latch (low flow) with inlet flow pressure at 8 psig (55 kPa).

### 17.2 Bellows secondary shut off operation

17.2.1 Hose nozzle valves designed with a bellows secondary shutoff feature shall shut off operation to the nozzle when operated as intended. This test shall be repeated after the Bellows Secondary Shut Off Operation Test, Section [21](#).

## 18 Pull Test

18.1 An automatic hose nozzle valve shall shear or break off so as to separate the valve body from the spout when subjected to a right angle pull force of not more than:

- a) 150 lb (667 N) for a nozzle with a spout diameter less than 1 in (25.4 mm); or
- b) 180 lb (801 N) for a nozzle with a spout diameter of 1 in (25.4 mm) to 1.25 in (31.8 mm).