



UL 498M

STANDARD FOR SAFETY

Marine Shore Power Inlets

ULNORM.COM : Click to view the full PDF of UL 498M 2024

ULNORM.COM : Click to view the full PDF of UL 498M 2024

UL Standard for Safety for Marine Shore Power Inlets, UL 498M

First Edition, Dated July 29, 2020

SUMMARY OF TOPICS

This revision of ANSI/UL 498M dated August 20, 2024 is being issued to update the title page to reflect the most recent designation as a Reaffirmed American National Standard (ANS). No technical changes have been made.

Text that has been changed in any manner or impacted by ULSE's electronic publishing system is marked with a vertical line in the margin.

The requirements are substantially in accordance with Proposal(s) on this subject dated June 28, 2024.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of ULSE Inc. (ULSE).

ULSE provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will ULSE be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if ULSE or an authorized ULSE representative has been advised of the possibility of such damage. In no event shall ULSE's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold ULSE harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 498M 2024

JULY 29, 2020
(Title Page Reprinted: August 20, 2024)



ANSI/UL 498M-2020 (R2024)

1

UL 498M

Standard for Marine Shore Power Inlets

First Edition

July 29, 2020

This ANSI/UL Standard for Safety consists of the First Edition including revisions through August 20, 2024.

The most recent designation of ANSI/UL 498M as a Reaffirmed American National Standard (ANS) occurred on August 20, 2024. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

Comments or proposals for revisions on any part of the Standard may be submitted to ULSE at any time. Proposals should be submitted via a Proposal Request in the Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

Our Standards for Safety are copyrighted by ULSE Inc. Neither a printed nor electronic copy of a Standard should be altered in any way. All of our Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of ULSE Inc.

© 2024 ULSE Inc. All rights reserved.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 498M 2024

CONTENTS

INTRODUCTION

1	Scope	5
2	Components	5
3	Units of Measurement	6
4	Referenced Publications	6
5	Glossary	6

CONSTRUCTION

6	General	7
7	Insulating Materials	8
8	Corrosion Resistance	8

PERFORMANCE

9	General	9
10	Salt-Spray Test	9
11	Dielectric Voltage-Withstand Test	9
12	Mechanical Strength Test	9
13	Water-Spray Test	11
14	Shock Test	14

ULNORM.COM : Click to view the full PDF of UL 498M 2024

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 498M 2024

INTRODUCTION

1 Scope

1.1 These requirements cover marine shore power inlets rated at not less than 20 A and not more than 50 A, 250 V maximum. These devices are intended for use with marine shore power cable sets to extend the shore power supply from a shore-installed power outlet to a boat, in accordance with the applicable requirements in the American Boat and Yacht Council (ABYC), E-8-1985, National Fire Protection Association Standard for Pleasure and Commercial Motor Craft, NFPA No. 302-1987, and the United States Coast Guard (USCG) Regulations Title 33, Chapter 1, CFR, Part 183.

1.2 Shore power inlets shall also comply with the applicable requirements of either UL 498F or UL 498D as identified in [Table 1.1](#), except as modified by these requirements.

Table 1.1
ANSI/NEMA Configuration with Applicable UL Standards

ANSI/NEMA Configuration	Applicable UL Standard
L5-20P	UL 498F
L5-30P	UL 498F
L6-20P	UL 498F
L6-30P	UL 498F
L14-20P	UL 498F
L14-30P	UL 498F
L15-20P	UL 498F
L15-30P	UL 498F
L21-20P	UL 498F
L21-30P	UL 498F
SS1-50P	UL 498D
SS2-50P	UL 498D

2 Components

2.1 A component of a product covered by this Standard shall:

- Comply with the requirements for that component as specified in this Standard;
- Be used in accordance with its rating(s) established for the intended conditions of use; and
- Be used within its established use limitations or conditions of acceptability.

2.2 A component of a product covered by this Standard is not required to comply with a specific component requirement that:

- Involves a feature or characteristic not required in the application of the component in the product;
- Is superseded by a requirement in this Standard; or
- Is separately investigated when forming part of another component, provided the component is used within its established ratings and limitations.

2.3 Specific components are incomplete in construction features or restricted in performance capabilities. Such components are intended for use only under limited conditions, such as certain temperatures not exceeding specified limits, and shall be used only under those specific conditions.

2.4 A component that is also intended to perform other functions such as overcurrent protection, ground-fault circuit-interruption, surge suppression, any other similar functions, or any combination thereof, shall comply additionally with the requirements of the applicable UL standard(s) that cover devices that provide those functions.

3 Units of Measurement

3.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

4 Referenced Publications

4.1 Any undated reference to a code or standard appearing in the requirements of this Standard shall be interpreted as referring to the latest edition of that code or standard.

4.2 The following publications are referenced in this Standard:

ANSI/NEMA WD6, *Wiring Devices – Dimensional Specifications*
ASTM B117, *Standard Practice for Operating Salt Spray (Fog) Apparatus*
CFR, Part 183, *United States Coast Guard (USCG) Regulations Title 33, Chapter 1*
E-8-1985, *American Boat and Yacht Council (ABYC)*
NFPA No. 302-1987, *National Fire Protection Association Standard for Pleasure and Commercial Motor Craft*
UL 498D, *Standard for Attachment Plugs, Cord Connectors and Receptacles with Arcuate (Locking Type) Contacts*
UL 498F, *Standard for Plugs, Socket-Outlets and Couplers with Arcuate (Locking Type) Contacts*
UL 514A, *Standard for Metallic Outlet Boxes*
UL 514C, *Standard for Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers*
UL 514D, *Standard for Cover Plates for Flush-Mounted Wiring Devices*
UL 746C, *Standard for Polymeric Materials – Use in Electrical Equipment Evaluations*

5 Glossary

5.1 For the purpose of this supplement, the following definitions apply.

5.2 FACE COVER – A threaded or hinged cover intended to restrict water from coming in contact with the male blades of a shore power inlet when it is not connected to a shore power cable set.

5.3 SHORE POWER CABLE SET – A length of flexible cord or cable assembled with a locking-type grounding attachment plug as a line fitting and a locking-type grounding cord connector as a load fitting intended to be used to supply shore power to boats that are moored to a dock.

5.4 SHORE POWER INLET – A boat-mounted inlet (motor attachment plug) intended to provide connection for a shore power cable set.

CONSTRUCTION

6 General

6.1 A marine shore power inlet shall comply with the requirements for inlets in this Standard and the requirements for wet-location cover plates in UL 514A, UL 514C, or UL 514D, as applicable, except as modified by the requirements in this supplement.


6.2 A shore power inlet shall employ an ANSI/NEMA WD6: L5-20P, L5-30P, L6-20P, L6-30P, L14-20P, L14-30P, L15-20P, L15-30P, L21-20P, L21-30P, SS1-50P, or SS2-50P configuration.

6.3 A shore power inlet shall be provided with a threaded hub and a threaded or hinged face cover. The hub and the face cover, if threaded, shall have a 2-3/4 – 16, Class 2 thread having at least three full threads. A shore power inlet shall be dimensioned to couple with a shore power cable set load fitting of a corresponding configuration. The face cover shall be positively retained in place on the shore power inlet. See [Table 6.1](#) and [Figure 6.1](#) for the required dimensions.

Table 6.1
Dimensions for a Shore Power Inlet as Shown in [Figure 6.1](#)

Rating	Shore power inlet inches (mm)		NEMA WD6 designation
	A ^a	B	
20A, 125 V, 1 Phase, 2 Pole, 3 Wire	1.880 (47.75)	0.921 ^b (23.39)	L5-20P
30 A, 125 V, 1 Phase, 2 Pole, 3 Wire	1.880 (47.75)	1.000 ^b (25.40)	L5-30P
20 A, 250 V, 1 Phase, 2 Pole, 3 Wire	1.880 (47.75)	0.921 ^b (23.39)	L6-20P
30 A, 250 V, 1 Phase, 2 Pole, 3 Wire	1.880 (47.75)	1.000 ^b (25.40)	L6-30P
20 A, 125/250 V, 1 Phase, 3 Pole, 4 Wire	2.000 (50.80)	0.921 ^b (23.39)	L14-20P
30 A, 125/250 V, 1 Phase, 3 Pole, 4 Wire	2.000 (50.80)	1.000 ^b (25.40)	L14-30P
20 A, 250 V, 3 Phase, 3 Pole, 4 Wire	2.000 (50.80)	0.921 ^b (23.39)	L15-20P
30 A, 250 V, 3 Phase, 3 Pole, 4 Wire	2.000 (50.80)	1.000 ^b (25.40)	L15-30P
20 A, 208Y/120 V, 3 Phase, 4 Pole, 5 Wire	2.000 (50.80)	0.921 ^b (23.39)	L21-20P
30 A, 208Y/120 V, 3 Phase, 4 Pole, 5 Wire	2.000 (50.80)	1.000 ^b (25.40)	L21-30P
50 A, 125 V, 1 Phase, 2 Pole, 3 Wire	2.015 (51.18)	1.163 ^c (29.54)	SS1-50P
50 A, 125/250 V, 1 Phase, 3 Pole, 4 Wire	2.015 (51.18)	1.163 ^c (29.54)	SS2-50P
^a Minimum dimension.			
^b Tolerance of minus 0, plus 0.031 inches (plus 0.79 mm).			
^c Maximum dimension.			

Figure 6.1
Dimensions of a Shore Power Inlet

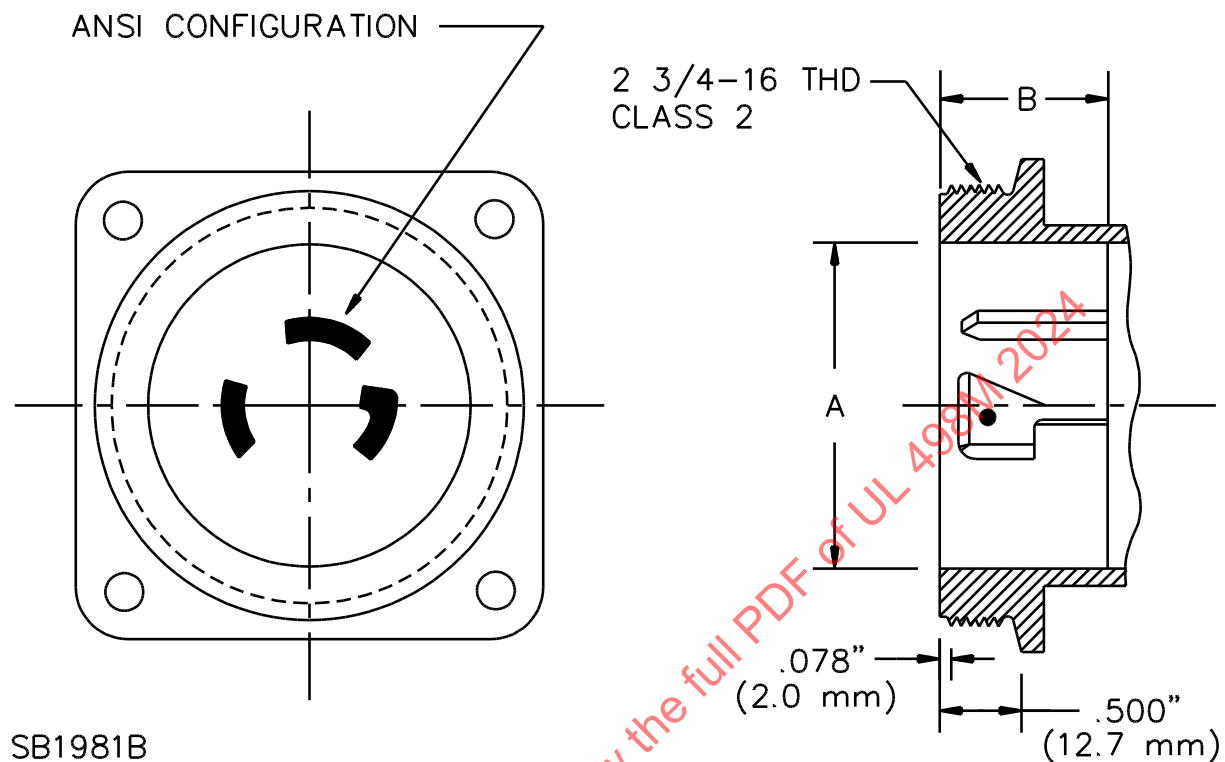

6.4 With the face cover in the closed position, the construction of a shore power inlet shall not permit water to enter the inlet and contact the blades or face of the device as determined by the Water-Spray Test, Section [13](#).

7 Insulating Materials

7.1 An insulating material employed in a shore power inlet shall comply with the Ultraviolet Light Exposure Test and the Water Exposure and Immersion Test in UL 746C.

Exception: A material used only on the blade face or rear housing of the shore power inlet is not required to be subjected to the Ultraviolet Light Exposure Test.

8 Corrosion Resistance

8.1 All current-carrying parts shall be copper alloy. The blades of the shore power inlet shall be provided with a corrosion-resistant plating.

8.2 Noncurrent-carrying metal parts, such as metal strain-relief clamps or hinges that are depended upon to meet the requirements of the standard, shall be galvanically compatible with other metal parts of the shore power inlet, and shall provide corrosion resistance equivalent to that of:

- a) Stainless steel alloys 302, 304, 410, or 430, or
- b) Bronze alloys with less than 15 percent zinc content.

8.3 If there is any question as to whether the parts are corrosion resistant, the Salt-Spray Test, Section [10](#), shall be performed.

PERFORMANCE

9 General

9.1 A shore power inlet shall be subjected to the Mechanical Strength Test, Section [12](#), the Water-Spray Test, Section [13](#), and the Shock Test, Section [14](#). If necessary to determine compliance with the corrosion resistance requirements in [8.2](#), a shore power inlet shall also be subjected to the Salt-Spray Test, Section [10](#), and the Dielectric Voltage-Withstand Test, Section [11](#).

10 Salt-Spray Test

10.1 If necessary to determine compliance with the corrosion resistance requirement in [8.2](#), a shore power inlet shall be exposed to salt spray (fog) as described in [10.2](#). Following the exposure, the shore power inlet shall comply with the Dielectric Voltage-Withstand Test, Section [11](#), the Mechanical Strength Test, Section [12](#), and the Water-Spray Test, Section [13](#).

10.2 The salt spray exposure is to be conducted for a period of 750 hours in accordance with ASTM B117.

11 Dielectric Voltage-Withstand Test

11.1 After being subjected to the Salt-Spray Test, Section [10](#), a shore power inlet shall withstand without breakdown the application of a 60 Hz essentially sinusoidal potential of 1250 V applied for one minute between live parts of opposite polarity and between live parts and accessible dead metal parts.


11.2 The test potential is to be supplied from a 500 VA or larger capacity testing transformer whose output is essentially sinusoidal and can be varied. The applied potential is to be increased from zero until the required test voltage is reached and is to be held at that voltage for a period of one minute. The increase in the applied potential is to be at a uniform rate that is as rapid as is consistent with its value being correctly indicated by the voltmeter.

12 Mechanical Strength Test

12.1 As a result of the test described in [12.2](#) – [12.4](#), there shall not be any cracking, breaking, or other physical deterioration of the shore power inlet.

12.2 One shore power inlet is to be installed on a platform as shown in [Figure 12.1](#). A 50 feet (15.2 m) shore power cable set is to be connected between the shore power inlet and a fixed end (to simulate its connection to a power inlet) as shown in the figure. The excess cord of the shore power cable set is to be coiled between the shore power inlet and the fixed point and taped at the base of the coil. During the test, the shore power cable set is to be free to move without striking any surface.

Figure 12.1
Mechanical Strength Test Apparatus

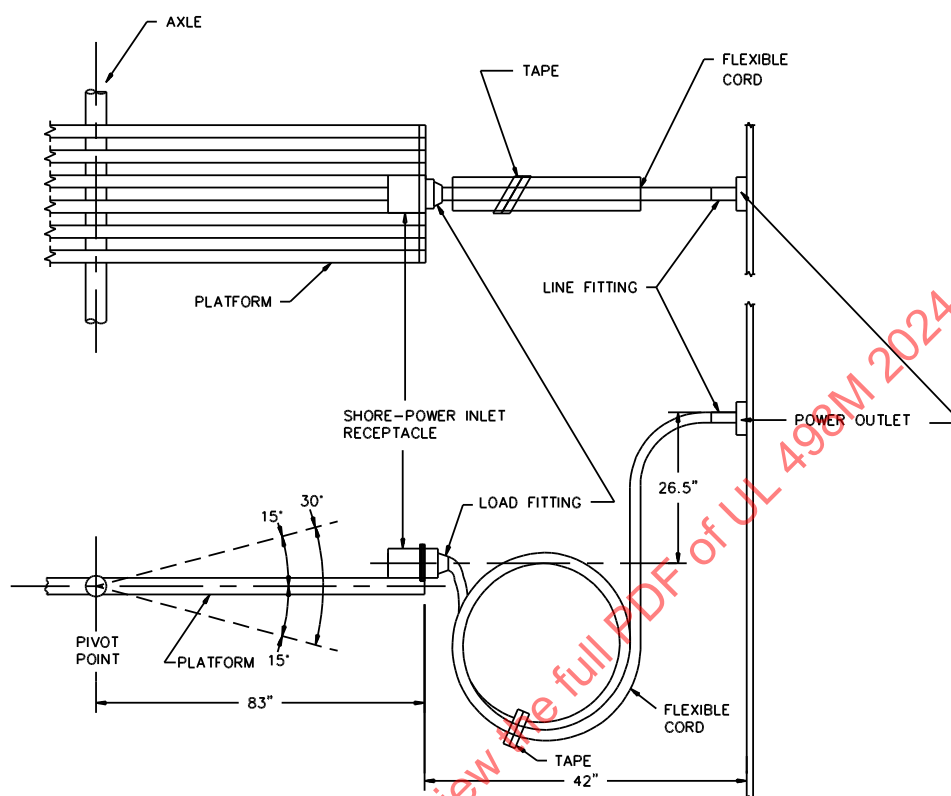

SB1968

inch	26.5	42	83
mm	673	1067	2108

12.3 The platform is to be rotated to cause the mounted power inlet to move back and forth in a vertical direction through an angle of 30 degrees (15 degrees above and below the horizontal) for a total of 1000 cycles at a rate of 15 cycles per minute.

12.4 After completion of the 1000 cycles, the shore power inlet is to be visually examined for damage including cracking of the insulation materials, boots, and covers.

13 Water-Spray Test

13.1 As a result of the test described in [13.2](#) – [13.4](#), water shall not contact the current-carrying parts of a shore power inlet.

13.2 One shore power inlet is to be mounted to a vertical wall section with its face cover in the closed position.

13.3 The shore power inlet is then to be sprayed with water for one hour. The water-spray apparatus is to consist of three spray heads mounted in a water-supply pipe rack as illustrated in [Figure 13.1](#). The spray heads are to be constructed in accordance with [Figure 13.2](#). The water-supply pipe rack with spray heads is to be located so that the focal point of the spray is at the face cover of the shore power inlet. The water pressure is to be maintained at 5 lbs./inch² (34 kPa) at each spray head.

ULNORM.COM : Click to view the full PDF of UL 498M 2024