

First edition  
2013-06-01

**AMENDMENT 1**  
2016-02-15

---

---

**Information technology —  
Security techniques — Lightweight  
cryptography —**

Part 4:  
**Mechanisms using asymmetric  
techniques**

**AMENDMENT 1**

*Technologies de l'information — Techniques de sécurité —  
Cryptographie pour environnements contraints —*

*Partie 4: Mécanismes basés sur les techniques asymétriques*

*AMENDEMENT 1*

IECNORM.COM : Click to view the full PDF of ISO/IEC 29192-4:2013/Amd1:2016

---

---

Reference number  
ISO/IEC 29192-4:2013/Amd.1:2016(E)



IECNORM.COM : Click to view the full PDF of ISO/IEC 29192-4:2013/AMD1:2016



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/IEC JTC 1, *Information technology*, Subcommittee SC 27, *Security techniques*.

IECNORM.COM : Click to view the full PDF of ISO/IEC 29192-4:2013/AMD1:2016

# Information technology — Security techniques — Lightweight cryptography —

## Part 4: Mechanisms using asymmetric techniques

### AMENDMENT 1

#### *Page v, Introduction*

*Change the first sentence to:*

This part of ISO/IEC 29192 specifies four lightweight mechanisms based on asymmetric cryptography.

*Add the following after the third bullet:*

- ELLI is a unilateral authentication scheme based on discrete logarithms on elliptic curves over finite fields of characteristic two. The scheme is particularly designed with regard to use in passive RFID tags of vicinity type.

NOTE ELLI has been successfully implemented on a passive RFID tag fully compliant to ISO/IEC 15693/18000-3. Prototype tags with practical working distance of “vicinity type” were presented at CeBIT 2008 and EuroID 2008.

*Add the following after the patent holder of Agency for Science, Technology and Research:*

Siemens Aktiengesellschaft

CT IP LT M&A, Otto-Hahn-Ring 6, 81739 Muenchen, Germany

#### *Page 1, Scope*

*Change the first sentence to:*

This part of ISO/IEC 29192 specifies four lightweight mechanisms using asymmetric techniques:

*Add the following item to the list:*

- a unilateral authentication scheme (ELLI) based on discrete logarithms on elliptic curves defined over finite fields of characteristic two.

#### *Page 1, Terms and definitions*

*Add the following and renumber all the terms and definitions alphabetically:*

#### **3.28**

##### **finite field of characteristic two**

finite field whose number of elements is a power of two

Note 1 to entry: All finite fields of characteristic two containing the same number of elements are isomorphic. The specific model for the description of the finite field of characteristic two that is used in this part of ISO/IEC 29192 is given in Annex E.

3.29

**ordinary elliptic curve over a finite field of characteristic two**

elliptic curve over a finite field  $F$  of characteristic two defined by a short (affine) Weierstrass equation of type  $Y^2 + XY = X^3 + aX^2 + b$ , with  $a, b \in F$  and  $b \neq 0_F$

Note 1 to entry: A reference for the group properties of elliptic curves is ISO/IEC 15946-1:2008, Annex B.

Note 2 to entry: The set of points on  $E$  together with one extra symbol  $0_E$  constitute a finite abelian group.

**Page 4, Symbols and abbreviated terms**

Replace the following symbol:

$|A|$  bit size of the number  $A$  if  $A$  is a non-negative integer (i.e. the unique integer  $i$  so that  $2^{i-1} \leq A < 2^i$  if  $A > 0$ , or 0 if  $A = 0$ , e.g.  $|65\ 537| = |2^{16} + 1| = 17$ ), or bit length of the bit string  $A$  if  $A$  is a bit string

NOTE To represent a number  $A$  as a string of  $\alpha$  bits with  $\alpha > |A|$ ,  $\alpha - |A|$  bits set to 0 are appended to the left of the  $|A|$  bits.

with

$|\Phi|$  bit size of the number  $\Phi$  if  $\Phi$  is a non-negative integer (i.e. the unique integer  $i$  so that  $2^{i-1} \leq \Phi < 2^i$  if  $\Phi > 0$ , or 0 if  $\Phi = 0$ , e.g.  $|65\ 537| = |2^{16} + 1| = 17$ ), or bit length of the bit string  $\Phi$  if  $\Phi$  is a bit string

NOTE To represent a number  $\Phi$  as a string of  $\alpha$  bits with  $\alpha > |\Phi|$ ,  $\alpha - |\Phi|$  bits set to 0 are appended to the left of the  $|\Phi|$  bits.

Replace the following symbol:

$\lfloor A \rfloor$  the greatest integer that is less than or equal to the real number  $A$

with

$\lfloor \Phi \rfloor$  the greatest integer that is less than or equal to the real number  $\Phi$

Replace the following symbol:

$A[i]$  the  $i^{\text{th}}$ -bit of the number  $A$ , where  $A[1]$  is the right-most bit and  $A[|A|]$  is the left-most bit

with

$\Phi[i]$  the  $i^{\text{th}}$ -bit of the number  $\Phi$ , where  $\Phi[1]$  is the right-most bit and  $\Phi[|\Phi|]$  is the left-most bit

Replace the following symbol:

$B || C$  bit string resulting from the concatenation of data items  $B$  and  $C$  in the order specified.

with

$\Psi || \Gamma$  bit string resulting from the concatenation of data items  $\Psi$  and  $\Gamma$  in the order specified.

Insert the following symbols and abbreviated terms and rearrange Clause 4 alphabetically:

$A$  claimant

$B$  verifier

$E_{\{a,b\}}$	ordinary elliptic curve over $F(2^g)$ given by its short (affine) Weierstrass equation $Y^2 + XY = X^3 + aX^2 + b$ , together with a point $O_E$ at infinity, with $a, b \in F(2^g)$ and $b \neq 0_F$ . (domain parameter)
$E_{twist}$	elliptic curve twisted to the elliptic curve $E$ (domain parameter, but not explicitly used)
$\#(E_{\{a,b\}})$	order (cardinality) of $E_{\{a,b\}}$ (domain parameter)
$F(2^g)$	finite field consisting of exactly $2^g$ elements, $g$ a positive integer
$f(X)$	irreducible polynomial over $F(2)$ which is used in the construction of $F(2^g)$
$MUL_{b,aff}(k, x_R)$	function depending on the field element $b \neq 0_F$ that adjoins to the element $x_R$ from $F(2^g)$ and the integer $k$ the (affine) $x$ -coordinate $X_S Z_S^{-1}$ of the point $S = [k]R = (X_S : Y_S : Z_S)$ on an ordinary elliptic curve defined over $F(2^g)$ with parameter $b$ and with $R$ a point on this curve with affine $x$ -coordinate $x_R$
NOTE	For the mathematical background of $MUL_{b,aff}(k, x_R)$ , see Annex F.
$MUL_{b,proj}(k, x_R)$	function depending on the field element $b \neq 0_F$ that adjoins to the element $x_R$ from $F(2^g)$ and the integer $k$ the projective $x$ -coordinate $(X_S : Z_S)$ of the point $[k]R = S = (X_S : Y_S : Z_S)$ on an ordinary elliptic curve defined over $F(2^g)$ with parameter $b$ and with $R$ a point on this curve with affine $x$ -coordinate $x_R$
NOTE	For the mathematical background of $MUL_{b,proj}(k, x_R)$ , see Annex F.
$S, T, U$	points on the elliptic curve $E$
$Tr(a)$	$Tr(a) = a^{2^0} + a^{2^1} + \dots + a^{2^{(g-1)}}$ , for an arbitrary element $a$ of $F(2^g)$ . $Tr$ is the "trace function" and $Tr(a)$ is the "trace of the field element $a$ ". The trace function takes only the two values $1_F$ and $0_F$ .
$(X_R, Y_R)$	affine coordinates of point $R$ , where $x_R$ denotes the $x$ -coordinate and $Y_R$ denotes the $y$ -coordinate of point $R$
NOTE	The point $O_E$ does not have a representation using affine coordinates.

$(X_R : Y_R : Z_R)$  projective coordinates of the point  $R$ .  $(X_R : Y_R : Z_R)$  is the equivalency class of triples  $(X_{R'}, Y_{R'}, Z_{R'})$  of elements of  $F(2^g)$  that solve the adjoined (projective) Weierstrass equation  $Y^2Z + XYZ = X^3 + aX^2Z + bZ^3$ , where  $(X_{R'}, Y_{R'}, Z_{R'})$  is called equivalent to  $(X_R, Y_R, Z_R)$ , if and only if  $X_{R'} = \lambda X_R$ ,  $Y_{R'} = \lambda Y_R$  and  $Z_{R'} = \lambda Z_R$ , with some element  $\lambda \neq 0_F$ .

NOTE The point  $O_E$  has projective coordinates  $(0_F : 1_F : 0_F)$ .

$(X_R : Z_R)$  projective x-coordinate of point  $R$

NOTE 1  $Z_R \neq 0_F$  and  $(X_R : Z_R)$  corresponds to the affine coordinate  $X_R Z_R^{-1} \in F(2^g)$ .

NOTE 2 A point  $R$  with affine coordinates  $(x_R, y_R)$  has projective coordinates  $(x_R : y_R : 1_F)$ .

NOTE 3 A point  $R$  with projective coordinates  $(X_R : Y_R : Z_R)$  has affine coordinates  $(X_R Z_R^{-1}, Y_R Z_R^{-1})$ .

**Page 13**

Add the following new Clause 8 after 7.5:

**8 Unilateral authentication mechanism based on discrete logarithms on elliptic curves over finite fields of characteristic two**

**8.1 General**

This mechanism, ELLI, has been designed to make asymmetric cryptography available on passive RFID tags of vicinity type (working distance of up to 1 m) for the intended main application of brand protection/anti-counterfeiting in large decentralized systems. The ELLI scheme and the concept to implement it on a passive RFID tag were firstly presented in a submission to the German IT-Security Competition held by the Horst-Görtz foundation in 2006. The scheme is also described (without using the name ELLI) in References [30] and [31].

The concept underlying ELLI is closely related to the Diffie-Hellman analogue for elliptic curves over  $F(2^g)$ . But, as it makes use of some specific protocol and parameter optimization steps, it was given a name of its own. These optimizations comprise the following:

- The y-coordinates of points on elliptic curves are unused.
- Checks on whether or not a given field element is the x-coordinate of a point on a claimed elliptic curve are omitted.

NOTE ELLI stands for ELLIPTIC LIGHT.

**8.2 Security requirements for the environment**

The ELLI scheme is a unilateral authentication mechanism based on discrete logarithms on elliptic curves defined over a finite field of characteristic two. It enables a verifier to check that a claimant knows the elliptic curve discrete logarithm of a claimed public point with respect to a base point.

A general framework for cryptographic techniques based on elliptic curves is given in ISO/IEC 15946-1. For the ELLI mechanism, some additional properties of elliptic curves defined over finite fields  $F(2^g)$  are used that are not described in ISO/IEC 15946-1. These properties are presented below.

Within a given domain, the following requirements shall be satisfied. Domain parameters that govern the operation of the mechanism shall be selected. These parameters comprise the following:

- a finite field  $F(2^g)$  of characteristic two;
- an ordinary elliptic curve  $E$  defined over  $F(2^g)$ . The elliptic curve  $E$  shall be given by its short Weierstrass equation  $Y^2 + XY = X^3 + aX^2 + b$ , with  $b \neq 0_F$ , and shall be chosen in such a way that the following two conditions hold:
  - $\#(E) = 4q_1$ , with a prime  $q_1$ ;
  - $\#(E_{twist}) = 2q_2$ , with a prime  $q_2$ ;
- a point  $P = (x_p, y_p)$  on  $E$  generating a subgroup of order  $q_1$ .

NOTE 1 In this situation, the condition  $q_1 < q_2$  is automatically fulfilled. This is due to the fact that  $\#(E)$  and  $\#(E_{twist})$  are of the same order of magnitude as a consequence of the Hasse-Weil theorem (see Annex F).

The size of the finite field  $F(2^g)$  and the parameters of the two curves  $E$  and  $E_{twist}$  are chosen in such a way that solving the elliptic curve discrete logarithm problem and solving the static Diffie-Hellman problem in both  $E$  and  $E_{twist}$  are computationally infeasible tasks.

The selected parameters shall be made available, to the necessary extent and in a reliable manner, to all entities within the domain.

- a) Every claimant shall be equipped with a private key.
- b) Every claimant shall have the ability to execute the operations addition and multiplication in  $F(2^g)$ .
- c) Every claimant shall be able to execute the function  $MUL_{b,proj}$  introduced in Clause 4, for the specific value  $b$  related to the elliptic curve  $E$ .
- d) Every verifier shall obtain an authentic copy of the public key corresponding to the claimant's private key.
- e) Every verifier shall be equipped with the base point  $P$  of the elliptic curve  $E$  and with the order  $q_1$  of  $P$ .
- f) Every verifier shall have the ability to execute the operations addition, multiplication and division in  $F(2^g)$ .
- g) Every verifier shall be able to generate randomly positive integers  $< q_1$ .
- h) Every verifier shall be able to execute the function  $MUL_{b,aff}$  introduced in Clause 4, for the specific value  $b$  related to the elliptic curve  $E$ .

NOTE 2 There are various options to provide the verifiers with trusted copies of the claimant's public key. This topic is beyond the scope of this part of ISO/IEC 29192.

### 8.3 Key production

To produce a key pair, the following two steps shall be performed.

- a) For claimant  $A$  an integer  $Q$  shall be uniformly and randomly selected from the set  $\{2, \dots, q_1-1\}$ . The integer  $Q$  is  $A$ 's private key.
- b)  $A$ 's public key  $G(A)$  is  $MUL_{b,aff}(Q, x_p)$ , the (affine)  $x$ -coordinate of the point  $G = [Q]P = (x_G, y_G)$ .

8.4 Unilateral authentication mechanism

This mechanism, which enables verifier *B* to authenticate claimant *A*, is summarized in Figure 3. In Figure 3, the bracketed letters a) to e) correspond to the steps of the mechanism, including the exchanges of information, as described in detail below.

NOTE The authentication mechanism follows a “challenge-response” approach.

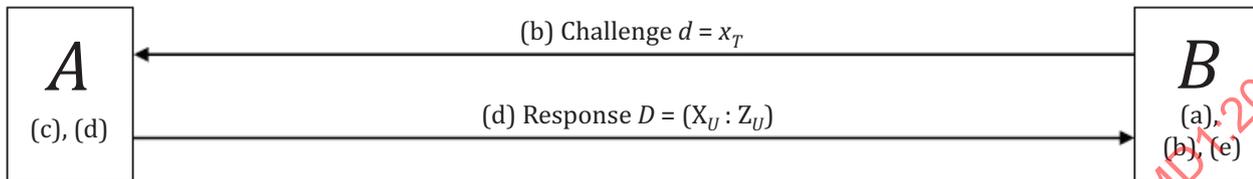


Figure 3 — ELLI

The following procedure shall be performed. The verifier *B* shall only accept the claimant *A* as valid if the following procedure completes successfully:

- a) The verifier randomly chooses a fresh number  $r$  with  $0 < r < q_1$  and computes  $MUL_{b,aff}(r, x_p)$  and  $MUL_{b,aff}[r, G(A)]$ , i.e. the affine  $x$ -coordinate  $x_T$  of the point  $T = [r]P$  and the affine  $x$ -coordinate  $x_V$  of the point  $V = [r]([Q]P)$ .

The challenge  $d$  is the field element  $d = x_T$ .

- b) The verifier sends  $d$  to the claimant.
- c) On receipt of the challenge  $d$  the claimant *A* computes  $D = MUL_{b,proj}(Q, d) = (X_U : Z_U)$ , the projective  $x$ -coordinate of the point  $U = [Q]T$ , consisting of two field elements  $X_U$  and  $Z_U$  in  $F(2^g)$ .

$D = (X_U : Z_U)$  is the response.

- d) The claimant sends  $D$  to the verifier.
- e) On receipt of the response  $D$ , the verifier *B* checks if  $X_U = 0_F$  or  $Z_U = 0_F$  holds. If one of these equations holds, the claimant is considered not authentic.

If  $X_U \neq 0_F$  and  $Z_U \neq 0_F$  the verifier computes  $x_V Z_U$  in  $F(2^g)$  and verifies whether or not the equation  $X_U = x_V Z_U$  holds in  $F(2^g)$ . The claimant is considered authentic by the verifier if and only if the equation  $X_U = x_V Z_U$  holds.

Replace the content with the following:

```

LightweightCryptography-4{
    iso(1) standard(0) lightweight-cryptography(29192)
    part4(4) asn1-module(0) algorithm-object-identifiers(0)
    DEFINITIONS ::= BEGIN
EXPORTS ALL;

OID ::= OBJECT IDENTIFIER -- alias
-- Synonyms
is29192-4 OID ::= {iso(1) standard(0) lightweight-cryptography(29192) part4(4)}
    
```

```

mechanism OID ::= {is29192-4 mechanisms(1)}
-- Lightweight cryptographic mechanisms
lw-discrete-logarithms-ecc-CryptoGPS OID ::= {mechanism
lw-discrete-logarithms-ecc-CryptoGPS(1)}
lw-authenticated-key-exchange-ALIKE OID ::= {mechanism
lw-authenticated-key-exchange-ALIKE(2)}
lw-identity-based-signature-IBS OID ::= {mechanism
lw-identity-based-signature-IBS(3)}
lw-unilateral-authentication-ecc-ELLI OID ::= {mechanism
lw-unilateral-authentication-ecc-ELLI (4)}

END -- LightweightCryptography-4

```

**Page 21, Annex C**

Add the following after C.3.3.2, Example 2:

**C.4 ELLI mechanism**

**C.4.1 Examples based on ELLI\_163.1**

**C.4.1.1 Common properties**

The elliptic curve ELLI\_163.1 and the underlying field  $F(2^g)$  are defined as in Annex E.3. In the following, numerical examples for the ELLI authentication scheme are given, comprising the steps key generation, challenge generation and response generation.

A common base point  $P$  is used in all examples for ELLI\_163.1.

BASE POINT $P$	
$x_p$	6 2DAE88E2 17BEFF09 F408E8F8 91EC8E51 05C9E8AB
$y_p$	0 5B29A42D C1EBEB2D 14AC1914 421FC4AC 2B61C7E5
NOTE The $y$ -coordinate $y_p$ of the base point $P$ is not necessarily used in the ELLI mechanism.	

**C.4.1.2 Example 1**

A key pair for claimant A is constructed.

KEY PAIR GENERATION	
PRIVATE KEY $Q$	DFCAC3BC 9A1E4B54 E03FAD6E E932F3BC 61170C51
PUBLIC KEY $G(A)$	2 33C2A2B8 8BEE7DD9 1DB430F9 161B0A88 B7FEB527

A challenge  $d$  is generated by the verifier with input a random number  $r$  and the  $x$ -coordinate  $x_p$  of the base point and using the function  $MUL_{b,aff}$ .

$$d = MUL_{b,aff}(r, x_p)$$

The response  $D$  is generated by the claimant with input the challenge  $d$  and the private key  $Q$  and using the function  $MUL_{b,proj}$ .

$$D = (X_u : Z_u) = MUL_{b,proj}(Q,d)$$

CHALLENGE GENERATION $d = MUL_{b,aff}(r, x_p)$	
RANDOM NUMBER $r$	93D4625C 890DE3CD 8889225C 180E03C3 DF647545
CHALLENGE $d$	5 3735DD9D 700B0617 D6B0FE8E B0BA11D8 65D9532F
POSSIBLE RESPONSE $D = (X_u : Z_u)$	
X-VALUE $X_u$	3 F625D290 2FE3297F A177959A AD59AA0B 9D913C07
Z-VALUE $Z_u$	0 447352DD 05B0568B 191865A5 1FA0779C DD81258D
$x_v = X_u Z_u^{-1}$ (affine)	4 531ADD58 617220E6 4A3915D5 6BCD69FD F434A2F2

NOTE The pair  $(X_u : Z_u)$  is the “projective x-coordinate”, and hence is not unique as numerical value. The adjoined unique numerical value related to the response is the affine x-coordinate  $x_v = X_u Z_u^{-1}$ . This holds in the same way for all the following examples.

**C.4.1.3 Example 2**

KEY PAIR GENERATION	
PRIVATE KEY $Q$	DE5A6D34 F3A8C4E1 6E132FD4 33F4B4BD 65E20CB9
PUBLIC KEY $G(A)$	3 E8462A29 41BB3D71 433AEB2C 67877D4B 88D5529D
CHALLENGE GENERATION $d = MUL_{b,aff}(r, x_p)$	
RANDOM NUMBER $r$	F9B6C01B CD3A85A8 99986F79 F4AFD289 056A3842
CHALLENGE $d$	61FE5AEC F245ECE4 B504CD65F E2D70C9C F28E6626
POSSIBLE RESPONSE $D = (X_u : Z_u)$	
X-VALUE $X_u$	3 8487B630 029D21C3 0768C095 B2AEF06B 63FE8143
Z-VALUE $Z_u$	0 19BF93D2 222E56E0 B8B50A7D B9C41150 B9E9F93C
$x_v = X_u Z_u^{-1}$ (affine)	3 0DFD2997 2FD32C61 7356C895 D6912240 02752BFE

### C.4.1.4 Example 3

KEY PAIR GENERATION	
PRIVATE KEY $Q$	7E96501F 876C785B 1511893E 97F1E923 0967945E
PUBLIC KEY $G(A)$	0 2F1B219C DD1FEBA1 64FB2B1E 805CF6F7 D65C15F7
CHALLENGE GENERATION $d = MUL_{b,aff}(r, x_p)$	
RANDOM NUMBER $r$	E3F72EA8 DF9A7E56 3039CBB3 745C14F9 759E40CF
CHALLENGE $d$	6 9EC45765 264CBA69 BBA3F698 789B06DF 26578B02
POSSIBLE RESPONSE $D = (X_u : Z_u)$	
X-VALUE $X_u$	0 5EE19683 164ABCDC F021A091 8046AA5B 56C6B128
Z-VALUE $Z_u$	2 15B2A8AB 8CFCF47D E173C38A A6BB8F0E 46B19463
$x_v = X_u Z_u^{-1}$ (affine)	7 6F2BC182 34FDAD56 743C0387 90CEC425 54A5BD25

## C.4.2 Examples based on ELLI\_193.1

### C.4.2.1 Common properties

The elliptic curve ELLI\_193.1 and the underlying field  $F(2^g)$  are defined as in Annex E.4. In the following, numerical examples for the ELLI authentication scheme are given, comprising the steps key generation, challenge generation and response generation.

A common base point  $P$  is used in all the following examples for ELLI\_193.1.

BASE POINT $P$	
$x_p$	1 C035F1CF E40C8BC6 B09F59E5 60953526 BB67E2A9 1CCD97B3
$y_p$	1 C848D5FF 00F24C02 63DB3036 3550F134 83769167 68EB72F5
NOTE The $y$ -coordinate $y_p$ of the base point $P$ is not necessarily used in the ELLI mechanism.	

### C.4.2.2 Example 1

A key pair for claimant  $A$  is constructed.

KEY PAIR GENERATION	
PRIVATE KEY $Q$	12A4B91B 45E0E29E 54717EB7 3149B344 260DB6C5 85829BA1
PUBLIC KEY $G(A)$	0 D74E3E63 ABECFFB7 4A57BC37 F0BBA4C2 A9436EF6 2C0C3331

A challenge  $d$  is generated by the verifier with input a random number  $r$  and the  $x$ -coordinate  $x_p$  of the base point  $P$  and using the function  $MUL_{b,aff}$ .

$$d = MUL_{b,aff}(r, x_p)$$

The response  $D$  is generated by the claimant with the challenge  $d$  and the private key  $Q$  as input to the function  $MUL_{b,proj}$ .

$$D = (X_u : Z_u) = MUL_{b,proj}(Q,d)$$

CHALLENGE GENERATION $d = MUL_{b,aff}(r, x_p)$	
RANDOM NUMBER $r$	3B5E7757 6B069EBC 757E6D99 366255E8 64EE6E64 BA8D4318
CHALLENGE $d$	1 342322E0 A5A77B74 92886779 09545939 E590A632 9FF797FD
POSSIBLE RESPONSE $D = (X_u : Z_u)$	
X-VALUE $X_u$	1 3FE539BC 35CAC440 9A30AAAC 9B416E09 44EBBEF8 ED42C259
Z-VALUE $Z_u$	1 8FA597E9 D28CA94D 98C2872B D31D1297 8DEE3580 CC66DFCE
$x_v = X_u Z_u^{-1}$ (affine)	0 E1F66999 BE367042 C851A9E7 33B6A0CE 708C6165 1E6F0F7B

**C.4.2.3 Example 2**

KEY PAIR GENERATION	
PRIVATE KEY $Q$	610C5354 FADFB86E 2893DDC8 D864416F 8E85FFC3 EFC430B2
PUBLIC KEY $G(A)$	1 7AF97A22 51AF656C 054D4F8F D29AAA31 DEF9148B D1B62940
CHALLENGE GENERATION $d = MUL_{b,aff}(r, x_p)$	
RANDOM NUMBER $r$	47B631CF 510FE318 3D4CE47E 42A7F97B 70B3FD05 E9AEB4BE
CHALLENGE $d$	1 48BC609E ECE1EE7A 448900D6 5B2312A2 BB6928EC A7E21FC8
POSSIBLE RESPONSE $D = (X_u : Z_u)$	
X-VALUE $X_u$	1 21A6A15C 09345264 811AD857 6833CAEB 4D1AA265 AB8E3E94
Z-VALUE $Z_u$	0 9D64B2AF 1B5232E7 091B5D9A 9D3A7914 A28EA572 5B760D66
$x_v = X_u Z_u^{-1}$ (affine)	1 0321B38B 4EEFC4B3 A08107E7 D1159CC2 965D3DEC F509A71F

**C.4.2.4 Example 3**

KEY PAIR GENERATION	
PRIVATE KEY $Q$	63825DA5 88BEDD37 3BFE2F2C 9E1E022D 32087314 4401AAD2
PUBLIC KEY $G(A)$	1 D37D06DC 331EB141 03ABFBDD 4BACF334 10EDD836 F79CED32
CHALLENGE GENERATION $d = MUL_{b,aff}(r, x_p)$	
RANDOM NUMBER $r$	69F78993 92558F1A D85A0D9B 853A7880 3F022000 4b28814C
CHALLENGE $d$	0 37D725B7 DB2A168E 9E52BE09 014A3AC3 8B2F802C B8808050
POSSIBLE RESPONSE $D = (X_u : Z_u)$	
X-VALUE $X_u$	1 94F6B90F D19DF28C A91FF7E0 B201F02E E0D4DC31 7BF187AF
Z-VALUE $Z_u$	1 756CEDB1 5052992A 4CD47C22 84487603 FD95FC75 A0BF197E
$x_v = X_u Z_u^{-1}$ (affine)	0 74C9F956 B4E4E893 98A70D23 9C119D7A DE9D5D50 740CD1B7

Page 22, Annex D

Replace Table D.1 by the following:

**Table D.1 — Compliance of algorithms properties with the requirement of ISO/IEC 29192-1**

		Algorithm name				
		cryptoGPS[5]	ALIKE[3]	IBS[9]	ELLI_163.1	ELLI_193.1
<b>Constraints</b>	Chip area	X			X	X
	Energy consumption	X		X	X	X
	Code size and RAM size		X	X	X	X
	Communication bandwidth	X	X	X	X	X
	Execution time	X	X		X	X

Add the following after Table D.4:

**Table D.5 — ELLI characteristics**

		ELLI_163.1	ELLI_193.1
Security level [bits]		80	80
Chip area [GE] based on Hardware Prototype my-d-ECC <sup>[30]</sup>	ELLI module in total	12 876	approx. 15 000
	Storage	5 273	approx. 6 243
	Arithmetic unit + control logic	6 171 + 1 432 = 7 003	approx. 8 750
Authentication process [CLK] based on the architecture of hardware prototype my-d-ECC (163 bit) <sup>[30]</sup>		80 465	approx. 95 000
Energy consumption [μ]		7,5	approx. 10,5
Data to be transferred [bits]		3 × 163	3 × 193

NOTE 1 For the curve ELLI\_163.1, the data in Table D.5 are based on the architecture of the hardware prototype described in Reference [30]. The values for ELLI\_193.1 are partially extrapolated based on the results of Reference [30] assuming an analogous architectural approach.

NOTE 2 Based on the Pollard-Rho algorithm to compute discrete logarithms, one could argue that the security level entries in row two should be set to 81 and 95 respectively. But, according to ISO/IEC 29192, the allowed entries are restricted to the values 80, 112, 128, 192, and 256.

NOTE 3 For the entries in row two of Table D.5, attacks requiring a large number of queries of the algorithm and a large amount of memory are not considered, e.g. exceeding  $2^{34}$  queries and storage of size  $2^{64}$ . If the number of queries to the device is allowed to be  $2^{34,3}$  and a storage of size  $2^{64}$  is assumed to be available for the attack, the security level is decreased to 72 in the case of ELLI\_163.1. See also G.3.

Add the following new Annexes after Annex D:

**Annex E**

(normative)

**ELLI\_163.1 and ELLI\_193.1**

**E.1 General**

Annex E specifies two elliptic curves — ELLI\_163.1 and ELLI\_193.1 — that shall be used in the ELLI-mechanism. In addition, necessary information on how to construct a full set of domain parameters is given.

The elliptic curve ELLI\_163.1 provides a security level of  $\sim 2^{80}$  with respect to the ECDL-problem. The respective value for ELLI\_193.1 is  $>2^{95}$ .

**E.2 Representation of the field  $F(2^g)$  and its elements**

The field  $F(2^g)$  is given as  $F(2)[X]/f(X)$ , where  $f(X)$  is an irreducible polynomial over  $F(2)$  of degree  $g$ . In this model, the elements of  $F(2^g)$  are the polynomials  $b_{g-1}X^{g-1} + b_{g-2}X^{g-2} + \dots + b_1X + b_0$ , with  $b_i \in \{0,1\}$ .

The elements  $(b_{g-1}, b_{g-2}, \dots, b_1, b_0)$  of  $F(2^g)$  are represented as hexadecimal strings, as in ISO/IEC 15946-1.

**E.3 ELLI\_163.1 and related parameters**

The following parameters shall be used with the curve ELLI\_163.1:

$f(X)$	=	$X^{163} + X^{17} + X^6 + X + 1$
	=	8 00000000 00000000 00000000 00000000 00020043
$a$	=	$0_F$
$b$	=	7 640BFEA7 CC3B22CD 51B4217C 25A70C81 E7A7260A
$\#(E)$	=	$4 \cdot q_1$
$q_1$	=	1 FFFFFFFF FFFFFFFF FFFEED90 042B33A9 48E95823
$\#(E_{twist})$	=	$2 \cdot q_2$
$q_2$	=	4 00000000 00000000 000284DF F7A998AD 6E2D4FBB
NOTE "a" is not necessarily used in the ELLI mechanism.		

**E.4 ELLI\_193.1 and related parameters**

The following parameters shall be used with the curve ELLI\_193.1:

$f(X)$	=	$X^{193} + X^{17} + X^{14} + X^{12} + 1$
	=	2 00000000 00000000 00000000 00000000 00000000 00025001
$a$	=	$0_F$
$b$	=	0 5BD20FC9 907A1E5F F4034D4A E883BDF7 5A8E05EA 5E41EC53
$\#(E)$	=	$4 \cdot q_1$
$q_1$	=	7 FFFFFFFF FFFFFFFF FFFFFFFF F38514E9 A5FB4D1E B499AF33
$\#(E_{twist})$	=	$2 \cdot q_2$
$q_2$	=	1 00000000 00000000 00000000 18F5D62C B40965C2 96CCA19B
NOTE "a" is not necessarily used in the ELLI mechanism.		

**Annex F**

(informative)

**Some special properties of elliptic curves over  $F(2^g)$**

The ELLI scheme largely follows the Diffie-Hellman analogue for elliptic curves with the keys of one of the two communicating entities fixed. The ELLI mechanism deviates from this approach in two ways.

- The scheme makes use only of the x-coordinates of points on elliptic curves whereas y-coordinates are completely unconsidered and unused. (This is not to be confused with point compression.)

- There are no checks whether or not a submitted field element is actually the  $x$ -coordinate of some point on the used curve  $E$ .

It is the purpose of this Annex to describe the background of these two specific properties of the ELLI mechanism. It is assumed that the reader has basic knowledge on elliptic curves as far as it is necessary to understand the usage of elliptic curves in asymmetric cryptography.

**Fact 1:** Let  $E = (E_{\{a,b\}})$  be an ordinary elliptic curve over  $F(2^g)$ . The point set  $(E_{\{a,b\}})$  is a finite abelian group of order  $\#(E_{\{a,b\}}) = 2^g + 1 - t$ , where  $t$  is an odd integer with  $|t| \leq 2 \cdot \sqrt{2^g}$ . Furthermore, all the possible odd numbers  $t$  in the interval  $-2 \cdot \sqrt{2^g} \leq t \leq 2 \cdot \sqrt{2^g}$  actually occur. (The parameter  $t$  is known as “trace of the Frobenius endomorphism”).

**Fact 2:** Let  $E = (E_{\{a,b\}})$  be an ordinary elliptic curve over  $F(2^g)$  with  $\#(E_{\{a,b\}}) = 2^g + 1 - t$ . Then, for the order of an elliptic curve  $(E_{\{a',b\}})$  over  $F(2^g)$  with arbitrary element  $a' \in F(2^g)$ , there are exactly two possibilities:

Case (1):  $\#(E_{\{a',b\}}) = \#(E_{\{a,b\}}) = 2^g + 1 - t$ ;

Case (2):  $\#(E_{\{a',b\}}) = \#(E_{\{a,b\}}) + 2 \cdot t = 2^g + 1 + t$ .

The mathematical background of Fact 2 is related to the concepts of isomorphic elliptic curves and twisted elliptic curves, namely:

Let  $(E_{\{a,b\}})$  and  $(E_{\{a',b'\}})$  be ordinary elliptic curves over the finite field  $F(2^g)$  with Weierstrass equations  $Y^2 + XY = X^3 + aX^2 + b$  and  $Y^2 + XY = X^3 + a'X^2 + b'$ , respectively. Then the following properties hold:

- $(E_{\{a,b\}})$  and  $(E_{\{a',b'\}})$  are isomorphic if and only if  $b' = b$  and  $\text{Tr}(a') = \text{Tr}(a)$ ;
- $(E_{\{a',b\}})$  and  $(E_{\{a,b\}})$  are twisted if and only if  $b' = b$  and  $\text{Tr}(a') \neq \text{Tr}(a)$ ;
- in Case (1), the curve  $(E_{\{a',b\}})$  is isomorphic to  $(E_{\{a,b\}})$ ;
- in Case (2), the curve  $(E_{\{a',b\}})$  is twisted to  $(E_{\{a,b\}})$ .

**NOTE 1** The notion of “isomorphic elliptic curves” is here to be understood in the sense of isomorphism of algebraic varieties, i.e. without consideration of the group structure induced on the elliptic curve. This notion of isomorphism is distinct from and should not be confused with “point groups of elliptic curves isomorphic as finite groups”.

**NOTE 2** A first consequence of Fact 1 and Fact 2 is that the order of an ordinary elliptic curve over  $F(2^g)$  is always even and that, if the curves from Case (1) have order  $\equiv 2$  modulo 4, then the curves from Case (2) necessarily have order  $\equiv 0$  modulo 4, and the other way around.

**NOTE 3** For the ELLI scheme, the elliptic curves are chosen such that orders of both classes have the best possible prime factorization:  $\#(E) = 4 \cdot q_1$  and  $\#(E_{\text{twist}}) = 2 \cdot q_2$ , with  $q_1$  and  $q_2$  primes.

**Fact 3:** Let  $k$  be an arbitrary positive integer and let  $P$  be a point on the ordinary elliptic curve  $(E_{\{a,b\}})$ . Then, the  $x$ -coordinate of  $[k]P$  is **independent** from the curve parameter  $a$  and the  $y$ -coordinate of the point  $P$ . It depends only on the curve parameter  $b$  and the  $x$ -coordinate of the point  $P$ .

(For a proof, see Reference [28], p. 42.)

**Fact 4:** Let  $x$  be an arbitrary element from  $F(2^g)$ . For a fixed value  $b$  from  $F(2^g)$ ,  $x$  is **always** the  $x$ -coordinate  $x_R$  of a point  $R$  on some ordinary elliptic curve over  $F(2^g)$  with parameter  $b$ , namely

- either  $R$  is on a curve isomorphic to  $E = (E_{\{a,b\}})$ , or
- $R$  is on a twisted curve  $(E_{\text{twist}})$  of  $E$ .

(For a proof, see Reference [28], p. 26 and p. 38.)

As a consequence of these facts, one can introduce the two functions  $MUL_{b,proj}$  and  $MUL_{b,aff}$  used in the ELLI mechanism.

$$— \quad MUL_{b,proj}(k, x_r) := (X_s : Z_s), \text{ if } S = [k]R = (X_s : Y_s : Z_s)$$

$$— \quad MUL_{b,aff}(k, x_r) := X_s Z_s^{-1}, \text{ if } S = [k]R = (X_s : Y_s : Z_s)$$

Here,  $k$  is an arbitrary positive integer;  $x_r$  is a field element and hence, the affine  $x$ -coordinate of some point  $R$  on an elliptic curve, namely either on  $E = (E_{\{a,b\}})$  or on a twisted curve,  $E_{twist}$  of  $E$ .

IECNORM.COM : Click to view the full PDF of ISO/IEC 29192-4:2013/Amd.1:2016