

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


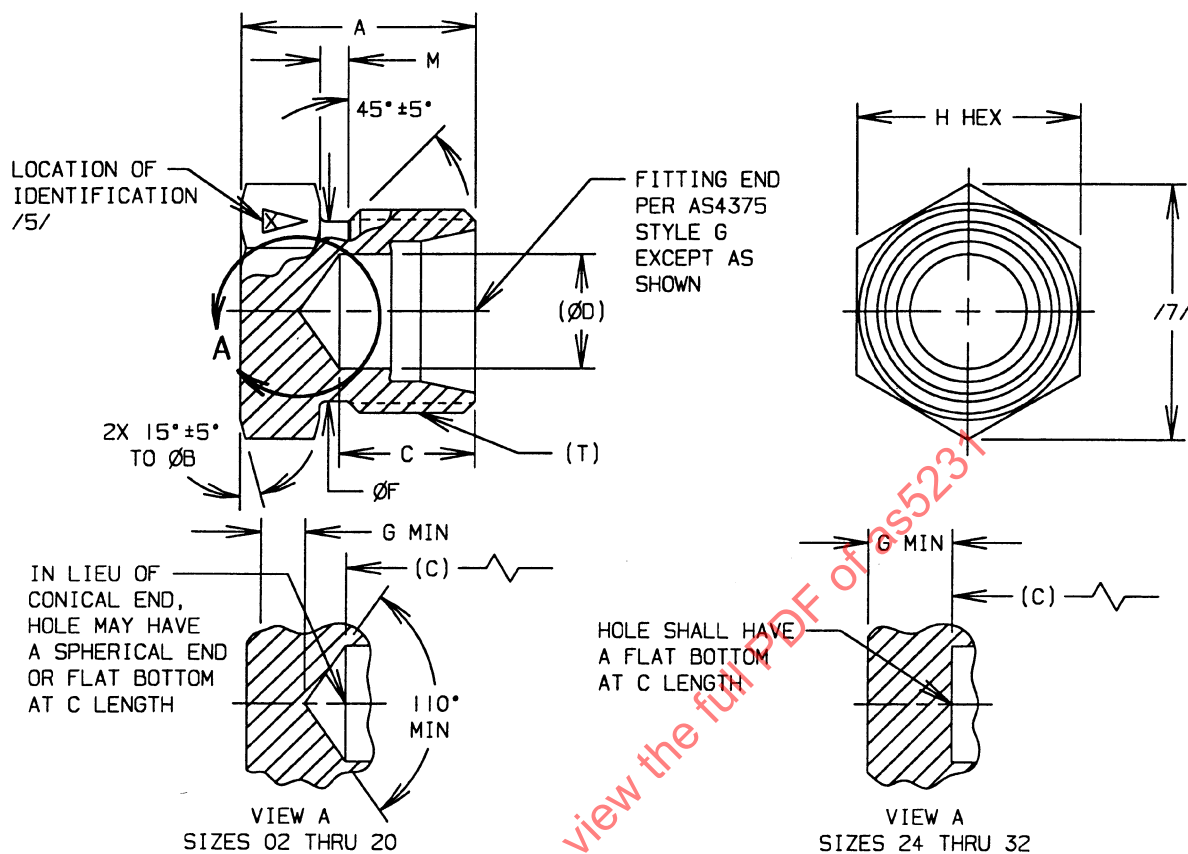


FIGURE 1 - FITTING, PLUG

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS4444

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING, PLUG, TUBE END, FLARELESS

AS5231
SHEET 1 OF 4

TABLE 1 - DIMENSIONS

BASIC NO. AS5231 /13/ SIZE CODE	(NOMINAL TUBE SIZE)	T THREAD PER MIL-S-8879 CLASS 3A	A	B ±.010	C	D
02	.125	.3125-24 UNJF	.562	.418	.371	.093
03	.188	.3750-24 UNJF	.609	.418	.407	.125
04	.250	.4375-20 UNJF	.641	.480	.417	.187
05	.312	.5000-20 UNJF	.672	.542	.416	.234
06	.375	.5625-18 UNJF	.719	.605	.441	.297
08	.500	.7500-16 UNJF	.844	.792	.491	.422
10	.625	.8750-14 UNJF	.984	.918	.604	.500
12	.750	1.0625-12 UNJ	1.031	1.103	.564	.656
14	.875	1.1875-12 UNJ	1.062	1.228	.557	.765
16	1.000	1.3125-12 UNJ	1.062	1.353	.519	.875
20	1.250	1.6250-12 UNJ	1.094	1.666	.428	1.093
24	1.500	1.8750-12 UNJ	1.094	1.978	.812	1.344
32	2.000	2.5000-12 UNJ	1.094	2.599	.812	1.813

TABLE 1A - DIMENSIONS AND WEIGHTS

BASIC NO. AS5231 /13/ SIZE CODE	F +.002/- .003	G	H	M +.015/- .000	LB/EA MAX AL	LB/EA MAX STEEL	LB/EA MAX TI
02	.250	.109	.428- .440	.063	.00571	.0164	.00904
03	.312	.109	.428- .440	.063	.00717	.0206	.0114
04	.364	.109	.490- .502	.075	.00938	.0269	.0148
05	.426	.125	.552- .565	.075	.0128	.0369	.0203
06	.481	.125	.615- .628	.083	.0167	.0480	.0265
08	.660	.156	.802- .815	.094	.0332	.0952	.0525
10	.773	.156	.928- .941	.107	.0532	.153	.0843
12	.945	.188	1.113-1.128	.125	.0801	.230	.127
14	1.070	.188	1.238-1.253	.125	.103	.295	.163
16	1.195	.188	1.363-1.380	.125	.128	.366	.202
20	1.507	.234	1.676-1.693	.125	.212	.610	.336
24	1.756	.234	1.988-2.005	.125	.224	.644	.355
32	2.381	.328	2.609-2.635	.125	.391	1.12	.620

NOTES:

/1/ MATERIAL:

- a. DASH AS CODE LETTER - TYPE 4130 CARBON STEEL BAR PER MIL-S-6758 OR AMS 6370. /2/
- b. CODE LETTER D - TYPE 2024-T6 ALUMINUM ALLOY BAR PER QQ-A-225/6 OR AMS 4112 OR TYPE 2024-T851 ALUMINUM ALLOY BAR PER QQ-A-225/6. /2/
- c. CODE LETTER J - TYPE 304 CORROSION RESISTANT STEEL BAR PER QQ-S-763 OR AMS 5639.
- d. CODE LETTER K - TYPE 316 CORROSION RESISTANT STEEL BAR PER QQ-S-763 OR AMS 5648.
- e. CODE LETTER R - TYPE 321 CORROSION RESISTANT STEEL BAR PER QQ-S-763 OR AMS 5645.
- f. CODE LETTER T - TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS 4928.
- g. CODE LETTER W - TYPE 7075-T73 ALUMINUM ALLOY BAR PER QQ-A-225/9 OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124. /2/

/2/ HEAT TREATMENT:

- a. DASH AS CODE LETTER - SEE HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.
- b. CODE LETTERS D AND W - SEE ELECTRICAL CONDUCTIVITY AND HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.
- c. OTHER CODE LETTERS - NONE.

3. FINISH:

- a. DASH AS CODE LETTER - CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2 AND COAT WITH A LIGHT FILM OF OIL PER PROCUREMENT SPECIFICATION.
- b. CODE LETTER D - ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, DYE GREEN, DUPLEX SEAL PER PROCUREMENT SPECIFICATION.
- c. CODE LETTER J, K AND R - PASSIVATE PER QQ-P-35, TYPE VI OR VII.
- d. CODE LETTER T - ANODIZE PER AMS 2488 OR FLUORIDE PHOSPHATE CONVERSION COAT PER AMS 2486 WITH COLOR PER PROCUREMENT SPECIFICATION.
- e. CODE LETTER W - ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, DYE BROWN, DUPLEX SEAL PER PROCUREMENT SPECIFICATION.

/4/ PROCUREMENT SPECIFICATION: AS4444 EXCEPT AS SPECIFIED ON THIS STANDARD. THIS PART SHALL BE QUALIFIED TO THE PROCUREMENT SPECIFICATION IN A COMPLETE ASSEMBLY AS APPLICABLE. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS.

/5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C, D OR METHOD 7A3, 15A3, OR 15B.

- a. FOR SIZE 06 AND SMALLER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTER "AS" AND MATERIAL CODE LETTER.
- b. FOR SIZE 08 AND LARGER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER AND MATERIAL CODE LETTER.